# **User Guide**

### **MOBOTIX MOVE 2MP IR Vandal Turret**

© 2025 MOBOTIX AG







Beyond **Human Vision** 

**MOBOTIX MOV**®

# **Table of Contents**

Table of Contents	2
Before You Start	5
Support	ε
MOBOTIX Support	ε
MOBOTIX eCampus	ε
MOBOTIX Community	ε
Safety Notes	7
Legal Notes	7
Overview	g
Features	10
Package Contents	
Accessories for Vandal Turret Cameras	
Dimensions	17
Accessories for All Cameras	
Further Reading	26
Connection	27
Connecting Power	28
Connecting Ethernet Cable	28
Installation	29
General Remarks	30
Configuration	31
System Requirements for Operating the Camera	32
Accessing the Camera	
Web Interface - Basic Functions	
Live View	
Media Player	
Video Analytics	35
Configuration	36
Encode	36
Image	40
Video	47
Network	51
System	66
Account	72
Event Source	74

Video Analytics	84
Event Setting	89
Technical Support Information	97
Technical Specifications	
DORI Specifications	102
DORI Levels According to IEC EN62676-4: 2015	102
DORI Distances	102

1

# **Before You Start**

This section contains the following information:

Support	6
Safety Notes	7
Legal Notes	7

# **Support**

### **MOBOTIX Support**

If you need technical support, please contact your MOBOTIX dealer. If your dealer cannot help you, he will contact the support channel to get an answer for you as quickly as possible.

If you have internet access, you can open the MOBOTIX help desk to find additional information and software updates.





#### **MOBOTIX eCampus**

The MOBOTIX eCampus is a complete e-learning platform. It lets you decide when and where you want to view and process your training seminar content. Simply open the site in your browser and select the desired training seminar. Please visit www.mobotix.com/ecampus-mobotix.



### **MOBOTIX Community**

The MOBOTIX community is another valuable source of information. MOBOTIX staff and other users are sharing their information, and so can you.

Please visit **community.mobotix.com**.



# **Safety Notes**

- This camera must be installed by qualified personnel and the installation should conform to all local codes.
- This product must not be used in locations exposed to the dangers of explosion.
- Do not use this product in a dusty environment.
- Protect this product from moisture or water entering the housing.
- Install this product as outlined in this document. A faulty installation can damage the product!
- Do not replace batteries of the device. If a battery is replaced by an incorrect type, the battery can explode.
- Install device out of reach for children.
- External power supplies must comply with the Limited Power Source (LPS) requirements and share the same power specifications with the camera.
- To comply with the requirements of EN 50130-4 regarding the power supply of alarm systems for 24/7 operation, it is highly recommended to use an uninterruptible power supply (UPS) for backing up the power supply of this product.

**NOTE!** Observe the <u>MOBOTIX MOVE Installation Hints</u> document to ensure optimum performance of the camera features.

## **Legal Notes**

#### **Legal Aspects of Video and Sound Recording**

You must comply with all data protection regulations for video and sound monitoring when using MOBOTIX AG products. Depending on national laws and the installation location of the cameras, the recording of video and sound data may be subject to special documentation or it may be prohibited. All users of MOBOTIX products are therefore required to familiarize themselves with all applicable regulations and to comply with these laws. MOBOTIX AG is not liable for any illegal use of its products.

#### **Declaration of Conformity**

The products of MOBOTIX AG are certified according to the applicable regulations of the EC and other countries. You can find the declarations of conformity for the products of MOBOTIX AG on

<u>www.mobotix.com</u> under **Support > Download Center > Marketing & Documentation > Certificates & Declarations of Conformity**.

#### **RoHS Declaration**

The products of MOBOTIX AG are in full compliance with European Unions Restrictions of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS Directive 2011/65/EC) as far as they are subject to these regulations (for the RoHS Declaration of MOBOTIX, please see <a href="https://www.nobotix.com">www.nobotix.com</a>, Support > Download Center > Marketing & Documentation > Brochures & Guides > Certificates).

#### **Disposal**

Electrical and electronic products contain many valuable materials. For this reason, we recommend that you dispose of MOBOTIX products at the end of their service life in accordance with all legal requirements and regulations (or deposit these products at a municipal collection center). MOBOTIX products must not be disposed of in household waste! If the product contains a battery, please dispose of the battery separately (the corresponding product manuals contain specific directions if the product contains a battery).

#### Disclaimer

MOBOTIX AG does not assume any responsibility for damages, which are the result of improper use or failure to comply to the manuals or the applicable rules and regulations. Our General Terms and Conditions apply. You can download the current version of the **General Terms and Conditions** from our website at <a href="www.mobotix.com">www.mobotix.com</a> by clicking on the corresponding link at the bottom of every page. It is the User's responsibility to comply with all applicable local, state, national and foreign laws, rules, treaties and regulations in connection with the use of the Software and Product, including those related to data privacy, the Health Insurance Portability and Accountability Act of 1996 (HIPPA), international communications and the transmission of technical or personal data.

# **Overview**

This section contains the following information:

Features	10
Package Contents	10
Accessories for Vandal Turret Cameras	11
Accessories for All Cameras	22
Further Reading	26

#### **Features**

The MOBOTIX MOVE 2MP IR Vandal Turret is designed to bring clarity and vigilance to your surveillance needs. This state-of-the-art turret camera with DNN-based video analytics combines advanced features with a compact and sleek design, making it an ideal choice for various indoor and outdoor applications. The camera's weather-resistant design IP67 and IK10 ensures reliable operation even in challenging environmental conditions. Its compact turret form factor, combined with easy installation options, makes it a hassle-free choice.


- High Low-Light sensitivity
- 1/2.8" Progressive CMOS
- Fixed Lens 2.8mm
- WDR up to 120 dB
- Integrated IR Illumination, working distance up to 30 m/98 ft
- Triple Streaming H.264/H.265/MJPEG
- 2D & 3D Motion Compensated Noise Reduction (MCTF)
- ONVIF Profile S/G/T/M support
- Micro SD Card supports up to 512 GB.
- Integrated Microphone
- NDAA compliant
- DNN-based object detection with filtering (people/vehicles, etc.)

- Dual power Supply IEEE802.3af Class 3 / DC 12
- Temp. Range –30°C to 60°C/-22°F to 140 °F with integrated heater ON
- Protection Rate IP67 / IK10
- Intelligent Encoding, Smart Low Bitrate Control is same as Smart compression offering optimally useable bandwidth and storage.

**NOTE!** Observe the <u>MOBOTIX MOVE Installation Hints</u> document to ensure optimum performance of the camera features.

# **Package Contents**

Check the package for the items listed below.

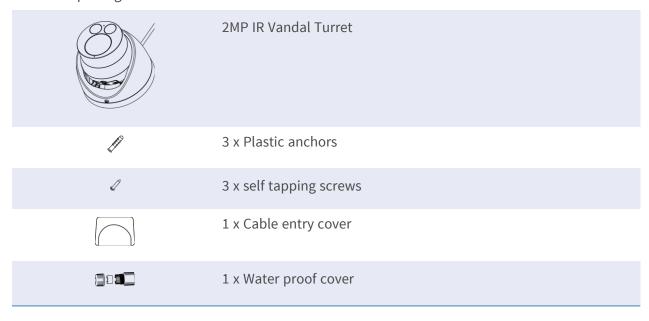



1 x Security Torx Wrench (T10) \* 1



1 x Drilling template

# **Accessories for Vandal Turret Cameras**

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
		Mx-M-SD-W or Mx-M-SD-WL.	SPCC steel, hammer- blow painted RAL9003	2.17 kg
		caution! Can- not be used with MX-M-SD-WM or Mx-M-SD-WMJB!		
Mx-M-SD-C				
	·	Mx-M-SD-W or Mx-M-SD-WL.	Zinc-gal- vanized SECC steel, powder- coated RAL9003	1.58 kg
		caution! Can- not be used with MX-M-SD-WM or Mx-M-SD-WMJB!		
Mx-M-SD-P				

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
	Weatherproof pole mount <b>for extreme</b>	Mx-M-SD-W or Mx-M-SD-WL.	Stainless steel 3 mm,	1.23 kg
	conditions.	caution! Can- not be used with MX-M-SD-WM or Mx-M-SD-WMJB!	white	
MX-MH-SecureFlex-ESWS				
	Weatherproof wall mount for MOVE Speed Dome/Van- dal Multi- sensor/Vandal Turret cameras.	All MOVE Speed Dome/Vandal Multisensor/Vandal Turret cameras. Can be combined with Mx-M-SD-C or Mx-M-SD-P and camera adaptor	Die-cast ADC12 aluminium alloy, hammer-blow painted RAL9003	0.84 kg
Mx-M-SD-W		plates (MX-M-VT-AP, MX-M-VMSD-AP).		
Mx-M-SD-WL	Extended weather- proof wall mount for MOVE Speed Dome/Vandal Multi- sensor/Vandal Tur- ret cameras.	All MOVE Speed Dome/Vandal Multisensor/Vandal Turret cameras. Can be combined with Mx-M-SD-C or Mx-M-SD-P and camera adaptor plates (MX-M-VT-AP, MX-M-VM-AP, Mx-M-VMSD-AP).	Die-cast ADC12 aluminium alloy, hammer-blow painted RAL9003	1.5 kg

Weight

1.3 kg

Material/

Color

Die-cast

#### Picture/ **Order Code**



MX-M-SD-WM


### Description

Weatherproof wall mount for MOVE Speed Dome/Vandal Multisensor/Vandal Turret cameras. Can also be mounted on top of wall mount junction box AP, Mx-M-VMSD-MX-M-SD-WMJB.


#### Compatible **Products**

All MOVE Speed Dome/Vandal Multi- ADC12 alusensor/Vandal Turret cameras. Can be combined with camera adaptor plates (MX-M-VT-AP, MX-M-VM-

# minium alloy, RAL9003



AP).







MX-M-SD-WMJB

Weatherproof wall mount junction box Dome/Vandal Tur-(IP66) for Mx-M-SD- ret cameras. WM.

Allows for comfortable cabling and installation of additional HW equipment such as PoE Injectors, lightning protection, etc.

All MOVE Speed

**CAUTION!** Only to be used as base for Mx-M-SD-WM (wall mount is mounted on top of junction box).

Steel, powdercoated RAL9003 Junction box: Die-cast ADC12 aluminium alloy, RAL9003

Bracket:

#### Picture/ **Order Code**

**Accessories for Vandal Turret Cameras** 



# **Description**

incl. base mount, 25 cm/10 in pendant pipe, installation materials and safety 1 m/39 in.

#### Compatible **Products**

Pendant mount kit All MOVE Speed Dome/Vandal Multi- ADC10 alusensor/Vandal Turret cameras. Can be combined with camera wires 50 cm/20 in & adaptor plates (MX- RAL9003 M-VT-AP, MX-M-VM-AP, Mx-M-VMSD-AP).

#### Material/ Color

Die-cast minium alloy, powdercoated

Weight

1.58 kg

MX-M-SD-PM



Extension pipe M-SD-PM.

Extends MX-M-SD-25 cm/10 in for MX- PM; max. extended ADC10 alutotal length is 1 m/39 in (3 extensions).


Die-cast minium alloy, powdercoated RAL9003 0.8 kg

MX-M-SD-PMEXT

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
MX-M-SD-GN	Weatherproof parapet mount (goose neck; IP66) with integrated junction box. Integrated junction box allows for comfortable cabling and installation of additional hardware equipment such as PoE Injectors, lightning protection, etc.	Dome/Vandal Multi- sensor/Vandal Tur-	Bracket and goose neck: Steel, powder- coated RAL9003 Junction box: Die-cast ADC12 alu- minium alloy, RAL9003	14.8 kg
Mx-M-VT-AP	Adapter mounting plate for MOVE Vandal Turret cameras.		Bracket: Diecast ADC12 aluminium alloy, stoveenamel finish RAL9003 Mounting plate: A1050P aluminium alloy, stoveenamel finish RAL9003	0.3 kg


Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
	Wall mount for MOVE Vandal Tur- ret cameras.	All MOVE Vandal Turret (VT) cameras. Can be combined with Mx-M-VT-JB.	A1050P aluminium alloy, stove- enamel finish RAL9003	0.3 kg


Mx-M-VT-WM

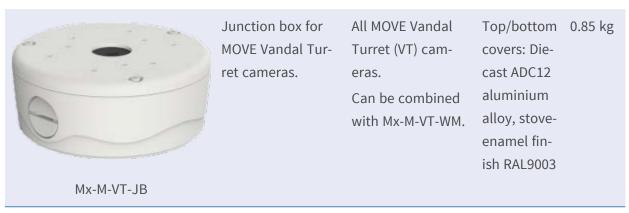


### **Dimensions**


### Order Code Dimensions

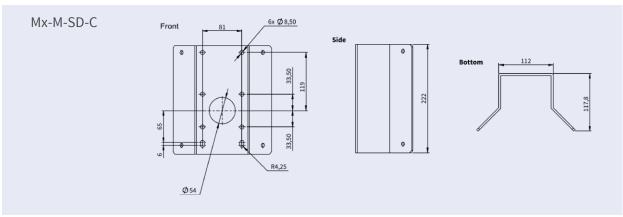

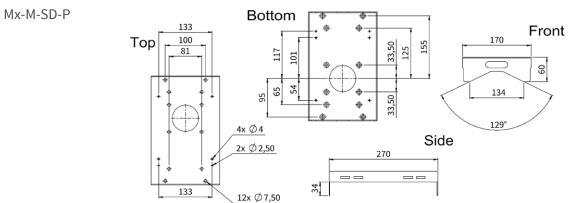

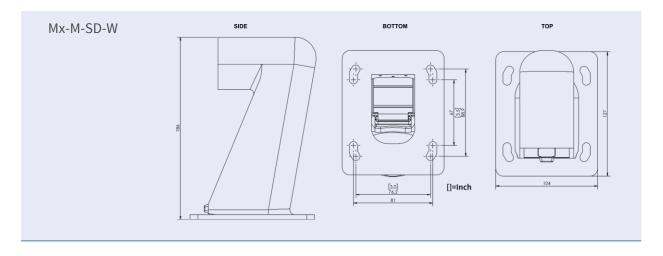



### **Order Code Dimensions** Mx-M-SD-WL 348,00 104,00 16,50 -ф--ф-98,50 138,57 --81,00 MX-M-SD-WM 140 108 249 0 MG 1 1/2"PF 167 200 58 0100 0 MX-M-SD-PM Side Front Bottom Тор 250 290 77,8 40 175

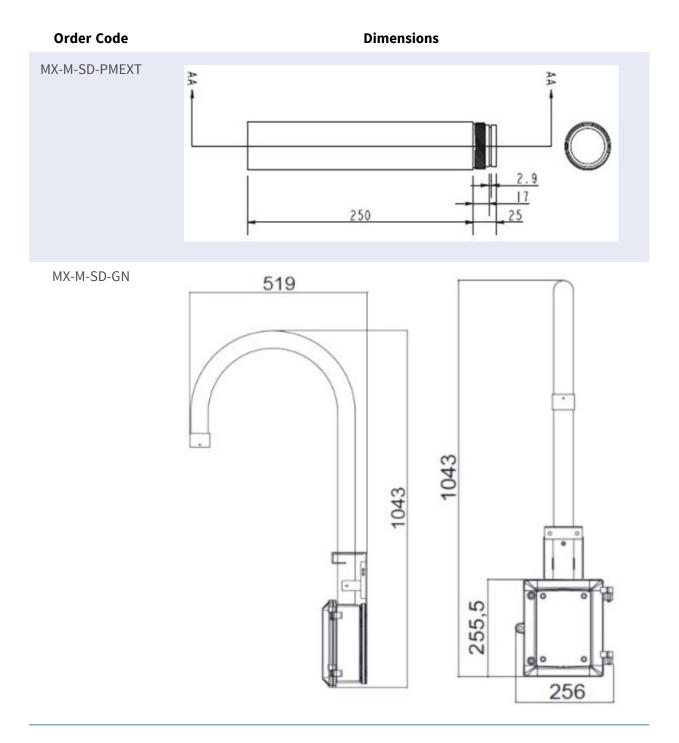


#### **Order Code**

#### **Dimensions**

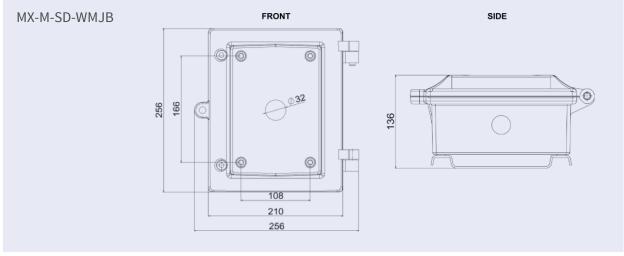

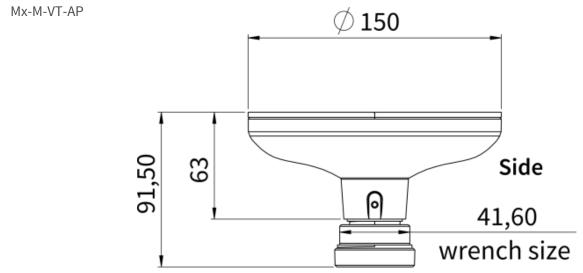

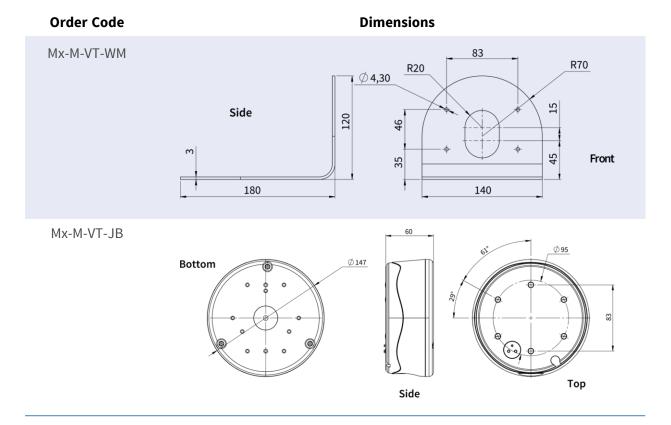

All measurements in mm.

# **Accessories for All Cameras**

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
MX-NPA-UPOE1A-60W	UPoE Power Injector 60W.  PoE++ 60W Network Power injector • AC Input Voltage: 100 to 240 VAC (50 to 60Hz) • AC Input Current: 1.5A @100-240 VAC • Operating Ambient Temperature: • -10° to 40°C @60W • -10° to 50°C, humidity 10 to 90% @30W • IEEE 802.3bt compliant • Output power of 60W over 4- pairs • Supports 10/100/1000Base-T applications • Plug-and- play installation • Full Protection OVP, OCP• Supports 10/100/1000Base-T applications.	All cameras.	Plastic housing, black	0.45 kg
Mx-A-ETP1A-2601-SET	Media converter set Ethernet(PoE+) – Twisted-Pair.  Complete set consisting of two two-wire transmit/receive units for establishing an Ethernet transmission path via twisted-pair cables. •	All cameras. Requires Mx-A-ETP1A-2601-POW.	Plastic housing, black	0.368 kg

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
	Transmission of Eth-			
	ernet and PoE+ power			
	supply via two-wire line			
	according to IEEE1901.			
	<ul> <li>Simple connection of</li> </ul>			
	10/100 Mbps Ethernet			
	end devices • Max. 95			
	Mbps transmission			
	bandwidth, range up to			
	600 m/656 yd for data			
	only, 300 m/328 yd for			
	PoE depending on the			
	quality of the twisted-			
	pair link • 128 bit AES			
	network data encryp-			
	tion • Power supply 2-			
	wire transmitter (Tx)			
	and receiver (Rx) as well			
	as end device via PoE+			
	network switch or			
	external power supply			
	56VDC / 1.2A (not			
	included!) • Connected			
	end devices are sup-			
	plied via PoE switch			
	IEEE802.3af(PoE),			
	IEEE802.3at (PoE+),			
	UPoE up to 60W			
	(requires ext. power sup-			
	ply unit). • Status LEDs			
	(data, power supply,			
	data link, PoE) • Integ-			
	rated Overvoltage pro-			
	tection (IEC 61000-4-5			
	4kV(1.2 / 50us), 2kA(8 /			
	20us)) • Power Supply:			
	TX: T-Linx or			

Picture/ Order Code	<b>Description</b> 102g • Warranty: 2 years	Compatible Products	Material/ Color	Weight
Mx-A-ETP1A-2601-POW	Plug-type power supply for Mx-A-ETP1A-2601- SET. Output: 57V DC +/-3% / 1.2 A • Input: 90-260V AC (47-63Hz) • 68,4 Watt • Operating Temperature: 0-40°C/32-122°F	Mx-A-ETP1A- 2601-SET	Plastic housing, black	0.49 kg
Mx-A-KBD1A-PTZ-JOG	MOBOTIX USB Keyboard with PTZ Joystick & Jog-Shuttle.  USB control panel for operating MOBOTIX MxMC 2.6 and higher and MOBOTIX HUB incl.  Control of software PTZ and motorized PTZ cameras and pan/tilt devices • Integrated 3-axis joystick • Integrated jog shuttle • 38 control keys with backlight predefined for MxMC functions or freely definable for MOBOTIX HUB • Integrated alarm buzzer • Suitable for operation as HID device on MOBOTIX VMS with Windows and MAC based operating systems via USB 2.0 • Suitable for		Plastic housing, black	1.9 kg

Picture/ Order Code	Description	Compatible Products	Material/ Color	Weight
	right- and left-handed users • Power supply: USB, max. 350 mA • Operating temperature: 0°-45°C/32-113 °F.			
MX-SWITCH1	MOBOTIX network switch for DIN (top-hat) rail mounting.  5x RJ45 port with 100 MBit/s (1x uplink, 4x PoE+ with max. 75 W). Supply: 48 V DC, max. 75 W. Simplified cabling for door stations due to available connectivity for anti-theft protection, door opener and MxBus. MxBus, anti-theft protection, door and lock contact can be connected via separate wires of Ethernet cable.	All cameras.	Plastic housing, gray	0.31 kg

# **Further Reading**

Manuals and Quick Installation documents

Technical Specifications

MOBOTIX MOVE Installation Hints

MOBOTIX Community

3

# Connection

This section contains the following information:

Connecting Power	28
Connecting Ethernet Cable	28

# **Connecting Power**

#### **Using Power over Ethernet (PoE)**

Use a PoE+ switch (Class 3) and connect the Ethernet cable to the RJ-45 port of the camera.

#### **Using DC**

To power up the camera, connect the DC power source (min. 10 W) to the DC power connector of the camera.

# **Connecting Ethernet Cable**

#### **Ethernet Cable Connection**

#### NOTE!

- The length of the Ethernet cable should not exceed 100 m/300 ft.
- Check the status of the link indicator and the activity indicator LEDs of the switch. If the LEDs are unlit, please check the LAN connection.
- In some cases, an Ethernet crossover cable may be needed when connecting the camera directly to the PC.

#### **Ethernet Connector LEDs**



- Green **Link** LED indicates good network connection.
- Orange Activity LED flashes to indicate network activity.

4

# **Installation**

This section contains the following information:	
General Remarks	3(

# **General Remarks**

Read the instructions provided in this chapter thoroughly before installing the camera.

**NOTE!** This camera must be installed by qualified personnel and the installation must conform to all local codes.

**NOTE!** Observe the <u>MOBOTIX MOVE Installation Hints</u> document to ensure optimum performance of the camera features.

# Configuration

This section contains the following information:

System Requirements for Operating the Camera	
Accessing the Camera	.32
Web Interface - Basic Functions	. 33
Live View	34
Configuration	36

# System Requirements for Operating the Camera

To operate the IP camera via web browser, please ensure the PC is in good network connection and meets system requirements as described below.

#### **System Hardware**

CPU	i5-2430M CPU@ 2.40GHZ
RAM	6 GB or above
Display	NVIDIA GeForce 6 Series or ATI Mobility Radeon 9500
Power Supply	PoE (IEEE 802.3af Class 3)
Network	10/100BASE-T Ethernet (RJ-45 connector)

#### **System Software**

Operating System	Microsoft Windows 10 or above, MacOS Sierra or above
Browser Mozilla Firefox, Google Chrome, Apple Safari, Microsoft Edge	

# **Accessing the Camera**

#### NOTE!

This MOBOTIX MOVE camera is designed for full integration with MOBOTIX and third-party software and recording solutions using common ONVIF S/G/T/M profiles.

When integrating this camera into MOBOTIX environments (e.g. MOVE NVR, MOVE CMS, MOBOTIX HUB, MxMC, MOBOTIX CLOUD etc.) or third-party software, please use the ONVIF device search and integration method only.

The IP address of the camera can be found on the label on the camera housing.

- 1. Access the IP address of the camera with a web browser.
- 2. If you are accessing the camera's web interface for the first time, you must change the administrator password for user "ADMIN".

#### This Camera is Not Secure




#### NOTE!

The password must include at least

- 8 characters including
- 1 uppercase letter
- 1 special character


### **Web Interface - Basic Functions**

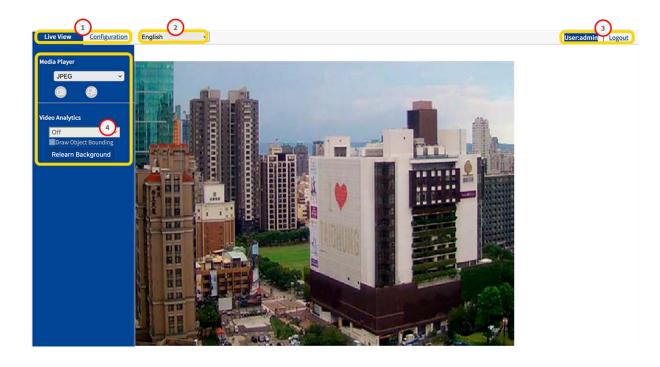

- 1. View Selection: Select between Live View and Configuration View.
- 2. **Language Menu:** Select your preferred user interface language.

- 3. **User:** Here you see the currently logged in user and you can log this user out.
- 4. **Control Panel:** The Live View contains functions for camera and image control. In the Configuration View, a navigation menu is located here.

### **Live View**

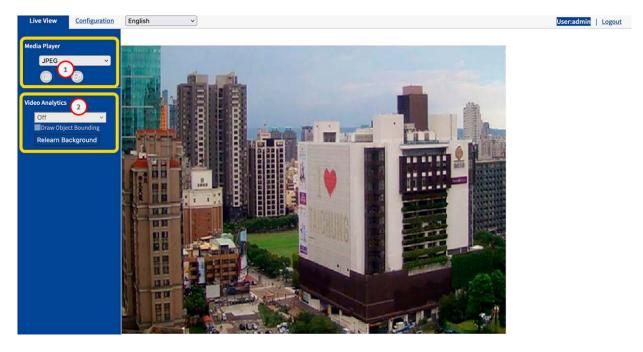

In "Live View", you can control the live image with the following functions:

- 1. Media Player
- 2. Video Analytics


### **Media Player**



The Media Player provides the following functions:

- 1. Streaming format: In the drop-down menu, select the streaming format for the live image
  - JPEG
  - H.264
- 2. **Snapshot:** Click on the camera icon to create and save a snapshot from the current live image.


### **Video Analytics**



The Video Analytics features are

- Analytics Type: When configured you can choose from Line Counting or Border Line. Also see Video Analytics, p. 84 section.
- **Draw Object Bounding:** Activate to draw a bounding box around detected objects.
- **Relearn Background:** Click to relearn the background e.g. if the scene to be analyzed has changed.

# **Configuration**

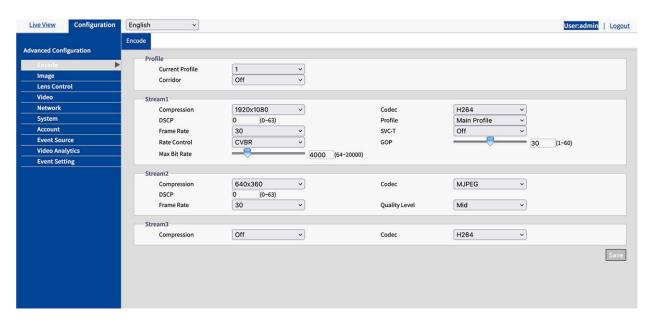


Depending on your user rights you can access the "Configuration View", where you can configure the camera regarding the following sections:

- Encode
- Image
- Lens Control
- Video
- Network
- System
- Account
- Event Source
- Video Analytics
- Event Setting


#### **Encode**

For optimum video quality for different network environments and applications, you can configure up to three different profiles, each with three streams.

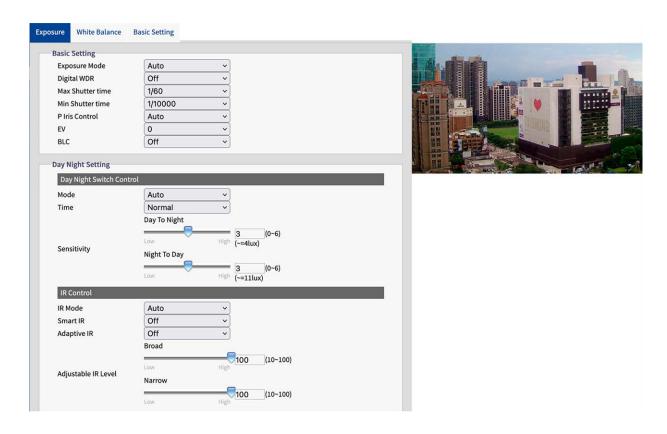

### **Profile**

You can define up to three video profiles.



- **Current Profile:** Select the profile you to be edited.
- Corridor: Activate or deactivate the corridor format. The corridor format is suitable for monitoring scenes that require a vertical image orientation, for example corridors.
  - On: The image is aligned vertically.
  - Off: Default, the Image is aligned horizontally.

# **Stream (1/2/3)**

You can define up to three video streams per profile. Each stream can be based on MJPG, H.264 or H.265.



#### **MJPG**

MJPEG (Motion JPEG) is a video codec in which each individual frame is compressed separately as a JPEG image. Videos compressed with MJPEG have a quality that is independent of the movement of the image and in which each individual image can be evaluated or saved. The MJPG format usually requires a lot of bandwidth and storage space.

- **Compression:** Select the video resolution 1920×1080, 1280×960, 1280×720, 800×600, 640×480, 640×360, 320×240.
- **DSCP:** Set a value from 0 (default) to 63. DSCP (Differentiated Services Code Point) is a is a scheme for classifying IP packets. This classification can be used by the network scheduler to prioritize IP data packets in order to ensure quality of service: The higher the value, the higher the priority.
- Frame Rate: The frame rate indicates how many images (frames) are displayed per second. You can set a frame rate between 1 and 30 frames per second (fps). The higher the frame rate, the smoother the video stream.
- Quality Level: Select a quality level of Low, Medium or High. "High" produces the best image quality (lowest compression of individual images), but results in a larger file size and requires more network bandwidth. In contrast, "Low" produces the lowest image quality with a smaller file size.

#### H.264 / H.265

MJPEG (Motion JPEG) is a video codec in which each individual frame is compressed separately as a JPEG image. Videos compressed with MJPEG have a quality that is independent of the movement of the image and in which each individual image can be evaluated or saved. The MJPG format usually requires a lot of bandwidth and storage space.

**Compression:** Select the video resolution 1920×1080, 1280×960, 1280×720, 800×600, 640×480, 640×360, 320×240.

- **DSCP:** Set a value from 0 (default) to 63. DSCP (Differentiated Services Code Point) is a is a scheme for classifying IP packets. This classification can be used by the network scheduler to prioritize IP data packets in order to ensure quality of service: The higher the value, the higher the priority.
- **Frame Rate:**The frame rate indicates how many images (frames) are displayed per second. You can set a frame rate between 1 and 30 frames per second (fps). The higher the frame rate, the smoother the video stream.

#### Rate Control:

- **VBR:** With a variable bit rate, the bit rate of a video signal is varied during compression depending on the complexity of the underlying signals, with the aim of achieving constant quality.
- **CBR:** With a constant bit rate, the bit rate of a video signal remains constant during compression, regardless of the complexity of the signal. The quality of the result can vary.
- **CVBR:** Constrained Variable Bitrate (CVBR) is a method of encoding your video with an adaptive bitrate. Essentially, more bitrate is allocated if the video image is more complex and less bitrate is used if the video image is simply structured. Note that the higher the bitrate used, the larger the file size. CVBR may reduce the file size for simply structured scenes with few contrasts.
- Quality Level: For VBR you can set a Quality Level between 1 and 10. "10" produces the best image quality but results in a larger file size and requires more network bandwidth. In contrast, "0" produces the lowest stream quality but requires less network bandwidth.
- **CBR Bit Rate / Max Bit Rate:**Bit rate is the data transfer rate of digital multimedia formats such as audio or movie files. The bit rate indicates the ratio of the amount of data that is displayed in a certain amount of time. A bit rate that is too low can have a negative effect on the video quality, whereas a bit rate that is set too high causes a higher network load.
- **Profile:** You can select a suitable profile for your application. The H.264 codec supports the Main Profile and High Profile profiles. The H.265 codec only supports the Main Profile.
  - **Baseline Profile:** Primary profile for lower-cost applications with limited hardware resources. This profile is used for video conferences and mobile applications.
  - Main Profile: This profile is intended for broadcast and more complex requirements.
  - **High Profile:** High Definition profile for broadcast and disk-storage applications. The High profile is primarily used for High Definition TV applications. The High profile is generally used for HD-DVDs and BluRay disks.

- SVC-T: Switch SVC-T On or Off (default). Due to multi-browsers support, the performance of live view will vary according to the efficiency of each browser and client device. Consequently, the "Scalable Frame Rate" is introduced to help user dynamically adjust to a desired frame rate per browser applied for smooth video display. Please refer the Live view "Scalable Frame Rate" function, The option "Full" indicates a full frame rate display in response to the setting under "Encode" page, whereas "1/2" & "1/4" mean that display frame rate will be reduced to one half and one quarter respectively. Turn "SVC-T" on before using "Scalable Frame Rate" function.
- **GOP:** Set a value from 1 to 60 (default: 30).

The Group of Pictures (GoP) is a group of consecutive frames in the image stream of a compressed digital video that are coded in dependence on one another. An MPEG stream essentially consists of I-frames and P-frames. An I-frame (intra-coded picture) is a reference picture which corresponds to a complete still picture, similar to a JPEG picture, and is independent of other picture types. A P-frame (predictive-coded picture) contains differential information from the previous I-frame.

The GoP length is defined by the distance between two I frames. A large GOP-length consumes less network bandwidth but e.g. in an unstable network is a higher risk of loosing image data.


**NOTE!** The available GOP values depend on the frame rate.

# **Image**

In this section you can specify settings for Exposure, White Balance, and Basic Settings.



## **Exposure**

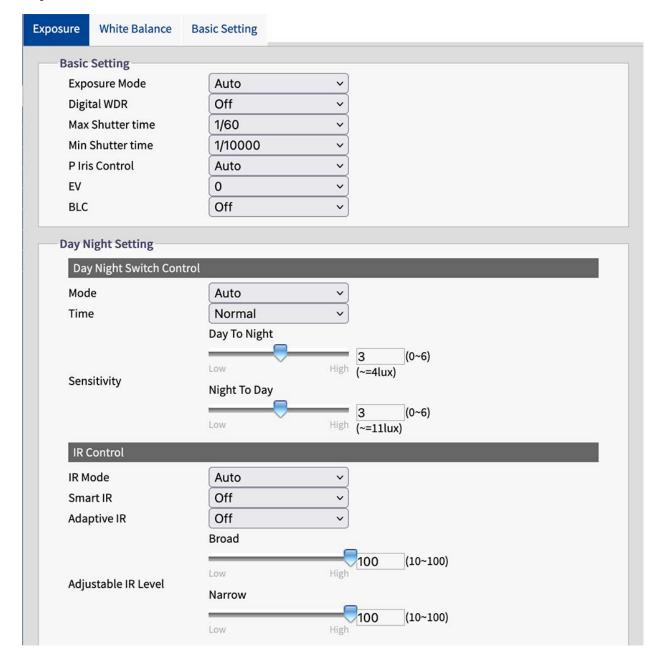

### **Exposure**

- **Exposure Mode:** Select one of the following modes:
  - Auto:Lets the camera automatically choose the proper exposure.
  - **Flickerless:**The camera overrides the shutter speed, which helps to avoid interference of fluorescent lights in some environments.
  - **Shutter Priority:** The camera stays in black and white mode when B/W is selected.
  - **Manual:** Allows to manually control both gain value and shutter speed. It is recommended for an experienced administrator to adopt this mode.
  - **True WDR:** Provides clear images even under backlight circumstance where intensity of illumination can vary excessively; namely both extreme bright and dark areas exist simultaneously in field of view. True WDR is a sensor-based technology that achieves proper exposure levels by capturing short and long exposures individually and combining them into a single frame to render a superior detail of image quality. Note that when **True WDR** is enabled, the maximum frame rate will be limited to 30 fps.

**NOTE!** Depending on the exposure modes selected above, not all of the following options are available.

- **Digital WDR:** In contrast to sensor-based True WDR, Digital WDR is based on a software algorithm that optimizes image quality by adjusting the gamma value, facilitates better quality of details within both bright and dark areas, in a way that there are crystal clear details in both extreme areas. Bright areas are not saturated and dark areas are not too murky.
- Max Shutter time: You can adjust the Day To Night and the Night To Day sensitivity. A higher value (High) means that the camera can automatically switch between day and night mode even if there is a slight change in light intensity.
- Min Shutter time: Select "Auto" (default) so that the camera switches the IR LED on or off depending on the light intensity or depending on various applications. Select "On" so that the camera activates the IR LED permanently and "Off" to switch the IR LED off.
- **Shutter speed:** Select "Auto" (default) so that the camera switches the IR LED on or off depending on the light intensity or depending on various applications. Select "On" so that the camera activates the IR LED permanently and "Off" to switch the IR LED off.
- P Iris Control: Controls the iris of the camera lens. The Auto settings automatically adjusts the iris size to the amount of light that is available. When selecting Manual, you can adjust the iris size manually using the P Iris Level slider. Use higher values if you want to achieve higher depth of field in the images.
- **EV:** The *Exposure Value* allows you to adjust the brightness of a scene. Positive numbers render a brighter image, while negative numbers render a darker image.

- **BLC:**Backlight Compensation reduces the effect of a backlit scene (e.g. sun shining through a window). As a result, the auto iris lens quickly closes, resulting in an underexposed image. If this happens, select the area you want to observe; the remaining image area may get overexposed.
  - Off: Uses the entire image for exposure control.
  - Upper: Uses the upper two thirds of the image for exposure control.
- **Lower:** Uses the lower two thirds of the image for exposure control.
- Center 1/3: Uses one third of the image at the center for exposure control.
- Center 1/6: Uses one sixth of the image at the center for exposure control.
- Left: Uses the left half of the image for exposure control.
- Right: Uses the right half of the image for exposure control.
- **Frequency:** Select the utility frequency (50/60 Hz) to prevent fluorescent lights from creating strange image effects. In Europe, the utility frequency (aka *power line* or *mains* frequency) is typically 50 Hz, in the Americas 60 Hz.
- Gain: Use the slider to adjust the sensor gain.


### **Day Night Setting**

### **Day Night Switch Control**

Mode: Select one of the following modes:

- Auto: Lets the camera automatically switch between color mode and day/night mode, depending on the intensity of the lighting.
- **Color:** The camera is forced to stay in Color mode permanently.
- **B/W:** The camera stays in black and white mode when B/W is selected.

**NOTE!** In *Manual* exposure mode only **Color** and **B/W** are available.



Depending on the selected mode, the following settings are available:

■ **Time:** Delay time for switching between day and night mode. Fast means that the camera switches constantly and almost without delay. Slow means that the camera has a longer buffer time before switching between day and night mode.

**NOTE! Time** is not available in *Manual* exposure mode.

Sensitivity: You can set the Day To Night and the Night To Day sensitivity. The sensitivity of the day/night switching mechanism. A higher value (High) means that the camera can automatically switch between day and night mode even if there is a slight change in light intensity.

#### **IR Control**

- IR Mode: Select "Auto" (default) so that the camera switches the IR LED on or off depending on the light intensity or depending on various applications. Select "On" so that the camera activates the IR LED permanently and "Off" to switch the IR LED off.
- **Smart IR:** Activate Smart IR to protect nearby objects from overexposure in low light conditions. This dynamically adjusts the shutter speed and sensor gain. In addition, digital WDR is automatically activated to preserve details in dark areas.
- **Adaptive IR:**With adaptive infrared (IR) technology, the power of the IR LED is dynamically adjusted to the changing light at night to avoid oversaturation in the scene.
- Adjustable IR Level: When Adptive IR is set to "OFF" you can drag the sliders to set the IR intensity manually.

### **White Balance**

The white balance is used to adjust the image material of a camera to the color temperature of the light at the shooting location.




## **Basic Settings**

- **Mode:** Select one of these Modes:
  - ATW: ATW: "Auto Tracing White Balance" automatically controls the color temperature range.
  - Auto: This mode continuously adjusts the color balance of the camera to any change in color temperature.
  - **Manual:** In this mode, you can manually adjust teh White Balance by adjusting red and blue color gain.
    - **R Gain:** Drag the slider to adjust the gain of red in the image.
    - **B Gain:** Drag the slider to adjust the gain of blue in the image.
    - One Push: Click on this button so that the camera automatically adjusts to the correct gain values.

# **Basic Settings**

In this section you can adjust the settings for image quality, color and image rotation.

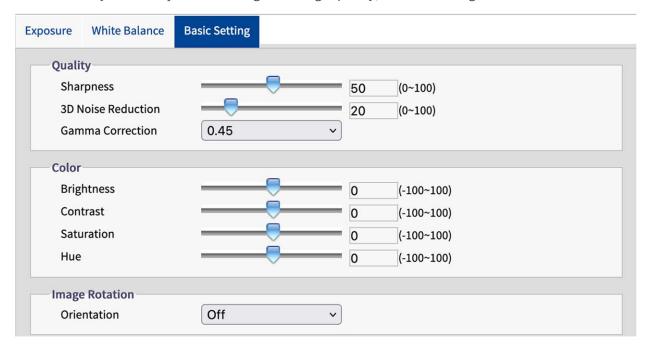

### Quality

- **Sharpness:** Increase the sharpness value to sharpen the edges and details of the image. The value range is between 0 and 100.
- 3D Noise Reduction: You can reduce the image noise with this setting. The higher the value, the stronger the noise reduction effect. The value range is between 0 and 100.

■ **Gamma Correction:** Gamma correction may be required to correctly display the gray values of the camera image on a monitor. Select between 0.45 (standard) and 1.

#### Color


- **Brightness:** If you select a higher value, the image will be brighter. The value range is between -100 and 100.
- **Contrast:** If you select a higher value, the image will be more contrasted. The value range is between -100 and 100.
- **Saturation:** Reducing the color saturation brings the image closer to a grayscale image (monochrome). The selection of 100 offers the highest color saturation. The value range is between -100 and 100.
- **Hue:** The hue value specifies the tone of the color. The value range is between -100 and 100.

### **Image Rotation**


- **Orientation:** You can rotate the image according to your requirements.
- Off: Default setting. The image is displayed as the camera sees it.
- Flip: The image is mirrored around the horizontal axis.
- Mirror: The image is mirrored around the vertical axis.
- **Both:** The image is mirrored around the vertical and the horizontal axis.

## Video

In this section you can define Privacy and enhanced video codec settings.

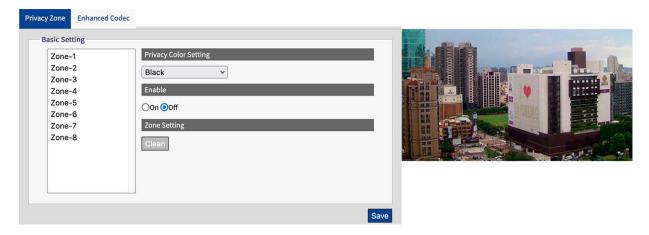

## **Privacy Zone**



A privacy zone masks a defined image area to protect privacy. It applies to all streams, the recording and the live view and has no influence on analysis functions such as motion detection. You can define up to 8 different privacy zones. After setting up a privacy zone, a frame is displayed in the live view, the color, size and position of which can be adjusted.


### **Basic Settings**

This is how you set up a Privacy Zone:

- 1. Select one of the 8 zones.
- 2. Draw a rectangular Privacy Zone in the live image using the mouse.
- 3. Set the Zone options:
  - **Privacy Zone Color Options:** Select the color with which the zone is masked.
  - **Enable:** Switch the selected zone On or Off (default.)
  - **Zone Settings:** Click Clear to delete the settings of the selected zone.

### **Enhanced Codec**

Enhanced Codec is a method to ensure lower bit rates when selecting H.264/H.265.

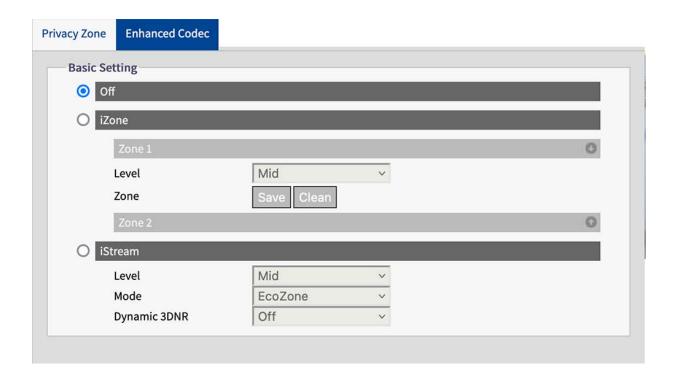

## **Basic Settings**

- Off: The Enhanced Codec is deactivated.
- **iZone:** iZone is a function to allow different compression levels on different image areas while maintaining the target bit rate.

By activating this function, you can define a user-defined zone within the image that is compressed less. Image areas outside the zone are compressed more.

First, draw a rectangular Zone in the live image using the mouse, then make the following settings:

- **Level:** A high level means higher image quality and lower compression in the zone.
- **Zone:** Click Save to apply the settings. Click to delete the iZone.


■ **iStream:** This technology helps to efficiently save network bandwidth while maintaining the best possible image quality for critical image details. By activating this function, you can define a user-defined zone within the image that is compressed less. Image areas outside the zone are compressed more.

**NOTE!** If the "iStream" function is activated, further bit rate control functions are not available due to the dynamic bit rate management (see H.264 / H.265, p. 38).

First, draw a rectangular Zone in the live image using the mouse, then make the following settings:


- **Level:** A high level means higher image quality and lower compression in the zone.
- Mode: sad
- **EcoZone:** Unlike iZone, EcoZone can identify dynamic motion within a scene faster and preserve its details in clear quality, while subjecting the remaining areas, such as static backgrounds, to a higher compression level, economically reducing bandwidth for less important things and preserving the dynamic motion details for further forensic purposes.
- **EcoZone + EcoFrame:** This option increases the overall efficiency of the EcoZone mode.
- Dynamic 3DNR: While 3DRN allows user to adjust noise reduction level manually, dynamic 3DRN dynamically and automatically adjusts to the best noise reduction level according to the amount of noise on the image. Lux level change is what triggers changes in noise reduction level for dynamic 3DNR. Higher lux activates smaller noise reduction level.

**NOTE!** Be aware that using Dynamic 3DNR in a scene that contains motion may result in blurred image.

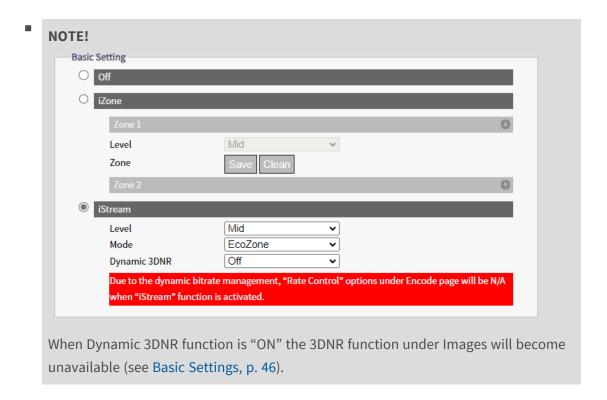


## **Network**


In this section you can adjust network specific settings.

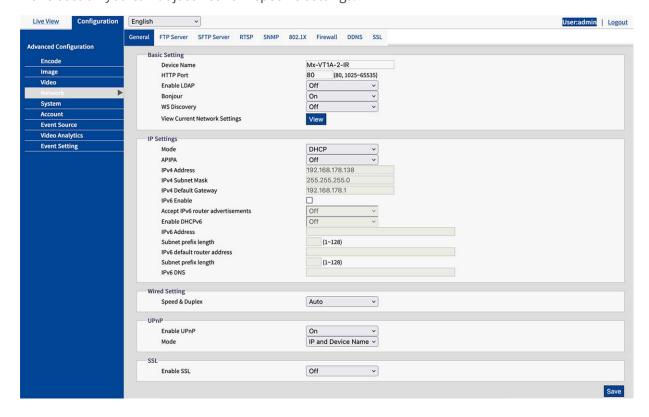

#### General

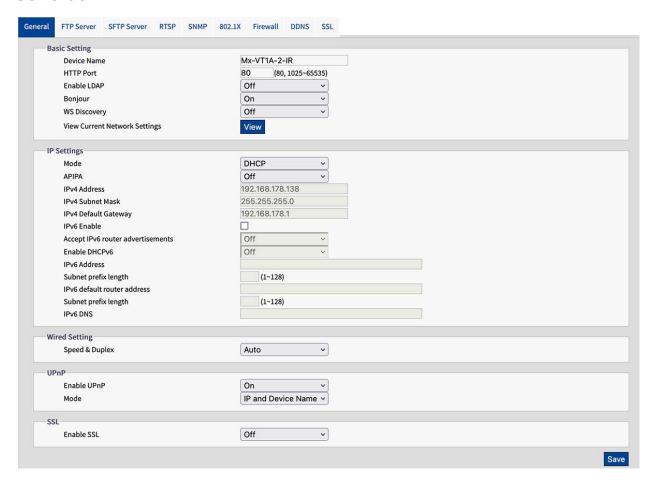

## **Basic Settings**




- **Device Name:** The default name corresponds to the device type. You can change it if required.
- HTTP Port: In general, the port does not need to be changed. If in doubt, please contact your administrator.
- Enable LDAP: LDAP (Lightweight Directory Access Protocol) is a network protocol for querying and changing information from distributed directory services.
   LDAP is an industry standard for authentication, authorization, address and user directories.
   Most software products that have to deal with user data and are relevant on the market support LDAP.

- Please ask your administrator before enabling LDAP.
- **Bonjour:**Bonjour, also known as Zero-Configuration Networking, enables the automatic detection of devices and services in a local network using industry-standard IP protocols. Bonjour is also used in Apple Safari, iTunes, AirPrint and some Adobe applications as well as network-enabled hardware. Please ask your administrator before activating Bonjour.
- WS Discovery: WS-Discovery (Web Services Dynamic Discovery) is a technical specification that defines a multicast discovery protocol for finding services in a local network. It works over TCP and UDP port 3702 and uses the IP multicast address 239.255.255.250 or ff02::c. It can be used to search for ONVIF-enabled devices in a network. Please ask your administrator before activating WS-Discovery.
- View Current Network Settings: Click to display your current network related settings.

eth0 Link encap:Ethernet HWaddr 00:03:C5:C3:00:14 inet addr:192.168.178.138 Bcast:192.168.178.255 Mask:255.255.255.0	INGIMO	rk Interface Information	
X		inet addr:192.168.178.138 Bcast:192.168.178.255	4

### **IP Settings**

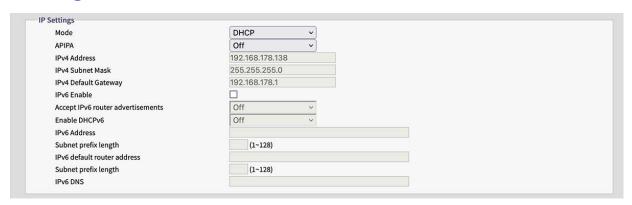

- **Mode:** Select one of the following network modes:
  - **Manual:** Enter a fixed IP address and the corresponding settings.
    - IPv4 Address: Enter a fixed IPv4 address.
    - **IPv4 Subnet Mask:** Enter the subnet mask according to your network configuration (usually 255.255.255.0).
    - **IPv4 Default Gateway:** Enter the gateways IP address according to your network configuration (usually the routers default IP address).
    - **Primary DNS:** Enter the primary DNS (Domain Name System Server) address according to your network configuration (usually the routers default IP address).
    - Secondary DNS: Enter the secondary DNS address according to your network configuration (usually the routers default IP address).
  - **PPPoE:** It is a point-to-point protocol that provides authentication, encryption and compression. It authenticates the user primarily with a predefined user name and password.
  - **DHCP:**The camera will automatically obtain an available dynamic IP address from the DHCP server each time it connects to the LAN.
    - **APIPA:**APIPA (Automatic Private IP Addressing) helps to reserve a specific address block for link-local addressing if DHCP is not available in the connected Internet environment.
- IPv6 Enable: Enable/ Disable IPv6 protocol.
  - Accept IPv6 router advertisements: Check to activate RA (Router Advertisement). A router advertisement message is regularly issued by a router or in response to a router solicitation message from a host. These router advertisements inform a client whether it receives an IP address from a DHCPv6 server or assigns one itself.
    - **Enable DHCPv6:** If this option is activated, the camera automatically obtains an available dynamic IP address under the IPv6 protocol from the DHCP server each time it connects to the LAN.
      - IPv6 Address: Enter a fixed IPv6 address.
      - **Subnet prefix length:** When DHCPv6 is Off, set prefix length for subnet. The range is between 1 and 128.
      - **IPv6 default router address:** Enter the routers IPv6 address according to your network configuration.
      - **Subnet prefix length:** When DHCPv6 is Off, set prefix length for subnet. The range is between 1 and 128.
      - **IPv6 DNS:** Enter the primary DNS (Domain Name System Server) address according to your network configuration (usually the routers default IPv6 address).

### **Wired Settings**



■ **Speed & Duplex:** Select according to your network environment. Due to possible data collisions, half-duplex can only send or receive data simultaneously, while full-duplex is able to receive and send data simultaneously at full line speed without collisions occurring. The following applies to the selected data rate (Mbit/s): The higher the rate, the faster data can be transmitted. With the "Auto" setting, the camera automatically decides which mode to use.

#### **UPnP**



- **Enable UPnP:** If the UPnP function (Universal Plug & Play) is activated, the camera can be recognized by UPnP-capable devices in the network.
  - IP and Device Name: The device name and IP address will be visible for other network devices.
  - **Device Name:** Only device name will be visible.
  - User Input: You can provide a customized name for the camera to be visible for other network devices.

#### **SSL**



■ **SSL:** Enable the use of SSL (Secure Sockets Layer) to set up secure communication for both HTTP and HTTPS

**NOTE!** "HTTPS only" only works within an HTTPS connection.

#### **FTP Server**

This section describes how to use the camera as an FTP server.

FTP (File Transfer Protocol) is a standard Internet protocol that enables the transfer of files between two computers via a TCP-based network.

In contrast to SFTP (see SFTP Server, p. 56), communication with FTP is unencrypted.

The camera can function both as an FTP server and as an FTP client.

As long as the FTP server is enabled, users can use an FTP client to access the files (video/image recordings) stored on the camera's SD card.

The login details correspond to the user account. A maximum of 30 simultaneous connections to the FTP server is possible.

**EXAMPLE:** To access the data stored on the SD card via FTP using a web browser, enter e.g. ftp://<loopin ID>:<password>@<IP address> (e.g. ftp://admin:1234@192.168.0.30.) in the browser search field.



## **Basic Settings**

- **Enable:** Enable or disable the FTP server.
- **Port:** In general, the port (default: 21) does not need to be changed. If in doubt, please contact your administrator.

#### **SFTP Server**

This section describes how to use the camera as an SFTP server.

SFTP (Secure File Transfer Protocol) is an Internet protocol that enables the transfer of files between two computers via a TCP-based network. In contrast to FTP (see FTP Server, p. 55), communication with SFTP is encrypted. The camera can act both as an SFTP server and as an SFTP client.

As long as the SFTP server is activated, users can use an SFTP client to access the files (video/image recordings) stored on the camera's SD card.

The login data corresponds to the user account. A maximum of 30 simultaneous connections to the SFTP server are possible.

**EXAMPLE:** To access the data stored on the SD card via FTP using a web browser, enter e.g. ftp://<loopin ID>:<password>@<IP address> (e.g. ftp://admin:1234@192.168.0.30.) in the browser search field.



## **Basic Settings**

- **Enable:** Enable or disable the SFTP server.
- **Port:** In general, the port (default: 2221) does not need to be changed. If in doubt, please contact your administrator.

#### **RTSP**

This section describes how to configure an RTSP connection.

RTSP (Realtime Streaming Protocol) is a standard protocol for connecting a client to set up and control data streams over the Internet.

If you want to allow third-party devices or software to access video/audio streams from the IP camera over the network, you need to configure the RTSP ports.


The main difference between unicast and multicast is the way in which the client and server communicate packets with each other.

A unicast transmission is a direct one-to-one communication between the camera and the client application. In a multicast system, on the other hand, this is referred to as one-to-many communication.

Unicast requires more network bandwidth than multicast, but is easier to configure and generally more stable due to its simple structure.

Multicast, on the other hand, requires less bandwidth and resources and is more practical for transmission to multiple devices, provided that all relevant peripheral devices such as switches or routers support the multicast protocol.

Different IP addresses for video, audio and metadata can be configured for each RTSP session. If codec related information is changed, the RTSP server will be restarted.

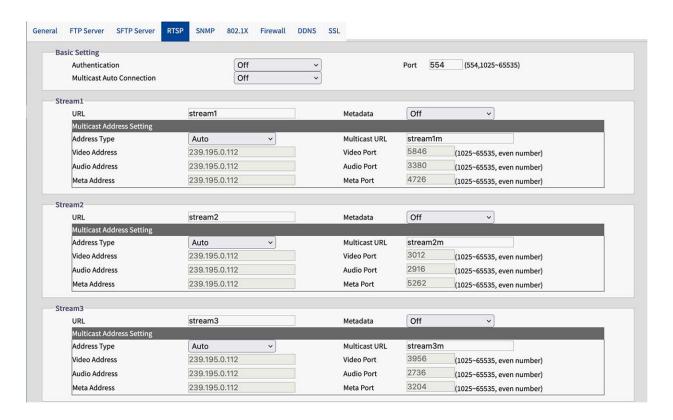

## **Basic Settings**

■ **Authentication:** Set the authentication to "On" to secure the RTSP connection process.

**NOTE!** If authentication is enabled, the user name and password must be entered on the client.

- Port:Enter the RTSP Port
- Multicast Auto Connection: If you set Auto Connect to "ON", the automatic connection via multicast mode is activated.

#### **Stream**

You can configure up to 3 RTSP streams. Each stream can be configured individually.

URL: Enter an individual name for the unicast stream. The name is part of the URL via which the stream can be accessed.

**EXAMPLE:** Suppose the name of the stream is "stream1", the URL could look like this: rtsp://192.168.0.30:1554/stream1

- Metadata: Set to "ON" if meta data should be transmitted with the stream.
- Multicast Auto Connection: If you set Auto Connect to "ON", the automatic connection via multicast mode is activated.

 Multicast URL: Enter an individual name for the multicast stream. The name is part of the URL via which the stream can be accessed.

**EXAMPLE:** Suppose the name of the multicast stream is "stream1m", the URL could look like this:


rtsp://192.168.0.30:1554/stream1m

- Address Type: Select "Manual" to manually set the IP addresses and ports for retrieving video, audio and meta settings. The "Auto" option (default) offers the default IP address and the default ports of the camera.
- Video Adress: If Adress Type is set to "Manual" you can edit the IP-Adress for streaming video data.
- Audio Adress: If Adress Type is set to "Manual" you can edit the IP-Adress for streaming audio data.
- Metadata Adress: If Adress Type is set to "Manual" you can edit the IP-Adress for streaming meta data.
- Video Port: If Adress Type is set to "Manual" you can edit the port for streaming video data.
- Audio Port: If Adress Type is set to "Manual" you can edit the port for streaming audio data.
- Metadata Port: If Adress Type is set to "Manual" you can edit the port for streaming meta data.


#### **SNMP**

It is possible to send SNMP v1, v2 and v3 traps

SNMP (Simple Network Management Protocol) is a widely used protocol for monitoring network devices. Messages are sent to a management host or a trap receiver.

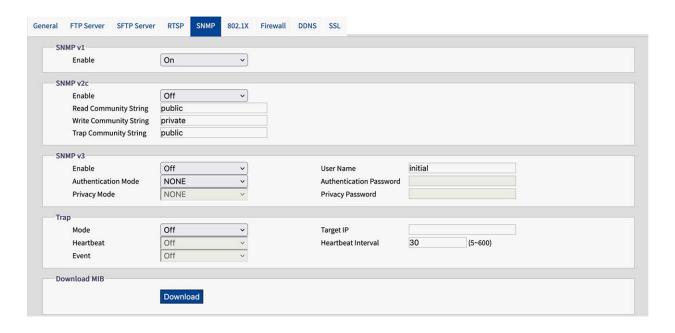


#### SNMP v1



**Enable:** Select "On" or "Off" (default) to enable or disable.

#### SNMP v2c



■ Enable: Select "On" or "Off" (default) to enable or disable.

The "SNMP community string" is like a user ID or password that allows access to a router's or other device's statistics.

**NOTE!** The read-only community string must be different to the read-write community string.

- Read Community String: Enter a write community string.
- Write Community String: Enter a write community string.
- **Trap Community String:** Enter a community string for SNMP traps.


#### SNMP v3



SNMP V3 provides more security features than SNMP v1/SNMP v2.

- **Enable:** Select "On" or "Off" (default) to enable or disable.
  - **User Name:** Enter the user name for SNMP v3.
  - **Authentication Mode:** Available modes are: None (default), MD5, SHA.
    - Authentication Password: If a Authentication Mode is selected enter a password for the user authentication.
  - Privacy Mode: Select a Privacy Mode to encrypt the data Privacy Password. Available modes are AES and DES.
    - Privacy Password: If a Privacy Mode is selected enter a password for data privacy.

#### **Trap**




You can connect a SNMP Trap receiver here.

- Mode: Select the Version of the SNMP protocol to be used.
- Target IP:Enter the SNPM clients IP-Adress.
- **Heartbeat:** Set to "On" if a periodic heartbeat trap should be sent.
  - **Heartbeat Interval:** Enter the interval (in seconds) for the periodic heartbeat.

**Event:** Set to "On" if traps should be sent on camera events.


#### **Download MIB**



■ **DOWNLOAD:** Click to download details of the MIB (Management Information Base) as a.MY file.

**NOTE!** MIBs describe the structure of the management data of a device subsystem that uses a hierarchical name space with object identifiers (OID). Each OID identifies a variable that can be read or set via SNMP.

#### 802.1X




IEEE 802.1X is a standard for authentication in computer networks and defines the encapsulation of the Extensible Authentication Protocol (EAP) via IEEE 802.

### **Basic Settings**

- **Protocol:** Select the EAP protocol type and enter the required data to complete the setup.
  - **EAP-MD5:** This is the only EAP method based on IETF standards and offers the lowest security.
    - User Name: Enter The User Name.
    - Password: Enter the Password.
  - **EAP-TTLS:** EAP-TTLS (Tunneled Transport Layer Security) is widely supported among wireless vendors.
    - Inner Authentication: The internal authentication mode can support CHAP, EAP-MSCHAPV2, MD5, MSCHAP, MSCHAPV2 and PA.
    - User Name: Enter The User Name.
    - **Password:** Enter the Password.
    - **Anonymous ID:** Enter the anonymous ID.
    - **CA Certificate:** Select a certificate issued by a certificate authority (CA).
  - **EAP-PEAP:** The Protected Extensible Authentication Protocol (PEAP) was developed jointly by Cisco Systems, Microsoft and RSA Security and offers unique security.
    - **User Name:** Enter The User Name.
    - **Password:** Enter the Password.

### **Firewall**

You can manually define several IP addresses to be allowed or denied to access camera

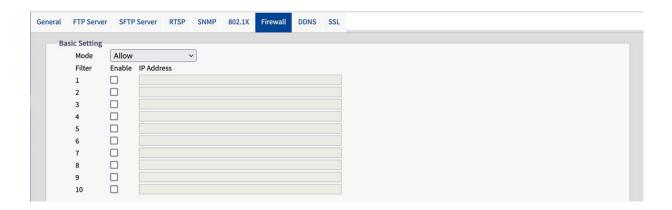

## **Basic Settings**

- **Mode:** Select a firewall mode:
  - Off This is the default setting. No specific IP adresses are allowed or denied.
  - **Allow:** You can define IP addresses that are explicitly allowed to access the camera.
  - **Deny:** You can define IP addresses that are explicitly not allowed to access the camera.

#### **DDNS**

Dynamic Domain Name Server (DDNS) is a system that can update DSN records automatically and in real time without the need for further manual editing, resulting in faster and smoother web address routing.




### **Basic Settings**

- **Enable:** Select "On" to activate the configured DNS Service. There are 4 types of DDNS available:
  - **DynDNS** A leading DDNS provider with fee-based offers.
  - **No-IP:** A DDNS provider with free offers. Registration required.
  - **Two-DNS:** A DDNS provider with free offers. Registration required.
  - FreeDNS: A DDNS provider with free offers. Registration required.
- **Hostname:** Enter the host name for DDNS.
- User Name: Enter a user name for accessing the DDNS.
- **Password:** Enter the password for accessing the DDNS.

## **SSL**

Secure Sockets Layer (SSL) is the standard security technology for encryption. It enables the secure transmission of sensitive information such as login data.

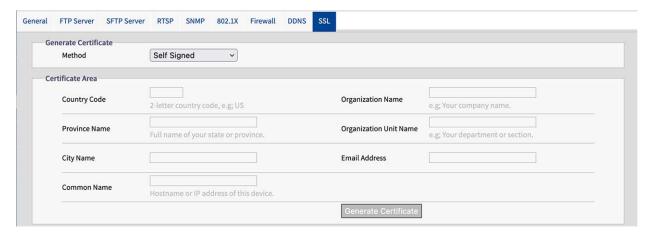


#### **Generate Certificate**

- Method: Select "On" to activate the configured DNS Service. There are 4 types of DDNS available:
  - None: No SSL certificate is used(default).
  - **Self-Signed:** A self-signed certificate is a private, proprietary key that has no connection to a person or organization that performs an authorized certificate signing procedure. For a self-signed certificate, the user can create a CSR (Certificate Signing Request) by filling in the following information.
    - **Country Code:** Enter two-letter country code.
    - Organization Name: Enter e.g. your company name.
    - **Province Name:** Full name of your state or province.
    - **Organization Unit Name:** Enter e.g. your department or section.
    - **City Name:** Enter your city name.
    - Email Address: Enter your contact email address.
    - Common Name: Enter the Hostname or IP address of this device.
    - Generate Certificate: Click to generate the self signed SSL certificate and show the certificate information.
  - **Request:** A DDNS provider with free offers. Registration required.
    - **Country Code:** Enter two-letter country code.
    - Organization Name: Enter e.g. your company name.
    - **Province Name:** Full name of your state or province.
    - **Organization Unit Name:** Enter e.g. your department or section.
    - **City Name:** Enter your city name.
    - Email Address: Enter your contact email address.
    - **Common Name:** Enter the Hostname or IP address of this device.
  - Upload Certificate: A DDNS provider with free offers. Registration required.
    - Upload Certificate: Click to load the certificate file that you received from the DDNS provider onto the camera.
    - **CA Certificate:** Click to.load the CA (Certificate Authority), which is issued by authorized person or organization onto the camera.

#### **Certificate Information**

The certificate information is displayed when a certificate has been generated or uploaded.




#### ■ Delete Certificate:


Click to delete a certificate.

# **System**

In this section you can adjust system specific settings.

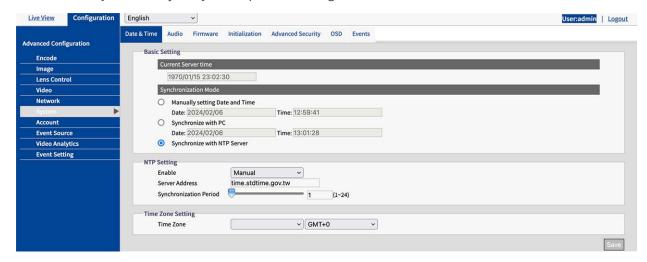

### **Date & Time**

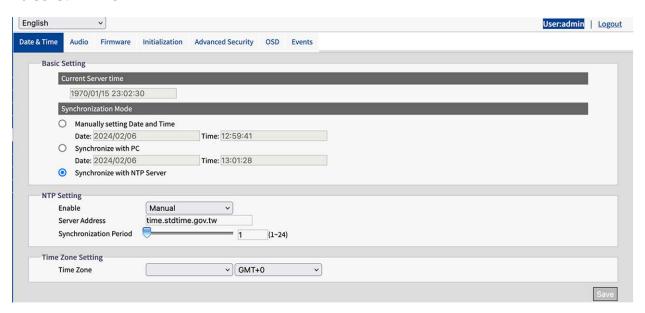

## **Basic Settings**

- **Current Server Time:** The current date/time is displayed here
- Synchronization Mode:
  - Manually setting Date and Time: Set the current date and time manually.
  - **Synchronize with PC:** Select this option to synchronize date and time of the camera with PC time.
  - **Synchronize with NTP Server:** Select this option to synchronize date and time of the camera with date and time of the assigned NTP server.

### **NTP Settings**

- Enable:
- Manual: Set the time server address manually.
  - **From DHCP Server:**Enter the IP Address of the DHCP server which provides the time via NTP.
  - **Synchronize with NTP Server:** Select this option to synchronize date and time of the camera with date and time of the assigned NTP server.
  - **Synchronization Period:** Enter a time interval at which the camera should synchronize with the time server.

### **Time Zone Setting**

**Time Zone:** Select the time zone to which you want to assign the camera.

### **Audio**

The camera is equipped with a built-in microphone for audio input.



### **Audio In Setting**

- **Source:** Select the internal microphone.
- **Enable:** Select "On" (default). to activate the microphone.

- **Encoding:** Select the audio codec according to your needs:
  - **G.711 a-law:** G.711a (a-law) is primarily used in Europe.
  - **G.711 μ-law:** this codec is primarily used in the USA.
- **Level:** Low, Mid and High, are selectable levels for audio input.

#### **Firmware**



## **System Information**

This section shows detailed information about the installed camera firmware.

## **Firmware Upload**

You can update the system firmware manually.

During the firmware upgrade, the camera will be unavailable for about 3 minutes.

**CAUTION!** Never disconnect the power supply or LAN cable during the upgrade process.

• Click "Choose File" to select a corresponding firmware file, the click "Upgrade" to continue.

### **Initialization**



### **System Frequency**

 Select between 50Hz and 60Hz (default). Once set to the correct frequency, Flickering by fluorescent light can be reduced.

## **Import Setting**

You can import camera settings.

Click on "Choose File" to select a to select a file with previously exported settings then click on "Import".


## **Export Setting**

• Click on "Export" to download configuration settings to your local computer.

# **Configuration Setting**

- **Reboot:** Click to reboot the camera
- Software Factory Default: Click to reset all configuration back to factory defaults excluding network settings.
- Hardware Factory Default: Click to reset it to reset all settings to factory defaults.

# **Advanced Security**

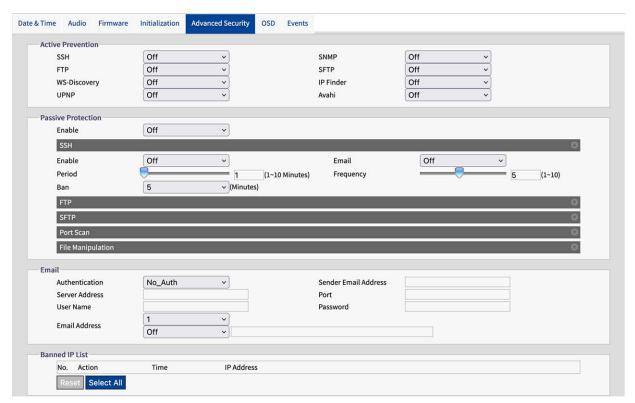

#### **Active Prevention**

When switched to "ON" the system will disable the SSH, FTP, WS-Discovery, UPNP, SNMP, SFTP, IP Finder, Avahi connection port.

- **Reboot:** Click to reboot the camera
- Software Factory Default: Click to reset all configuration back to factory defaults excluding network settings.
- Hardware Factory Default: Click to reset it to reset all settings to factory defaults.

#### **Passive Protection**

You can manually set the time period, frequency and system actions when incorrect login data is entered.

#### **Email**


You can configure email addresses to be notified of suspicious actions.

#### **Banned IP List**

You can manage IP addresses banned by the system.

### **OSD**

In this area, you can activate the OSD (On Screen Display) settings. You can configure 3 areas in which information can be displayed above the camera image, such as the date, any text or event data

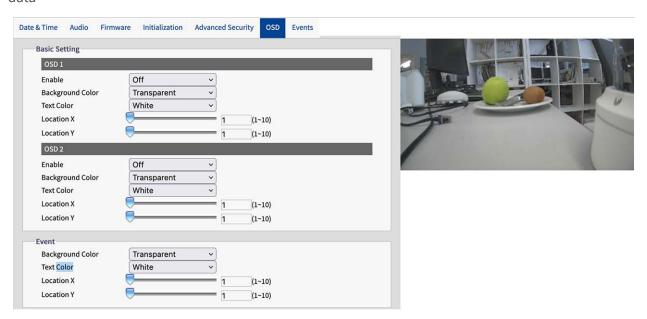

## **Basic Setting**

You can configure two areas (OSD 1, OSD 2) to display additional information on the camera image.

- **Enable:**Select, which information is to be displayed
- **Background Color:** Select the background color for the OSD.
- **Text Color:** Select the text color for the OSD.
- **Location X, Y:** Drag the sliders to set the position of the OSD.


#### **Event**

You can configure an OSD to display event information on the camera image.

- **Background Color:** Select the background color for the OSD.
- **Text Color:** Select the text color for the OSD.
- **Location X, Y:** Drag the sliders to set the position of the OSD.

#### **Events**

The camera detects a variety of events such as motion, tampering, network loss, alarm. In this area, you can search for specific event types and filter them specifically.

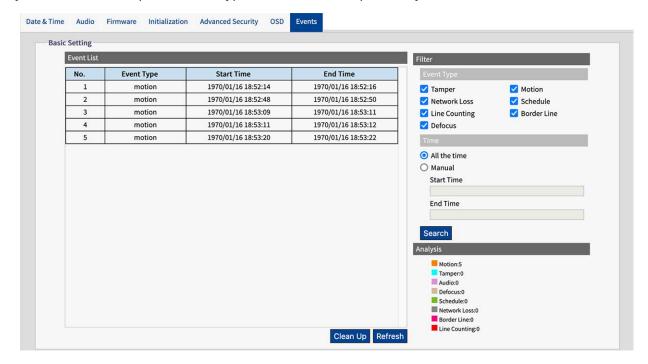

#### **Event List**

The Event List shows all events according to the set filter or time range.


- Clean Up: Click to delete all events.
- **Refresh:** Click to load all events according to the set filter or time.

#### **Filter**

- **Event Type:** Select the events to be displayed in the Event List
- **Time:** Specify the time range from which the events are to be displayed in the Event List.
- Analysis: This area shows the number of times the specific event types occurred according to the set filter or time range.


## **Account**

In this section you can manage user accounts.



# **Account Management**

Up to 10 users with different roles can be added to the camera.

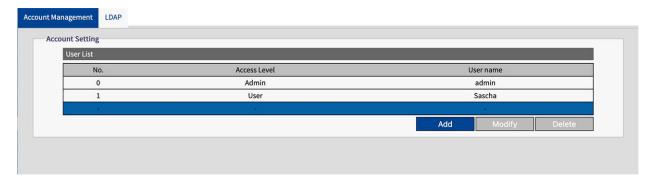

Add: Click to add a user.

Account Setting			
Access Level	OAdmin Operator Ouser		
User Name	Mr X		
Password	•••••		
		Save	Cancel

• Account Setting: Specify the Access Level, User Name and Password.

**NOTE!** The password must be at least 10 characters long and contain 1 capital letter, 1 special character and alphanumeric characters.


The Access Levels are:

- Admin: The "Admin" level has the highest access rights to the camera and can fully manage both the live view and all configuration settings.
- **Operator:** An "Operator" can access the camera to use the live view, storage and remote control of the lens.
- User: The "User" level is the lowest level and can only access the camera to use the live view.

#### **LDAP**

LDAP (Lightweight Directory Access Protocol) is a network protocol for querying and changing information from distributed directory services.

LDAP is an industry standard for authentication, authorization, address and user directories. Most software products that have to deal with user data and are relevant on the market support LDAP.

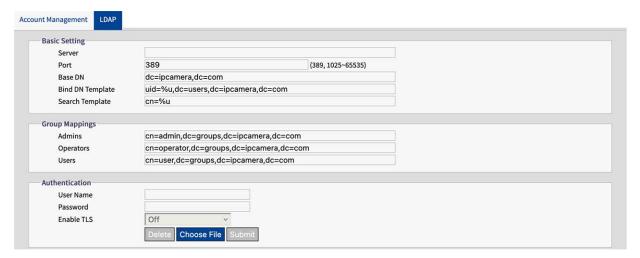

- **Server:** Enter a LDAP Server Address.
- **Port** Enter the Port for the LDAP Server. It is recommended to use the default port number 389. If it is necessary to change the port number, please contact your system administrator.
- **Base DN:** The strings for Base DN (Distinguish Name) are updated by the LDAP server to be accessed.
- **Bind DN Template:** The strings for Bind DN Template (sublevel of Base DN) are updated by the LDAP server to be accessed.
- Search Template: The strings for Search Template (are updated by the LDAP server to be accessed.

### **Group Mappings**

- Admins: refer to the rights of the LDAP administrator and has the highest access rights to the camera and can fully manage both the live view and all configuration settings.
- **Operators** refer to the rights of the LDAP operator and can access the camera to use the live view, storage and remote control of the lens.
- Users: refer to the rights of the LDAP user and can only access the camera to use the live view.


#### **Authentication**

- **User Name:** Enter a user name for authentication at the LDAP service.
- Password: Enter the password corresponding to the user name for authentication at the LDAP service.
- TLS: You can select and submit certification file for authentication at the LDAP service.


### **Event Source**

The following event sources are available: Audio, Defocus, Motion, Network, Schedule, Tamper.

The configuration options of the event sources essentially consist of the event-specific options, the event handlers and the activation schedule. The following table provides an overview of the event source configurations and their dependencies

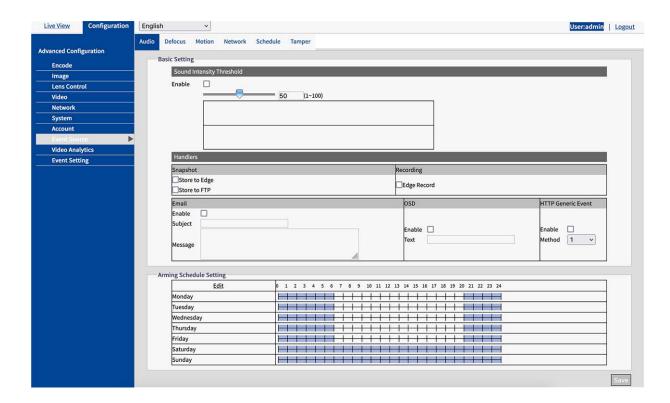

### **Audio**

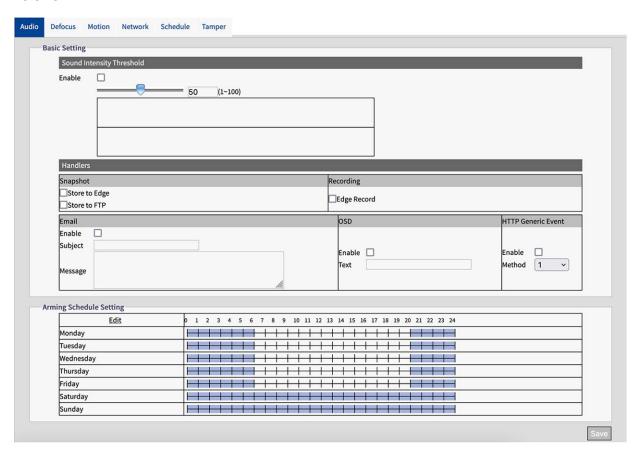


- **Enable:** Check to activate the audio event handling.
- **Sound Intensity Threshold:** Drag the slider to set the sensitivity.
- Handlers:
  - **Snapshot:** If an event occurs, the camera will store a snapshot image.
    - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
    - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
  - **Recording:** If an event occurs, the camera will record a video sequence.
    - **Store to Edge:** Check to store the event video to the cameras SD-card.
  - **Email:** If an event occurs, an email message can be sent to the configured mail server.
    - **Enable:** Check to sent an email when an event occurs.
    - **Subject:** Enter the email subject.
    - Message: Enter the email message.
- OSD: If an event occurs, an OSD message can be displayed on the camera image.
  - **Enable:** Check to display a message on the image when an event occurs.
  - **Text:** Enter the message text.
  - HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
    - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
    - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Defocus**

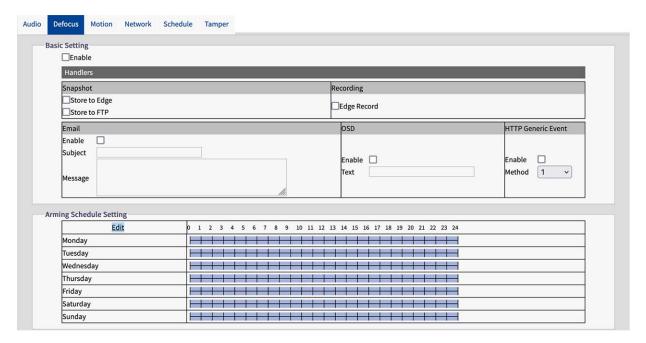


- **Enable:** Check to activate the Defocus event handling.
- Handlers:
  - **Snapshot:** If an event occurs, the camera will store a snapshot image.
    - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
    - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
  - **Recording:** If an event occurs, the camera will record a video sequence.
    - **Store to Edge:** Check to store the event video to the cameras SD-card.
  - **Email:** If an event occurs, an email message can be sent to the configured mail server.
    - **Enable:** Check to sent an email when an event occurs.
    - **Subject:** Enter the email subject.
    - Message: Enter the email message.
  - **OSD:** If an event occurs, an OSD message can be displayed on the camera image.
    - **Enable:** Check to display a message on the image when an event occurs.
    - **Text:** Enter the message text.
  - HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
    - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
    - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Motion**

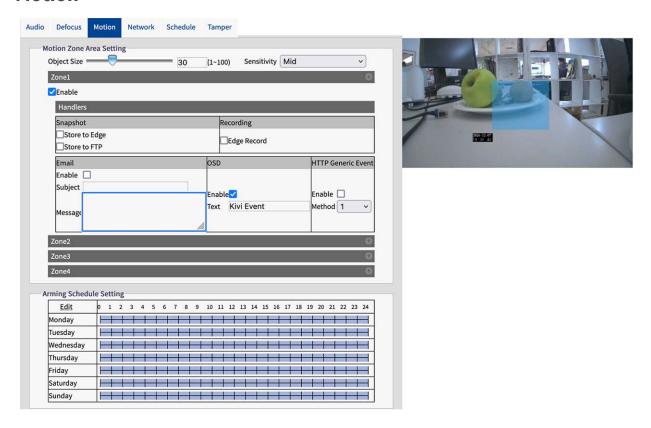

### **Motion Zone Area Setting**

You can customize up to four different zones for motion detection in the camera image.

- **Object Size:** Set the size of the object which should trigger a motion detection event. The lower the value, the smaller the object that is to trigger an event
- **Sensitivity:** Specify the sensitivity for motion detection. High means that the camera will trigger even with slight movements or changes in light.
- **Enable:** Check to activate the Motion Detection event handling per zone.


#### Handlers:

- **Snapshot:** If an event occurs, the camera will store a snapshot image.
  - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
  - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
- **Recording:** If an event occurs, the camera will record a video sequence.
  - **Store to Edge:** Check to store the event video to the cameras SD-card.
- **Email:** If an event occurs, an email message can be sent to the configured mail server.
  - **Enable:** Check to sent an email when an event occurs.
  - **Subject:** Enter the email subject.
  - Message: Enter the email message.
- **OSD:** If an event occurs, an OSD message can be displayed on the camera image.
  - **Enable:** Check to display a message on the image when an event occurs.
  - **Text:** Enter the message text.
- **Email:** If an event occurs, an email message can be sent to the configured mail server.
  - **Enable:** Check to sent an email when an event occurs.
  - **Subject:** Enter the email subject.
  - **Message:** Enter the email message.
- HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
  - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
  - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

#### Network

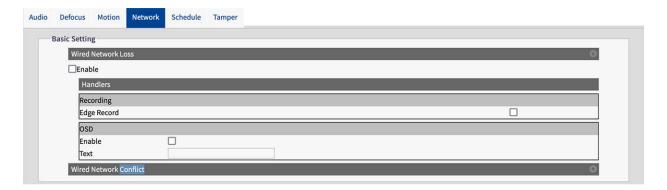

#### **Network**


The camera can handle event s of Wired Network Loss and Wired Network Conflicts.

- **Enable:** Check to activate the Network event handling.
- Handlers:
  - **Recording:** If an event occurs, the camera will record a video sequence.
    - **Store to Edge:** Check to store the event video to the cameras SD-card.
  - **OSD:** If an event occurs, an OSD message can be displayed on the camera image.
    - **Enable:** Check to display a message on the image when an event occurs.
    - **Text:** Enter the OSD message text.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Schedule**

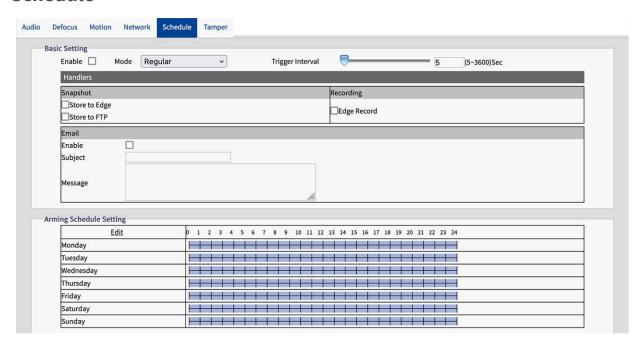

### **Basic Setting**

- **Enable:** Check to activate the schedule event handling.
- Mode:
  - **Regular:** Select if the recording, when activated, is to continue regularly based on the set trigger interval.
  - **Persist:** In "Regular" mode, the action is triggered at the selected interval.

■ **Trigger Interval:** It's about interval pertaining to above "Regular" mode. For example, if "60", schedule under Regular mode triggers on 60 seconds per time.

#### Handlers:


- **Snapshot:** If an event occurs, the camera will store a snapshot image.
  - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
  - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
- **Recording:** If an event occurs, the camera will record a video sequence.
  - **Store to Edge:** Check to store the event video to the cameras SD-card.
- **Email:** If an event occurs, an email message can be sent to the configured mail server.
  - **Enable:** Check to sent an email when an event occurs.
  - **Subject:** Enter the email subject.
  - Message: Enter the email message.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Tamper**

This function is used to trigger corresponding actions in the event of manipulation events on the camera.

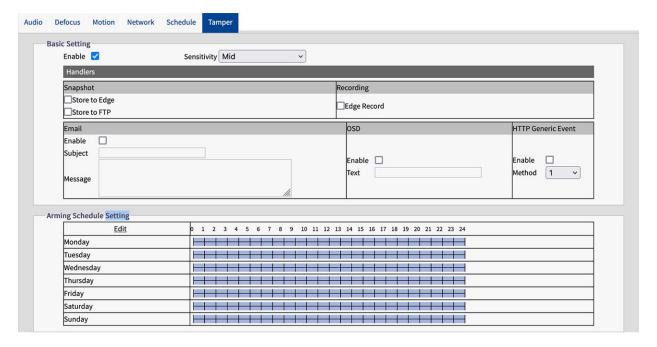


- **Enable:** Check to activate the tamper event handling.
- **Sensitivity:** Set the sensitivity for tampering detection. High means that the camera is triggered even in the event of slight tampering, while Low means that the camera is only triggered in the event of major tampering.
- Handlers:
  - **Snapshot:** If an event occurs, the camera will store a snapshot image.
    - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
    - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
  - **Recording:** If an event occurs, the camera will record a video sequence.
    - **Store to Edge:** Check to store the event video to the cameras SD-card.
  - **Email:** If an event occurs, an email message can be sent to the configured mail server.
    - **Enable:** Check to sent an email when an event occurs.
    - **Subject:** Enter the email subject.
    - **Message:** Enter the email message.
  - **OSD:** If an event occurs, an OSD message can be displayed on the camera image.
    - **Enable:** Check to display a message on the image when an event occurs.
    - **Text:** Enter the message text.
  - HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
    - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
    - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Arming Schedule Setting**



- 1. Click Edit.
- 2. Set up to three time periods for each day.


Monday    00:00	
06:00 19:59 20:00 23:59  Tuesday  00:00 06:00 19:59 20:00 23:59  Wednesday  00:00 06:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 23:59  Friday  00:00 06:00 19:59 20:00 19:59 20:00 23:59  Saturday  00:00 06:00 19:59 20:00 23:59	
Tuesday    00:00	<b>✓</b>
Tuesday  00:00 06:00 19:59 20:00 23:59  Wednesday  00:00 06:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 19:59 20:00 23:59  Friday  00:00 06:00 19:59 20:00 23:59  Saturday	
00:00	
06:00	
20:00 23:59  Wednesday  00:00 06:00 19:59 20:00 23:59  Thursday  00:00 06:00 19:59 20:00 19:59 20:00 23:59  Friday  00:00 06:00 19:59 20:00 19:59 20:00 23:59  Saturday  00:00 23:59	
Wednesday       00:00     06:00       06:00     19:59       20:00     23:59       Thursday       00:00     06:00       06:00     19:59       20:00     23:59       Friday       00:00     06:00       06:00     19:59       20:00     23:59       Saturday       00:00     23:59       00:00     23:59	
00:00	$\overline{\mathbf{V}}$
06:00 19:59 20:00 23:59  Thursday  00:00 06:00 06:00 19:59 20:00 23:59  Friday  00:00 06:00 06:00 19:59 20:00 19:59 20:00 23:59  Saturday  00:00 23:59  Saturday	
20:00 23:59  Thursday  00:00 06:00 06:00 19:59 20:00 23:59  Friday  00:00 06:00 06:00 19:59 20:00 19:59 20:00 23:59  Saturday  00:00 23:59	<b>✓</b>
Thursday  00:00 06:00 19:59 20:00 23:59  Friday  00:00 06:00 19:59 20:00 19:59 20:00 23:59  Saturday  00:00 00:00 23:59	
00:00	<b>✓</b>
06:00 19:59 20:00 23:59  Friday  00:00 06:00 06:00 19:59 20:00 23:59  Saturday  00:00 23:59 00:00 23:59	
20:00 23:59  Friday  00:00 06:00 06:00 19:59 20:00 23:59  Saturday  00:00 23:59  00:00 23:59	
Friday  00:00 06:00 19:59 20:00 23:59  Saturday  00:00 23:59 00:00 23:59	
00:00	<u> </u>
06:00 19:59 20:00 23:59  Saturday  00:00 23:59  00:00 23:59	
20:00 23:59  Saturday  00:00 23:59  00:00 23:59	<b>✓</b>
00:00 23:59 00:00 23:59	
00:00 23:59 00:00 23:59	
00:00 23:59	
	<b>✓</b>
00:00 23:59	<b>✓</b>
Sunday	
00:00 23:59	
00:00 23:59	<b>✓</b>
00:00 23:59	<u> </u>
	Apply Cance

- 3. Check for each time period if events should be handled.
- 4. Click "Apply" to save your settings.

### **Video Analytics**


Video Analytics (VA) includes the proprietary algorithm for performing intelligent video analytics, such as detecting intruders or loitering in a specific area based on suspicious objects or counting

people and traffic flows.



### General

This page contains general settings that apply to all Video Analytics functions. Before setting up the individual VA functions, you should define the basic settings here.



### **Basic Setting**

• **Sensitivity:** Select a sensitivity level to set a threshold value for triggering the VA functions. High means that the VA functions are triggered even for small events, while low means that they are only triggered for larger events.


### **Size Setting**

- Max Object Size: In the preview image, use the mouse to draw a rectangle that defines the maximum size of the object to be detected and then click on "Save" to activate the settings.
- **Min Object Size:** In the preview image, use the mouse to draw a rectangle that defines the minimum size of the object to be detected and then click on "Save" to activate the settings.

**NOTE!** To increase the accuracy of the VA functions, draw the size of the objects to be detected as accurately as possible.

### **Line Counting**

This function is used to count the number of moving objects that pass a defined line. Possible applications for this function are, for example, entrances and exits of a shopping center. It can also be used to count the flow of traffic.

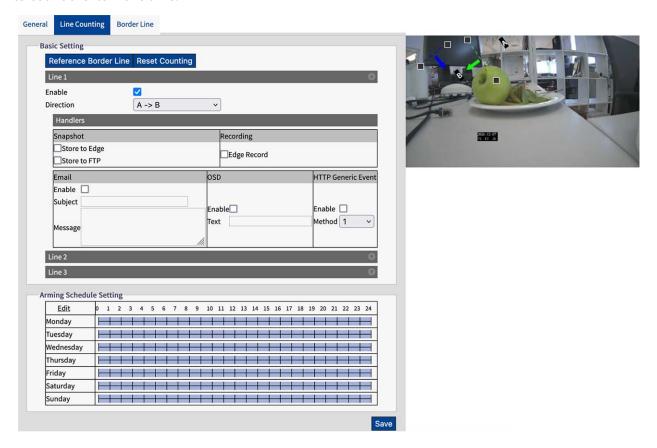

### **Basic Setting**

Draw a line in the preview image with the mouse.

You can draw up to three lines, each with the following settings:

- **Reference Border Line:** Click to set the identical settings from the function for the "Border Line" (see Border Line, p. 87).
- **Reset Counting:** Click to set the object count to zero.

You can make the following settings for each line:

**Enable:** Check to activate the Line Counting event handling.

**Direction:** Select the direction in which objects must cross the line to trigger an alarm.

### Handlers:


- **Snapshot:** If an event occurs, the camera will store a snapshot image.
  - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
  - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
- **Recording:** If an event occurs, the camera will record a video sequence.
  - **Store to Edge:** Check to store the event video to the cameras SD-card.
- **Email:** If an event occurs, an email message can be sent to the configured mail server.
  - **Enable:** Check to sent an email when an event occurs.
  - **Subject:** Enter the email subject.
  - **Message:** Enter the email message.
- OSD: If an event occurs, an OSD message can be displayed on the camera image.
  - **Enable:** Check to display a message on the image when an event occurs.
  - **Text:** Enter the message text.
- HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
  - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
  - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Border Line**

With this function, you can set border lines to survey specific areas within the camera's field of view. You can draw multiple lines around a specific area to monitor it, and as soon as the defined area is entered, an action can be triggered.

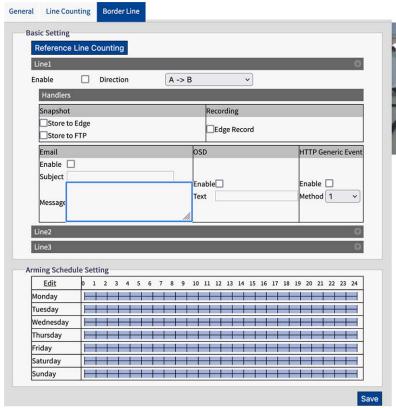



Draw a line in the preview image with the mouse.

You can draw up to three lines, each with the following settings:

■ **Reference Border Line:** Click to set the identical settings from the "Line Counting" function (see Line Counting, p. 86).

You can make the following settings for each line:

**Enable:** Check to activate the Border Line event handling.

**Direction:** Select the direction in which objects must cross the line to trigger an alarm.


- Handlers:
  - **Snapshot:** If an event occurs, the camera will store a snapshot image.
    - **Store to Edge:** Check to store snapshot images to the cameras SD-card.
    - **Store to FTP:** Check to store snapshot images to the configured FTP Server.
  - **Recording:** If an event occurs, the camera will record a video sequence.
    - **Store to Edge:** Check to store the event video to the cameras SD-card.
  - **Email:** If an event occurs, an email message can be sent to the configured mail server.
    - **Enable:** Check to sent an email when an event occurs.
    - **Subject:** Enter the email subject.
    - **Message:** Enter the email message.
  - **OSD:** If an event occurs, an OSD message can be displayed on the camera image.
    - **Enable:** Check to display a message on the image when an event occurs.
    - **Text:** Enter the message text.
  - HTTP Generic Event: If an event occurs, an HTTP Generic Event can be sent (see HTTP Generic Event, p. 95).
    - **Enable:** Check to sent an HTTP Generic Event message on the image when an event occurs.
    - **Method:** Select a configured HTTP Generic Event method.

### **Arming Schedule Setting**

See Arming Schedule Setting, p. 83.

### **Event Setting**


In this section, you can make detailed settings that define how the camera should process events that occur.

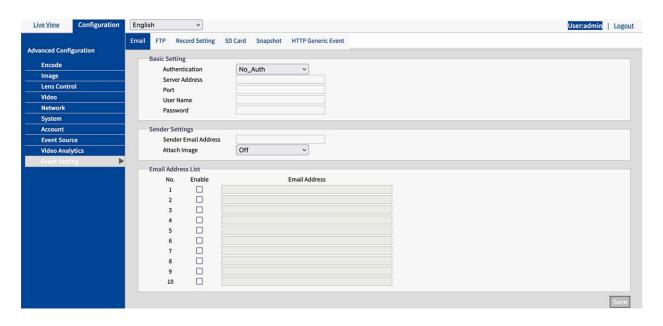

### **Email**

In this section, you can make detailed settings for e-mail notification of events.

**NOTE!** To use this function, make sure that you have activated the sending of e-mails in the event source settings (see Event Source, p. 74).

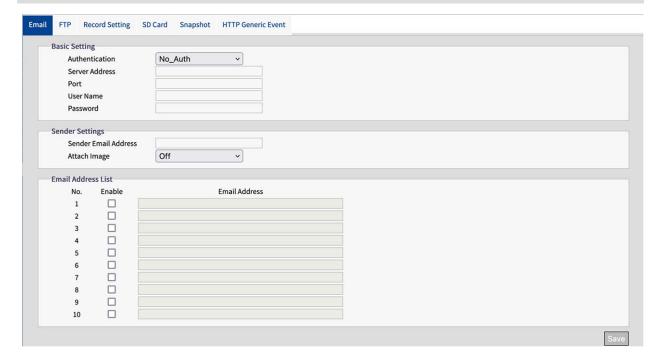

- **Authentication:** Select an authentication type:
- No\_Auth: No restriction (default).
  - **SMTP\_Plain:** PLAIN is the name of a registered SASL authentication mechanism that serves as a parameter for the AUTH command. The PLAIN authentication mechanism is described in RFC 2595. Plain is the least secure of all SASL authentication mechanisms, as the password is sent unencrypted over the network.
  - **Login:** The login mechanism is supported by various e-mail clients.
  - TLS\_TTLS: TLS (Transport Layer Security) is usually implemented in addition to one of the transport layer protocols that encapsulate application-specific protocols such as HTTP, FTP, SMTP, NNTP and XMPP. The TLS protocol enables client-server applications to communicate over a network in a way that prevents eavesdropping and tampering.
- **Server Address:** Enter the server address of the mail server
- Port: Enter the port for communication with the mail server. Usually the port number is 25.
- User Name: Enter the user name with which you log on to the mail server.
- **Password:** Enter the password of the user with which you log on to the mail server.

### **Sender Setting**

- Sender Email Address: Enter the Sender Email Address
- Attach Image: Set to "ON" to add an image of the time of the event as an attachment.

#### **Email Address List**

This function can be used to notify up to 10 recipients by e-mail when events occur.

- **Enable:** Check to activate the corresponding email address.
- **Email Address:** Enter the email address of the recipient to be notified.

#### **FTP**

In this section, you can connect a FTP Server to which images can be uploaded, when an event occurs.

**NOTE!** To use this function, make sure that you have activated store to FTP option in event source settings (see Event Source, p. 74).



- **Server Address:** Enter the server address of the FTP server.
- Port: Enter the port for communication with the FTP server. Usually the port number is 21.
- **User Name:** Enter the user name with which you log on to the FTP server.
- **Password:** Enter the password of the user with which you log on to the FTP server.
- **Mode:** Select a, which connection mode should be used:
  - **Active:** If you select "Active", the camera connects continuously to the FTP server, which requires more network bandwidth but enables an immediate response.
  - **Passive:** If you select the "Passive" option, the camera only establishes a connection to the FTP server when required.

### **Record Setting**

You can make detailed settings for video recording in this section.

**NOTE!** To use this function, make sure that you have activated recording option in the event source settings (see Event Source, p. 74).



### **Basic Setting**


- **Record Type:** Select a, which connection mode should be used:
  - **Video:** Only video will be recorded on event trigger (default).
  - Audio And Video: Both video and audio will be recorded on event.

- **Record Status:** Select a, which connection mode should be used:
  - One Shot: On event the camera records video with designated duration and file size (default).
  - **Continuous:** The camera keeps recording video continuously.
- Clip Duration: If record mode "One Shot" is selected you can a set a clip duration between 5 and 10 seconds.
- Clip Size: If record mode "One Shot" is selected you can a set a clip size between 50 and 100 MB.
- Record Codec: Select the preferred codec for MPEG recording. Available codecs are H.264 and H.265 (default)

### **SD Card**

In this section, you can make detailed settings for event recording on the SD card for events. You can also search for recordings on the SD card and download them.

**NOTE!** To use this function, make sure that you have activated recording option in the event source settings (see Event Source, p. 74).

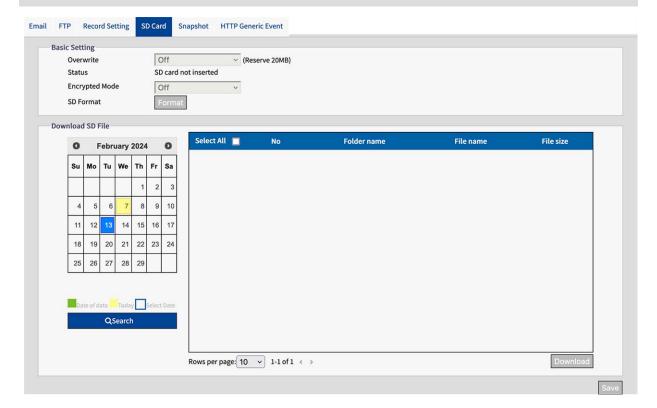

- Overwrite:
  - Off: Recordings on the SD card are not overwritten (default).
  - On: The recordings are overwritten as soon as the SD card is full. The oldest files are overwritten first. The process is started as soon as the remaining capacity of the built-in SD card is less than 20 MB.
- **Encryption Mode:** Data on the SD card is encrypted:
  - Off: Select this option if the data stored on the SD card is not to be encrypted. (default).
  - On: Select this option if the data stored on the SD card is to be encrypted.
- **SD Format:** Click to format the SD Card.

**NOTE!** Formatting the SD card, will always delete any data in the SD card no matter Encryption Mode is "On" or "Off".

**NOTE!** To access data stored on the SD card from Windows OS or Mac OS, a third party ext4 driver or application is required.

### **Snapshot**

In this section, you can make detailed settings for capturing snapshots of events.

**NOTE!** To use this function, make sure that you have activated snapshot options in the event source settings (see Event Source, p. 74).




### **Basic Setting**

- **Pre Event Capture Count:** Set a number of frames to be captured prior to an event. Maximum 10 frames are possible.
- **Event Capture Interval:** Set a time interval ranging from 1 to 10 seconds between each snapshot capture.
- Post Event Capture Count: Set a number of frames to be captured after an event occurred.

#### **HTTP Generic Event**

HTTP Generic Event, you can send messages and commands, for example, directly to a network video recorder (NVR) that supports the CGI command function. You can customize the messages and commands as required in the event source settings.

**NOTE!** To use this function, make sure that you have activated HTTP Generic Event options in the event source settings (see Event Source, p. 74).

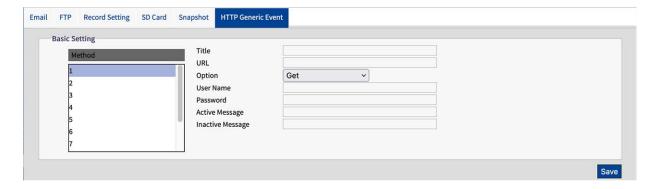

### **Basic Setting**

- Method: Select the Event Method you want to specify. If necessary, ask your administrator about the required method.
- **Title:** Set the title of the event messages.
- URL: Enter the web address of the event recipient.
- **Option:** Select the method of the event transmission.
  - **GET:** The Get method is a simple and fast method to transmit messages but it is less secure than Post.
  - **POST:** The Post method is a more complicated way of transmitting messages, but also somewhat more secure than the Get method.
- User Name: Enter the user name with which you log on to the server.
- **Password:** Enter the password of the user with which you log on to the server.
- Active Message: The camera will send an active message to Server when an trigger event occurs.
- Inactive Message: The camera will send an inactive message to Server when an trigger event occurs.

6

# **Technical Support Information**

This section contains the following information:

<b>Technical Specifications</b>		98
DORI Specifications	1	02

## **Technical Specifications**

### **Product Information**

Product Name	2MP IR Vandal Turret
Order Code	Mx-VT1A-2-IR

### **Hardware Design**

Processor	Novatec NT98560 (Single-core ARM® Cortex®-A9, 960 MHz)
Memory	RAM: 512 MB
	FLASH: 256 MB
Image Sensor	5MP, 1/2.8" Progressive CMOS
Effective (Used) Pixels	1920x1080 (2MP)

### Lens

Minimum Illumination	Color: 0.03 lux
	B/W: 0.01 lux, (0 lux, IR on)
	F1.6, AGC=on, 30 IRE, 1/1 s
Lens Characteristics	Fixed Lens
	Focal Length: 2.8mm
	Aperture: F1.6
	H x V FOV: 105°x 56°

### **Camera**

Day/Night	Automatically switchable IR-cut filter
Shutter Speed	Auto / Manual / WDR: 1 to 1/10000 s
Shutter Priority Mode	Up to 1/7.5 s
Frame Rate (maximum)	WDR on/off:
	H.265/H.264: 5MP@30 fps
	MJPEG: 2MP@30 fps
Auto Gain	Min. gain: 0 dB, max. gain: 36 dB, step size: 3

WDR	Up to 120 dB
Zoom	Fixed
Image Settings	Color, Brightness, Sharpness, Contrast, White Balance, Gain Control, 2DNR, 3DNR, BLC, EV, Gamma corection, Saturation, Hue
Image Rotation	90°, 180°, 270°
Camera Body Adjust	Pan/Tilt/Rotation

### **Video Codec**

Compression/Encoding	H.265/H.264/MJPEG
Streaming	Up to 3 individually configurable streams in H.264/H.265/MJPEG.
	Configurable resolution, frame rate, bandwidth CVBR/CBR/istream in
	H.265/H.264

### **Audio Codec**

Compression/Encoding	G.711a/u
Streaming	One-way
Audio Input	Integrated Microphone

### **Cyber Security Features**

Password Protection	Yes (including "forced" password change during initial setup)
IP address filtering	Yes (to restrict unauthorized access based on IP addresses)
IEEE 802.1X network access control	Yes (for advanced network security and authentication)
Digest authentication	Yes (for secure user authentication)
Secure Boot	Yes (support of fixed IP setting and automatic DHCP IP configuration according to individual MAC address)
AES encryption for password protection	Yes (to ensure strong encryption for password storage)
HTTPS/SSL (using TLS)	Yes (TLS 1.2 default, TLS 1.0/1.1 optional selectable)

User and Group Management	Yes (for fine-grained access control)		
Advanced Security	Yes (Active/Passive: <b>Active</b> protection controls the enabling and disabling of various network communications. <b>Passive</b> protection limits the number of operations and the duration of the ban. If the limit is reached, the user will be banned)		
RTSP Authentication	Yes (for restricting unauthorized access to RTSP streams)		
SFTP	Yes (network protocol that securely transfers files between a client and a server using SSH)		

### Network

Interface	10/100 Mbps Ethernet
Supported Protocols	ARP, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4/6, NTP, RTSP/RTCP/RTP, RTMP, QoS, SMTP, SNMP v1/2c/3, TCP, TLS/TTLS, UDP, UPnP, 802.1X, Bonjour, DDNS, PPPoE
ONVIF conformance	Supports profiles S/G/T/M
Supported Browsers	Microsoft Edge, Firefox, Google Chrome

## **System Integration**

Event Actions	Schedule Recording (JPG/MP4)	
	<ul> <li>DNN-based video analytics (line counting, border line, object classification/filtering for people, vehicles, etc.)</li> </ul>	
	Video and audio recording to edge storage	
	■ File upload: FTP and email	
	■ Notification: Email (JPG)	
	<ul><li>OSD indication</li></ul>	
	■ SD Card recording (*JPG/MP4)	

### General

Housing Material	Metal		
Housing Color	RAL 9003		
IR Illumination	850 nm; up to 30 m/98 ft distance depending on reflection of scenery		
Video Storage	Micro SD card support up to 512 GB.  Support for recording to MOVE NVR, MOBOTIX Cloud (via MOBOTIX Bridge), MOBOTIX HUB, MxMC (via MOBOTIX NAS)		
Remotely Upgradable	Yes		
Power Requirements	IEEE802.3af, class 3, max 10 watt DC12V, max 10 watt		
Connectors	<ul> <li>RJ45</li> <li>1 x DC 12V Jack Socket</li> <li>1 x Reset / Default Button</li> </ul>		
Environmental Protection Class	IP66/IK10		
Operating Temperature	−30°C to 60°C/-22°F to 140 °F with integrated heater ON		
Relative Humidity	95 % non-condensing		
Storage Conditions	–40 to 60 °C/–4 to 158 °F		
Approvals	EMC: CE, FCC, BIS Safety: LVD		
Warranty	5 years; mechanically wearable parts (motor, gears, belts, etc.) excluded		
Dimensions	ø 120 x 95 mm		
Weight	680 g		

**NOTE!** Observe the <u>MOBOTIX MOVE Installation Hints</u> document to ensure optimum performance of the camera features.

## **DORI Specifications**

In the video surveillance context, "DORI" stands for Detection, Observation, Recognition and Identification and is based on IEC EN62676-4: 2015. These levels define the minimum pixels that a face of a person must have to provide proper identification, for example.

### **DORI Levels According to IEC EN62676-4: 2015**

These levels define the minimum pixels that a face of a person must have to provide proper identification, for example.

- **Detection:** Up to this distance, you can reliably determine if a person or vehicle is present.
- **Observation:** Up to this distance, you can see characteristic details of an individual, such as distinctive clothing.
- **Recognition:** Up to this distance, you can determine with a high degree of certainty whether an individual is the same as someone that has been seen before.
- Identification: Up to this distance, you can determine the identity of an individual beyond reasonable doubt.

### **DORI Distances**

DORI Level	Detection	Observation	Recognition	Identification
Mx-VT1A-2-IR	18.5 m/ 60.86 ft	12 m/ 39.47 ft	8.13 m/ 26.74 ft	3.89 m/ 12.8 ft



