

SPEED PAN-TILT-UNIT "ROTOR HEAD" FOR MOBOTIX CAMERAS PT6i and PT6iL

Product number: 70004P00061 PT6i
70004P00062 PT6iL

Date: September 2020



FEATURES

This are our NEW MX PT6i PoE+ and USB interface with RJ45Plug and 1,0m cable length „Plug&Play“

List of supported cameras :

M15/ M16, M24/ M25, / M26 S14/ S15 and S16 and M73

(housing for MX-S -Series is extra to order)

The high-speed pan-tilt head features precision 12VDC stepper motors. It needs no mechanical stops due to sliding contacts.

- programming of 4 different endless Tours
- 128 presets
- different speeds
- IR- Head Light optical zoom 1-43° (optional)
- IR-Head light High power 30W (PT6iL)
- High Power White light 12W (optional)


PTs are already integrated in to the *MX Multi Viever®* and MX Software. So it is controllable by browser, software and Joystick

TECHNICAL SPECIFIKATION


Warranty:	2 years
Positions:	128 fixed positions
Rotation:	pan +360°, tilt -90°-+90°
Usability:	indoor and outdoor IP66
Construction:	cast aluminum, powder coat
Mounting accessories:	variety of accessories
Weatherproof:	to IP66
Capacity:	4 kg / 8,2 pounds
Pan speed:	80° per second
Tilt speed:	60° per second
Power consumption:	8W Standby / 12W pan/tilt
Temperature range:	-40°C to +60°C -40 to +140 Fahrenheit
Dimensions:	390x210x310x185mm
Packing size:	510x430x260 at 8kg
Comes with power adapter (for the head and a camera),	

RS232 cable and holes for MOBOTIX cameras with flexible holder


ACCESSORIES

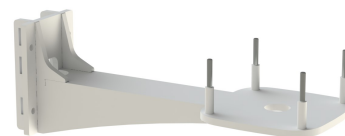


Delivery without camera and bracket

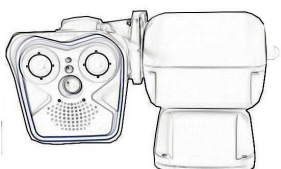

MOBOTIX
SOLUTION Partner

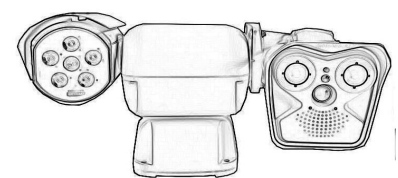

Technical Drawing

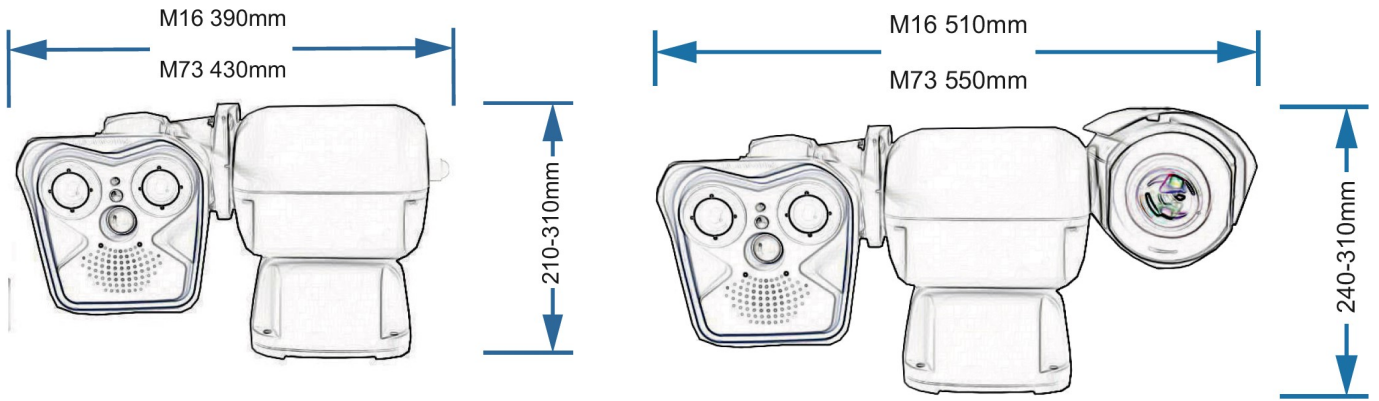

Technical Drawing Bracket

