

User Manual

AI-TECH Video Analytics Apps

© 2019 MOBOTIX AG



TOC

Support	5
Imprint	7
Legal information	8
AI-Dashboard embedded for data management	11
AI-Dash - configuration overview	12
AI-Dash - Administrator parameters	17
Event notification	30
Custom server compliant event notification	51
AI-Dash - troubleshooting	56
AI-SECURITY	59
AI-SECURITY - camera positions	59
AI-INTRUSION	60
AI-LOITERING	71
AI-LOST	75
AI-RETAIL3	81
AI-RETAIL - camera positions	81
Recomended distances	82
AI-PEOPLE	82
AI-PEOPLE: Aggregate counting	88
AI-CROWD	90
AI-OVERCROWD	95
AI-TRAFFIC	99
AI-TRAFFIC - camera positions	103
AI-ROAD 3D	104
AI-ROAD 3D: 3D calibration – Step 1	108
AI-ROAD 3D: 3D calibration – Step 2 - Case A	109
AI-ROAD 3D: 3D calibration – Step 2 - Case B	110

AI-ROAD 3D: 3D calibration – Step 3 - Case A	111
AI-ROAD 3D: 3D calibration – Step 3 - Case B	112
AI-ROAD 3D: 3D calibration examples	113
AI-ROAD 3D: 3D - troubleshooting	113
AI-INCIDENT	115
AI-PARKING	119
AI-PARKING - camera positions	119
AI-PARKING	120
AI-BIO	123
AI-BIO - camera positions	123
Recommended distances	124
AI-BIO	125
AI-OCCUPANCY	127
AI-OCCUPANCY - camera positions	127
AI-OCCUPANCY	128
AI-OVEROCCUPANCY	131
AI-OVEROCCUPANCY - camera positions	131
AI-OVEROCCUPANCY	132
AI-HEAT	135
AI-HEAT	136
AI-SPILL	139
AI-SPILL	139
AI-SMOKE	143
AI-SMOKE	143
AI-FIRE	147
AI-FIRE	147
List of figures	151

Support

If you need technical support, please contact your MOBOTIX-dealer. If your questions cannot be answered immediately, your reseller will forward your inquiries through the appropriate channels to ensure a quick response.

If you have Internet access, you can download additional documentation and software updates from the MOBOTIX-helpdesk. Please visit:

www.mobotix.com



Imprint

This document is part of products by MOBOTIX AG, hereinafter referred to as the manufacturer, and describes the use and configuration of AI-TECH Apps on the camera and its components.

Changes, errors and misprints excepted.

Copyright

This document is protected by copyright. The information contained herein may not be passed on to third parties without the express permission of the manufacturer. Contraventions will result in claims for damages.

Patent and copy protection

In the event that a patent, utility model or design protection is granted, all rights are reserved. Trademarks and product names are trademarks or registered trademarks of their respective companies or organizations.

Adress

MOBOTIX AG
Kaiserstrasse
67722 Langmeil
Germany
Tel.: +49 6302 9816-0
E-Mail: info@mobotix.com
Internet: www.mobotix.com

Support

See [Support](#), p. 5.

Legal information

special export regulations

Cameras with thermal imaging sensors ("thermal imaging cameras") are subject to the special sanctions and export regulations of the USA, including the ITAR (International Traffic in Arms Regulation):

- According to the current US sanctions and export regulations, cameras with thermal image sensors or parts thereof may not be delivered to countries or regions where the US has imposed an embargo, unless a special exemption has been granted. At present, this applies in particular to the states/regions of Syria, Iran, Cuba, North Korea, Sudan and Crimea. Furthermore, the corresponding ban on delivery also applies to all persons and institutions listed in "The Denied Persons List" (see www.bis.doc.gov > Policy Guidance > Lists of Parties of Concern; <https://www.treasury.gov/resource-center/sanctions/sdn-list/pages/default.aspx>).
- These cameras and the thermal imaging sensors used therein shall not be used in or be used in the design, development or production of nuclear, biological or chemical weapons.

Legal aspects of video and audio recording:

When using MOBOTIX AG products, the data protection regulations for video and audio recording must be observed. Depending on the state law and the place of installation, the recording of video and audio data may be subject to special requirements or prohibited. All users of MOBOTIX-Products are therefore requested to inform themselves about the currently valid regulations and to comply with them. MOBOTIX AG assumes no responsibility for product use that does not conform to legality.

Declaration of conformity.

The products of MOBOTIX AG are certified according to the applicable directives of the EU and other countries. You can find MOBOTIX AG's declarations of conformity for its products on the following website: www.mobotix.com under Support > Download Center > Documentation > Certificate & Declaration of Conformity.

Declaration of RoHS

The products of MOBOTIX AG comply with the requirements resulting from §5 ElektroG and the RoHS Directive 2011/65/EU, as far as they fall within the scope of these regulations. (die RoHS-declaration of MOBOTIX are available on the following website: www.mobotix.com under Support >Download Center > Documentation > Broschures & Instructions > Certificates).

Disposal

Electrical and electronic products contain many recyclable materials. Therefore, dispose MOBOTIX at the end of their service life in accordance with the applicable legal provisions and regulations (e.g. return to a municipal collection point). -Products must not be disposed of with household waste! Dispose of any battery in the product separately from the product (the respective product manuals contain a corresponding note if the product contains a battery).

Disclaimer

MOBOTIX AG is not liable for damage caused by improper handling of its products, failure to observe the operating instructions and the relevant regulations. Our General Terms and Conditions apply, the current version of which can be found to download at www.mobotix.com .

AI-Dashboard embedded for data management

The data generated by AI-PEOPLE, AI-CROWD and AI-OVERCROWD can be stored on board on the SD card of the camera through AI-Dashboard embedded.

The data can be visualized in two different ways:

- In tabular form, as a sequence of events. In this case (optionally) a sequence of images associated to the events is available (not for AI-CROWD).
- The graphics related to the events generated by the plugins, with the possibility to personalize the time interval and the time resolution.

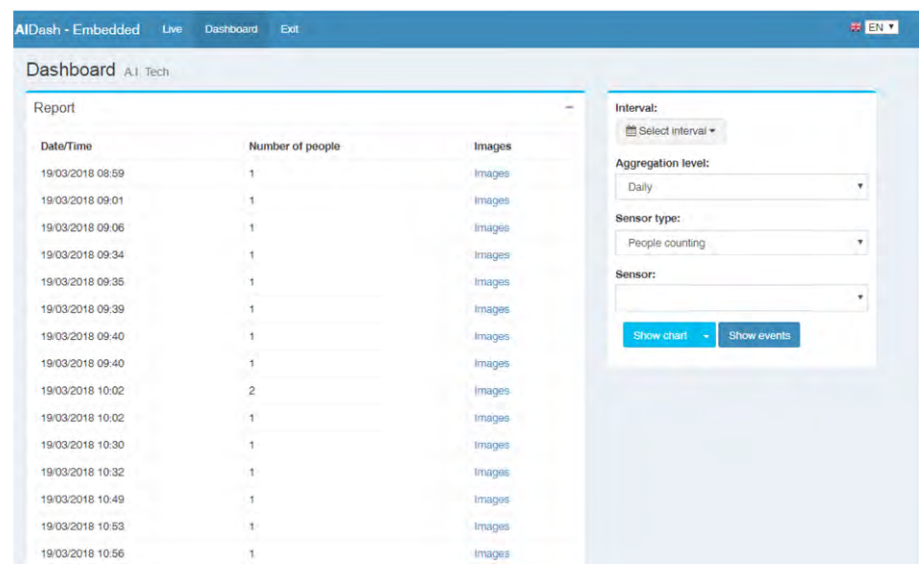


Fig. 1: Sequence of events

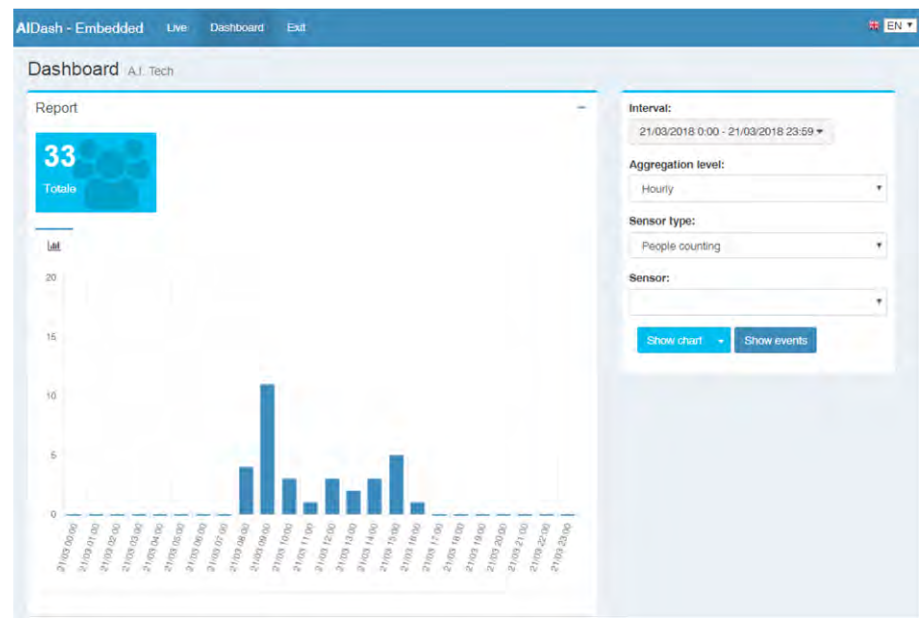


Fig. 2: Graphic

AI-Dash - configuration overview

The dashboard in general is divided into the following sections:

- The main menu on top
- The live view area on the left
- The parameter section on the right

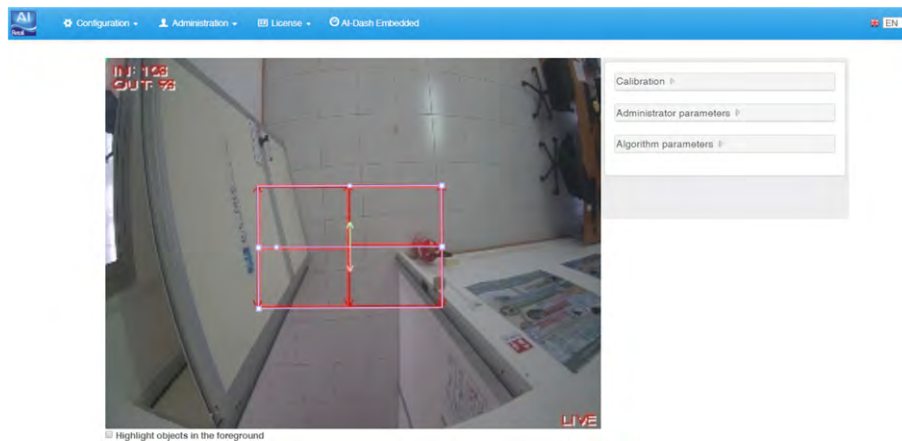


Fig. 3: Overview of the dashboard

Menu configuration

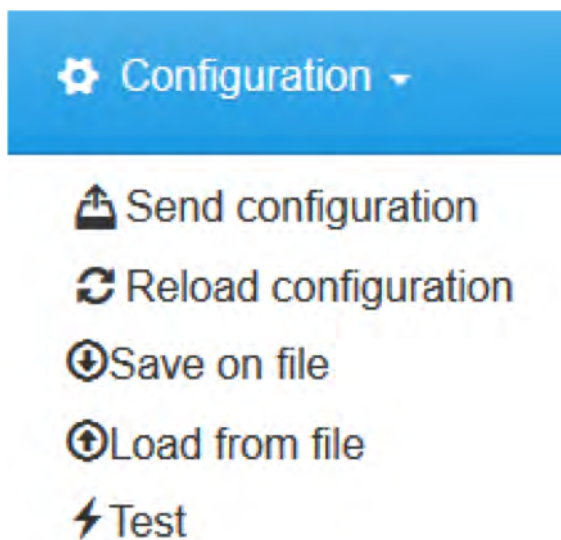


Fig. 4: Menu configuration

Note: Any changes made via AI-Config will only be applied to the application after the configuration has been sent using the function in this panel.

The following functions are available:

Send configuration: the configuration will be send and stored to the application.

Reload configuration: the current configuration will be loaded from the application .

Save on file: The configuration can be downloaded an saved as file in JSON format.

Load from file: The saved configuration can be loaded from a file in JSON format.

Test: sends a test event to all the enabled channels in order to verify that the configuration of the channels has been successful. Once clicked, simply click on the "Test" button in the window that will appear next. To exit the test mode, simply click anywhere on the screen.

Menu Administration

The administrator password to access the dashboard is the same as the cameras administrator password.

The default passwords for the app-administration are:

for **AI-RETAIL**: AIRetail3

for **AI-BIO**: AIBiolight

for **AI-SECURITY**: AISecurity3

for **AI-TRAFFIC**: AITraffic

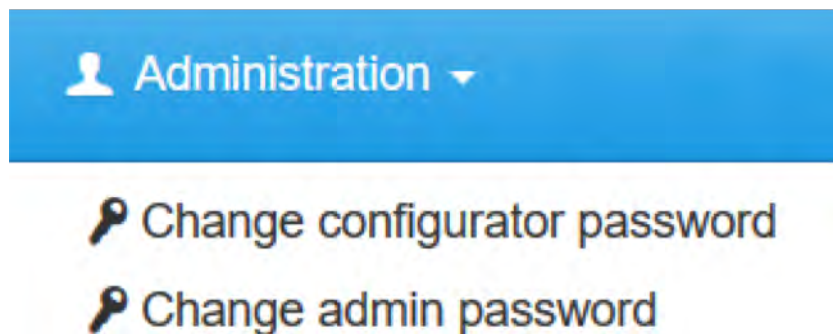


Fig. 5: Menu Administration

The following functions are available:

Change configurator password: a configurator can load a configuration but change the parameters

Change admin password: an administrator can fully edit all parameters.

Menu License

Licensing is available in MxManagementCenter only .

Highlight objects in the foreground

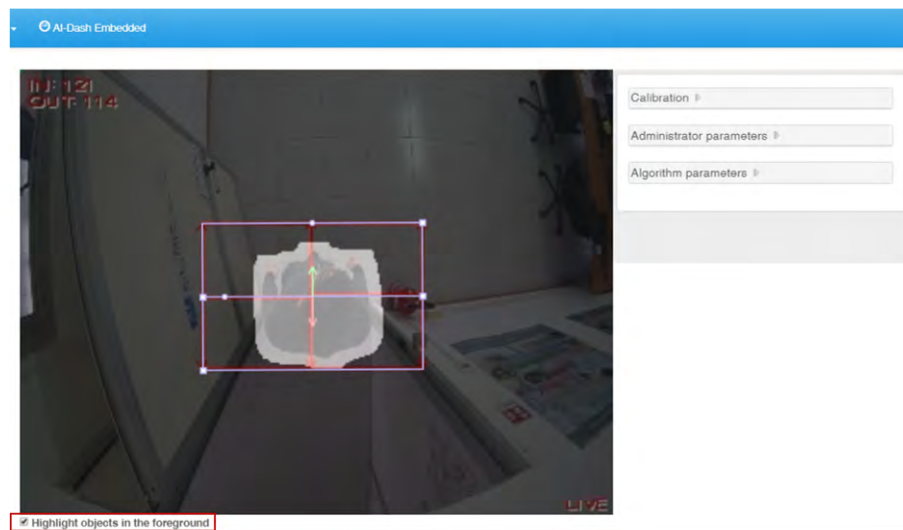


Fig. 6: Highlight objects in foreground

1. Activate Highlights objects in the foreground to verify if the configuration of the low level parameters is correct.

Scheduler

Scheduler

Activation rules

default

Add rule

Remove rule

ID:

0

Rule name:

default

☐ All day

Start time

00:00:00

End time

23:59:00

☒ No date

Days of week

☒ Sun ☒ Mon ☒ Tue ☒ Wed

☒ Thu ☒ Fri ☒ Sat

Deactivation rules

Fig. 7: Scheduler

In many real installations, applications do not always need to be active. It may be required, for example, to enable the processing only from Monday to Friday, or every day at a certain time interval.

For this reason AI-RETAIL can be scheduled by configuring the periods in which they must be active and those in which they do not.

AI-Dash - Administrator parameters

For more experienced users, it is also possible to change the administrator parameters.

In this section, you can modify the low-level parameters that are required for background updating and extraction of the foreground mask. It is generally suggested that you do not change these parameters. However, the modification of these requires significant experience, so it was decided to protect this configuration with a password.

The administrator password to access the dashboard is the same as the cameras administrator password.

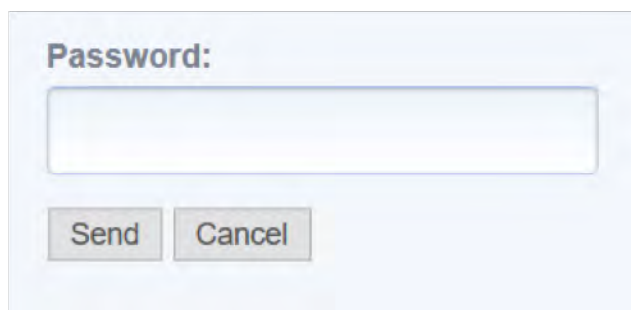
The default passwords for the app-administration are:


for AI-RETAIL: AIRetail3

for AI-BIO: AIBiolight

for AI-SECURITY: AISecurity3

for AI-TRAFFIC: AITraffic

A screenshot of a web-based administrator login form. The form has a light blue background. At the top, the word "Password:" is written in a bold, dark blue font. Below it is a rectangular text input field with a thin blue border. At the bottom of the form, there are two buttons: "Send" and "Cancel", both with a light gray background and a thin blue border.**Fig. 8: Administrator login with password**

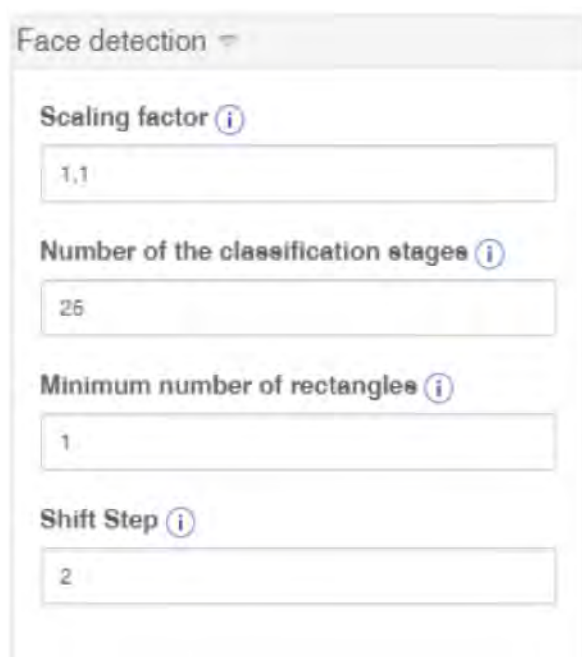Face detection (AI-BIO only)

Face detection ▾

Scaling factor ⓘ

1,1

Number of the classification stages ⓘ

25

Minimum number of rectangles ⓘ

1

Shift Step ⓘ

2

Fig. 9: AI-BIO Face detection

Scaling factor: Growing factor of the window for the face detection (default 1,1). By increasing the value of this parameter (max 2,0) you will make the algorithm faster but on the other hand it will become less sensible. Vice versa, by decreasing this value (min 1,01) the algorithm will become more sensible but also slower.

Number of classification stages: (default 25): Decreasing this value (it's suggested to not set it less than 18), the algorithm sensitivity is increased, but also the false positive rate is increased.

Minimum number of rectangles: Minimum number of rectangles to consider an object as a detected face (default 1 - maximum sensibility). Decreasing this value, the algorithm sensitivity is increased, but also increase the false positive (min 1) rate is increased. On the other hand, if this value is excessively increased, the miss rate may increase (it's suggested to not go further the value 10).

Shift step: Shift in pixels of the window for the face detection (default 2). Decreasing this value, the algorithm sensitivity and the processing time are increased (min 1). On the other hand, increasing this value, the sensitivity and the processing time may be reduced (it's suggested to not go further the value 10).

Gaussian filtering


The image shows a web-based configuration interface for 'Gaussian filtering'. It consists of a light gray header bar with the text 'Gaussian filtering' and a small downward-pointing triangle icon. Below the header is a white content area. Inside this area, the text 'Gaussian filtering' is displayed in a bold font. Below this text is a white rectangular box containing the text '3x3' and a small downward-pointing triangle icon, indicating a dropdown menu for selecting the kernel size.

Fig. 10: Gaussian filtering

Image pre-processing by gaussian filtering eliminates the acquisition noise on the image and makes subsequent operations for object detection easier and more effective. The default kernel is 3x3, while other possible values are 5x5 and 7x7.

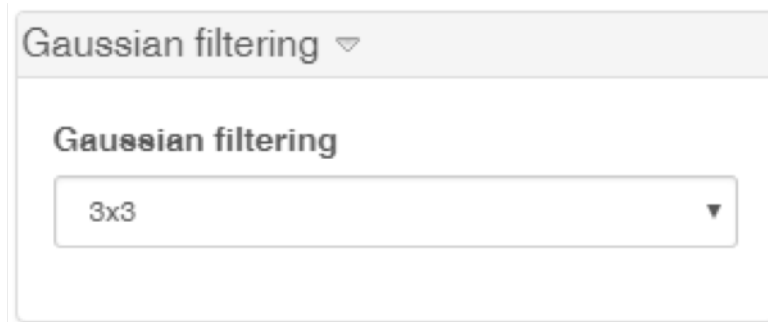Gaussian filtering can also be deactivated.

Background

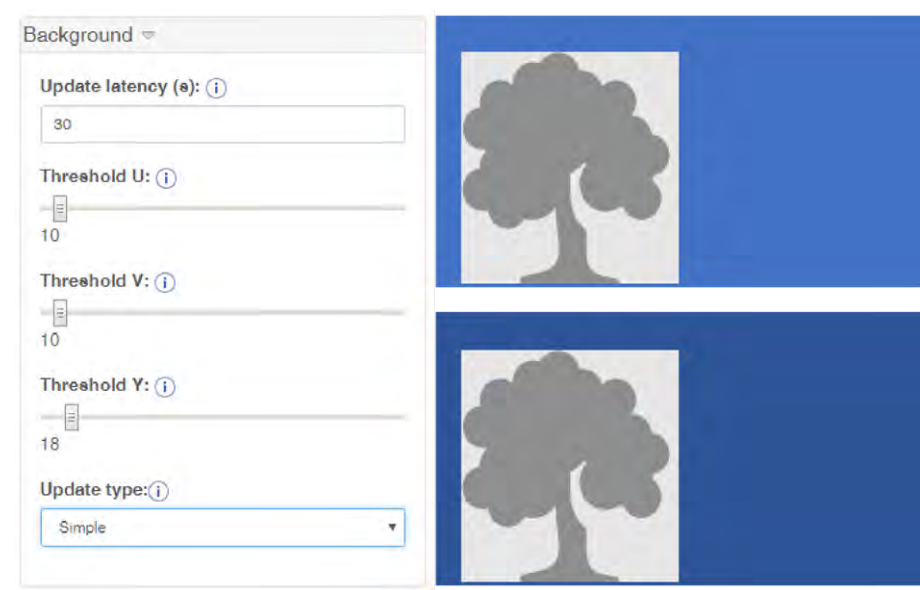


Fig. 11: Background

The background settings allow modeling and updating the background by setting the entry time of an object in the background

The output is an image in the YUV420 color space which represents the static part of the scene shot; it is then used to determine the dynamic part of the current frame, that is the foreground mask.

Update latency (s): Time period in seconds after a change in the scene must definitely become part of the background

Threshold (YUV): A comparison is made between the current frame and the background image of the previous instant: if the pixel of the frame is "close" to the corresponding pixel of the background, then it is not a foreground pixel; otherwise, that pixel will be white in the foreground mask. The comparison is made separately on each of the three YUV channels

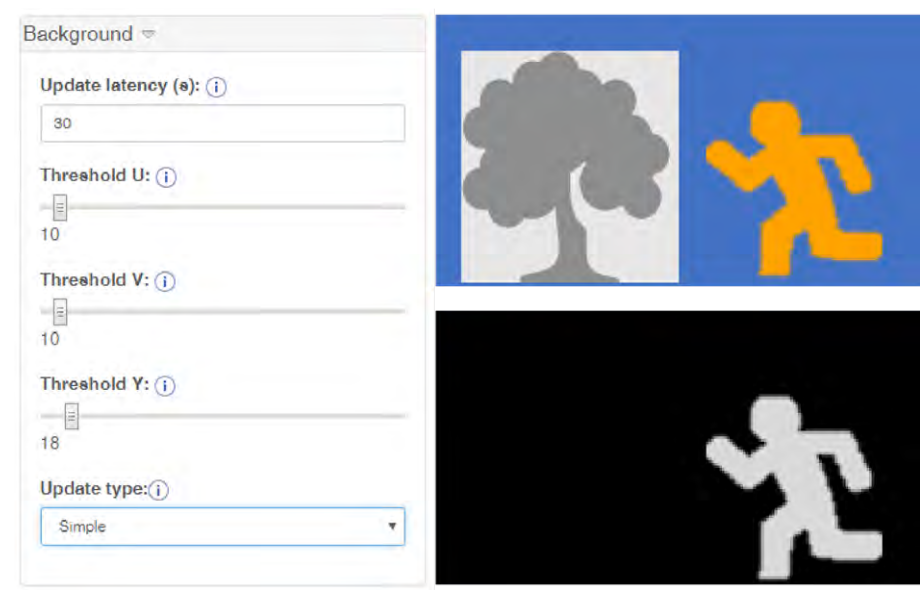


Fig. 12: Example background extraction using a threshold for each of the three YUV channels.

Update type: By specifying «Accurate (grayscale)» or «Accurate (color)» as background update type, it is possible to use a state of the art self learning algorithm for extracting the foreground mask. The «grayscale» version uses only the Y color channel, while the «color» version uses all the channels; of course, the first is more efficient, while the second is more effective. Moreover, the shadow removal can be enabled only with the color version.

Morphological filtering

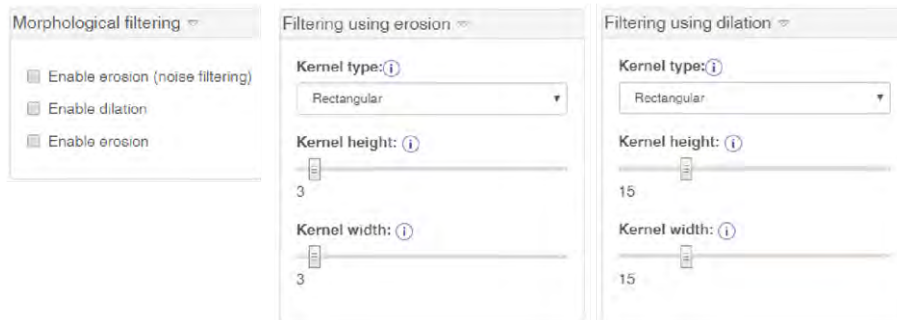


Fig. 13: Morphological filtering

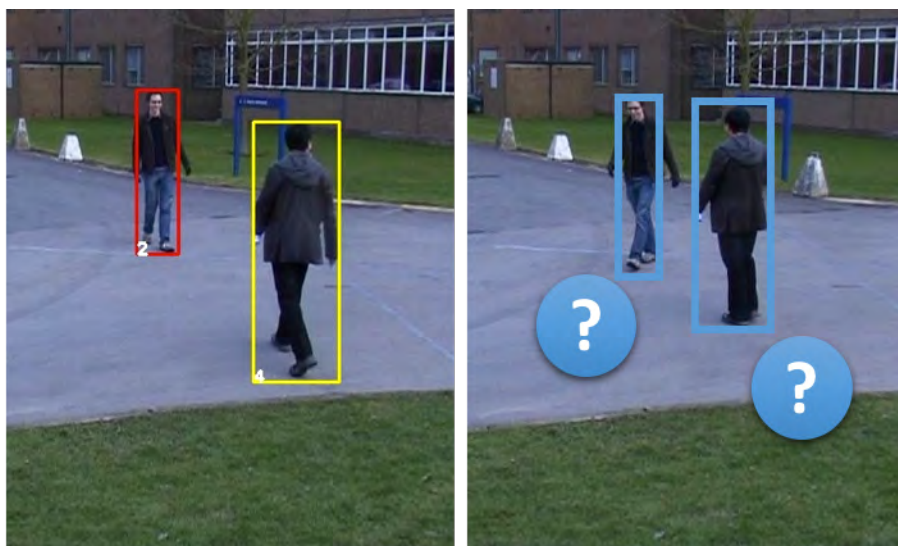
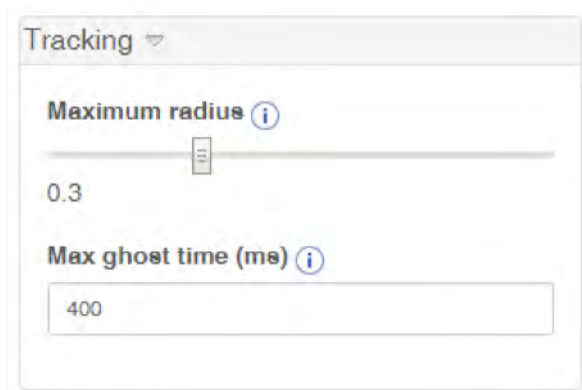
Application of morphological erosion, dilation and another erosion operators to improve the foreground mask

Enable erosion (noise filtering): eliminates the spurious white pixels caused by noise

Enable dilation: fills holes and reinforces the union of weakly connected regions.

Enable erosion: allows to recover the original size of the objects.

It is possible to choose the shape of the kernel to be used (rectangular, diamond, octagon, disk), as well as the dimension in terms of width and height (rectangular) or radius (diamond, octagon, disk).

Tracking (AI-BIO, AI-SECURITY only)**Fig. 14: Object tracking****Fig. 15: Tracking (AI-BIO and AI-SECURITY only)****Tracking of objects in different frames depending on the position in the image**

The objective is to find the correspondence between the detected object to the preceding frame ($t-1$) and the blob identified at the current frame (t), solving, in this way, problems related to occlusions (for example trees)

Maximum radius: Maximum movement of an object between two successive frames. A too small value may cause frequent switches of the ID, while a too large value may cause the assignment of the same ID to different objects. The value is expressed as a fraction of the frame diagonal.

Max ghost time (ms): Maximum time (in milliseconds) for which a detected object can assume the status of ghost, namely it can be stored and retrieved in case of occlusion.

Small objects filtering (AI-SECURITY only)

Small objects filtering

☒ Use aspect ratio ⓘ

Minimum Aspect Ratio

1.1

Maximum Aspect Ratio

4.1

☒ Enables filtering

Maximum width and height:

100	%
100	%

Minimum width and height:

0	%
0	%

Fig. 16: Small objects filtering (AI-SECURITY only)

Elimination of blobs that are too small, too large or abnormally shaped based on pixel dimensions

Use aspect ratio: Check to activate the aspect ration settings. The settings allow to detect, for example, only people or just cars.

Minimum Aspect Ratio: define the minimum value of the relationship between height and width.

Maximum Aspect Ratio: define the maximum value of the relationship between height and width.

Enable filtering: Check to activate the filtering settings. You can define minimum and maximum values for the height and width of a blob by drawing a couple of rectangles on the image.

Maximum width and height: define the maximum value of the object size.

Miniumum width and height: define the minimum value of the object size.

Filtering actual size (AI-SECURITY only)

To use this filter it is necessary first to calibrate the camera and the algorithm, to be able to calculate the relation that allows to deduce the real dimensions of an object starting from the pixel dimensions (see [Camera Calibration \(AI-SECURITY only\)](#), p. 25)



The screenshot shows a configuration window titled "Filtering actual size". Inside the window, there is a checkbox labeled "Enable filtering". Below this, there are two input fields. The first is labeled "Maximum height:" and contains the value "200". The second is labeled "Minimum height:" and contains the value "50". Both labels have a small circular information icon to their right.

Fig. 17: Filtering actual size (AI-SECURITY only)

This filter allows the elimination of blobs that are too short or too tall based on actual size

Enable filtering: Check to activate the filtering settings. You can define minimum and maximum values for the height and width of a blob.

Maximum height: define the maximum height of a blob.

Minimum height: define the minimum height of a blob.

Camera Calibration (AI-SECURITY only)

The camera calibration has to be done before filtering the actual size (see [Filtering actual size \(AI-SECURITY only\)](#), p. 24)



Calibration ▾

Camera height (m): ⓘ

3

Horizontal angle ⓘ

75

Vertical angle ⓘ

40

Fig. 18: Camera Calibration (AI-SECURITY only)

This filter allows the elimination of blobs that are too short or too tall based on actual size.

Camera height (m): mounting height of the camera in meters.

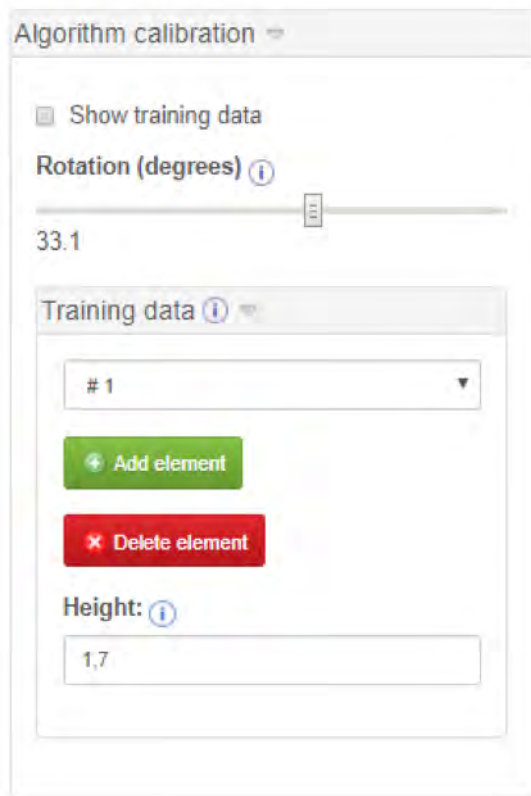
Horizontal angle: cameras horizontal angle of view in degree. It is available on the datasheet of a fixed focal cameras, to be calculated for varifocal cameras.

Vertical angle: cameras vertical angle of view in degree. It is available on the datasheet of a fixed focal cameras, to be calculated for varifocal cameras.

Algorithm parameters (AI-SECURITY) only

Algorithm calibration

Algorithm calibration provides a collection of samples to train an algorithm that calculates the actual dimensions from those in pixels



The screenshot shows the 'Algorithm calibration' window. At the top, there is a checkbox labeled 'Show training data'. Below it is a slider for 'Rotation (degrees)' with an information icon, currently set to 33.1. Underneath is a 'Training data' section with a dropdown menu showing '# 1', a green 'Add element' button, and a red 'Delete element' button. At the bottom, there is a 'Height' input field with an information icon, containing the value '1,7'.

Fig. 19: Algorithm calibration (AI-SECURITY only)

This filter allows the elimination of blobs that are too short or too tall based on actual size.

Show training data: Check to show training data in the preview image.

Rotation (degrees): Camera rotation in reference to the horizontal plane.

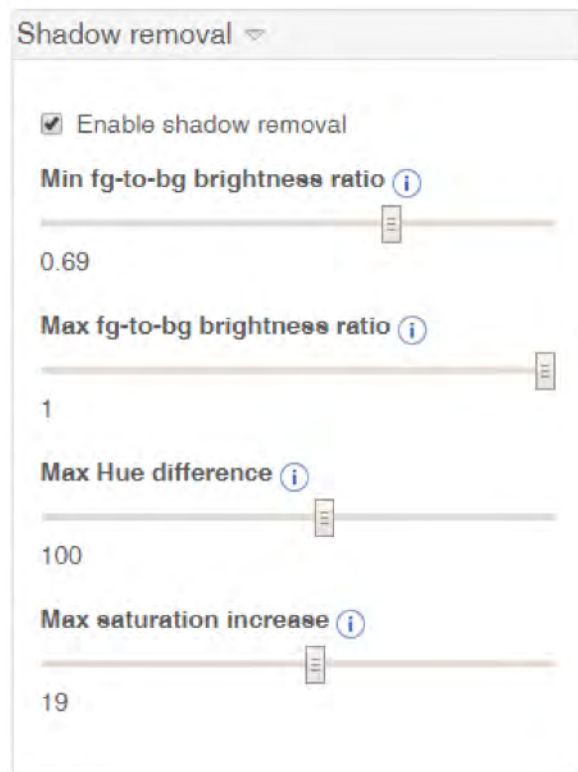
Add element: ask a person of known height to move in different positions in the scene and at different distances from the camera. Drawing a rectangle around the person every time he stops.

Delete element: Click to delete the selected element.

Height (m): Height of the element in meters.

Shadow removal(AI-SECURITY only)

The algorithm for shadow removal is based on the analysis of the chromaticity difference between the background and the current frame, since the shadows typically make the pixels darker.



The screenshot shows a settings panel titled "Shadow removal" with a dropdown arrow. It contains four settings, each with a checkbox, a label, an information icon, and a slider:

- Enable shadow removal:** A checked checkbox.
- Min fg-to-bg brightness ratio:** A slider with a value of 0.69.
- Max fg-to-bg brightness ratio:** A slider with a value of 1.
- Max Hue difference:** A slider with a value of 100.
- Max saturation increase:** A slider with a value of 19.

Fig. 20: Shadow removal (AI-SECURITY only)

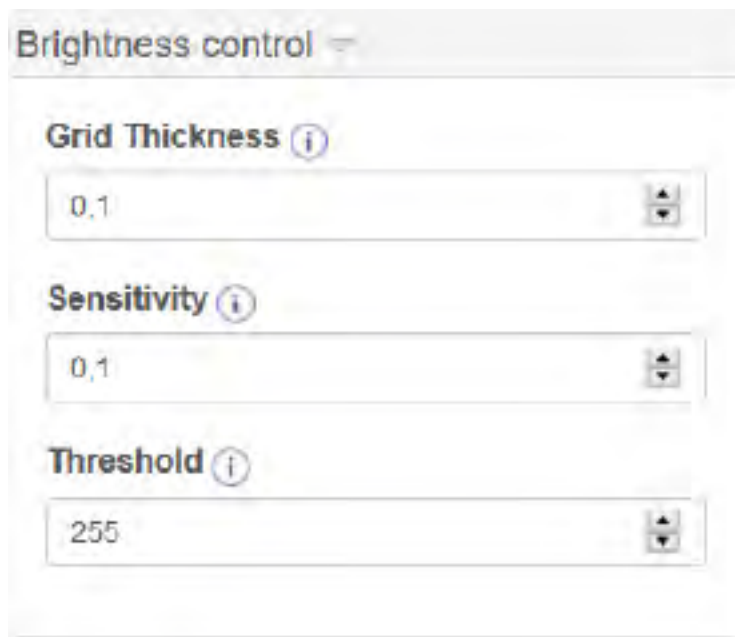
Enable shadow removal: Check to activate the shadow removal settings.

Min fg-to-bg brightness ratio: Decreasing this value means the algorithm gets mor sensitive.

Max fg-to-bg brightness ratio: Increasing this value means the algorithm gets mor sensitive.

Max hue difference: Increasing this value means the algorithm gets mor sensitive and therefore removes also strong shadows.

Max saturation increase: Increasing this value means the algorithm gets mor sensitive and therefore removes also strong shadows.

Brightness control

Brightness control

Grid Thickness ⓘ

0,1

Sensitivity ⓘ

0,1

Threshold ⓘ


255

Fig. 21: Brightness control

When sudden changes in brightness occur in the scene, the difference between the current frame and the background instantly becomes very high, generating a lot of noise on the foreground mask. The detection of this abnormal situation allows application to stop for a few moments the processing, allowing the background to automatically adapt to the brightness of the scene change.

For efficiency reasons the algorithm works on a grid built on the image and evaluates the differences in brightness only in grid intersections.

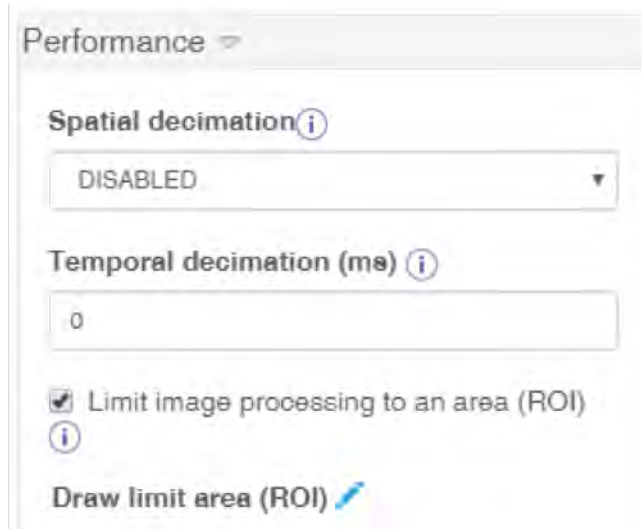Performance



The screenshot shows a 'Performance' settings panel. It contains three main sections: 'Spatial decimation' with a dropdown menu set to 'DISABLED'; 'Temporal decimation (ms)' with a text input field containing '0'; and a checkbox labeled 'Limit image processing to an area (ROI)' which is checked. Below the checkbox is an information icon and a button labeled 'Draw limit area (ROI)' with a pencil icon.

Fig. 22: Performance

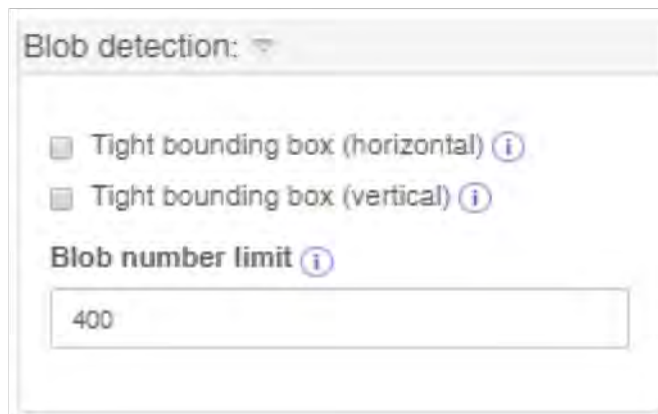
Performance optimizations to make the algorithms more efficient.

Spatial decimation: consists in reducing the resolution at which the algorithm processes images. It is possible to reduce the size by a factor of 2 or 4, processing an image that is respectively a quarter or a sixteenth compared to the initial one.

Temporal decimation: allows to "discard" some frames, processing a picture every K milliseconds.

ROI: allows to perform the image processing only in the region drawn by the user.

Blob detection (AI-SECURITY only)



The screenshot shows a 'Blob detection' settings panel. It contains two checkboxes: 'Tight bounding box (horizontal)' and 'Tight bounding box (vertical)', both of which are unchecked. Below these is a section labeled 'Blob number limit' with an information icon and a text input field containing the value '400'.


Fig. 23: Blob detection (AI-SECURITY) only

Tight bounding box (horizontal): consists in reducing the horizontal dimension of the bounding box by centering it with respect to the centroid.

Tight bounding box (vertical): consists in reducing the vertical dimension of the bounding box by centering it with respect to the centroid.

Blob number limit: allows to limit the number of blobs detected by the plugin in a single frame.

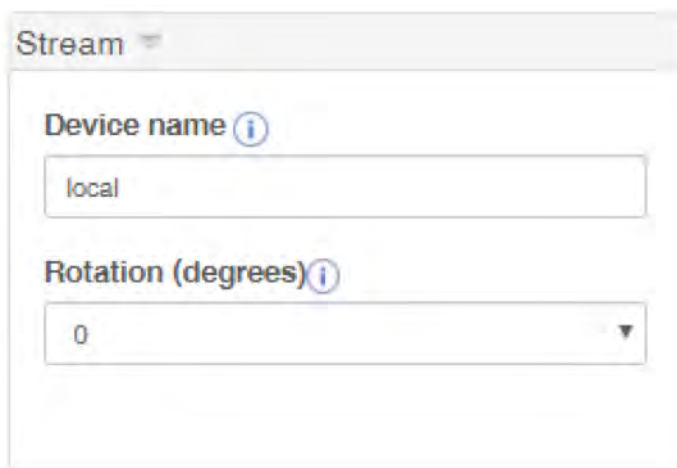Stream

A configuration panel titled "Stream" with a dropdown arrow. It contains two settings: "Device name" with an information icon and a text input field containing "local"; and "Rotation (degrees)" with an information icon and a dropdown menu currently showing "0".

Stream ▾

Device name ⓘ

local

Rotation (degrees) ⓘ

0 ▾

Fig. 24: Stream

Ability to process a rotated image compared to that acquired by the camera. This operation, however, it may be interesting in the case where, for example, you want to install a camera in portrait mode, so as to take advantage of the horizontal opening angle of the camera to frame a person standing.

Device name: change the name of the stream

Rotation (degrees): image can be rotated by 90 °, 180 ° and 270 °.

Event notification

All AI-Apps can notify each event simultaneously to multiple recipients. You can enable and configure each recipient in the specific section of the events panel.

You can also specify for each event the channel on which you want to be notified. In the configuration section it is possible to enable the sending of only the desired events. This way you can completely customize the events sending. You can choose which event to send for each channel.

AI-RETAIL Events

Counting event is generated every time a person crosses a people counting sensor. The event gives information about the number of persons which crossed the sensor simultaneously and related to the total number of crossings counted by the sensor since the last reset. It can be sent with and without images.

Aggregate event is generated when the number of persons (IN-OUT) is greater than a threshold configured by the user. Such event can be used as an alarm or like an advertisement of overcrowding, in case of a single entrance/exit gate. It can be sent with and without images.

Crowd event is generated periodically, with a period specified by the user during plugin configuration, giving an estimation of the average number of persons in the considered period. Such event can be used for collecting statistics about the retail shop. It can be sent ONLY without images.

Overcrowd event is generated when the estimated number of persons in the sensor is greater than a threshold configured by the user. Such event can be used as an alarm or like an advertisement of overcrowding. It can be sent with and without images.

Test event is generated by the user, clicking on the specific button on AI-Config. It can be used to verify the communication with the event collectors.

AI-BIO Events

Bio event is generated when a person, whose face has been detected, leaves the scene. The event gives information about the gender, the age category and the persistence time of each person in front of the camera. It can be sent with and without images.

Digital_Signage event is generated when persons are detected in front of the camera, after a minimum period of persistence. The event gives information about the average gender and age of the persons. It can be sent with and without images.

Test event is generated by the user, clicking on the specific button on AI-Config. It can be used to verify the communication with the event collectors.

AI-SECURITY Events

Sterile_Zone is generated when an intruder persists in a sterile zone. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Crossing_Line event is generated when an object crosses a line. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Intrusion_Pro event is generated when an object crosses a multiple line. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Lost event is generated when an object is abandoned or removed in a lost sensor. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Loitering event is generated when a loitering behavior is detected in a loitering sensor. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Test event is generated by the user, clicking on the specific button on AI-Config. It can be used to verify the communication with the event collectors.

AI-TRAFFIC Events

Sterile_Zone is generated when an intruder persists in a sterile zone. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Crossing_Line event is generated when an object crosses a line. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Intrusion_Pro event is generated when an object crosses a multiple line. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Lost event is generated when an object is abandoned or removed in a lost sensor. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Loitering event is generated when a loitering behavior is detected in a loitering sensor. The event gives information about the position of the object which generated the alarm. It can be sent with and without images.

Test event event is generated by the user, clicking on the specific button on AI-Config. It can be used to verify the communication with the event collectors.

Image saving options

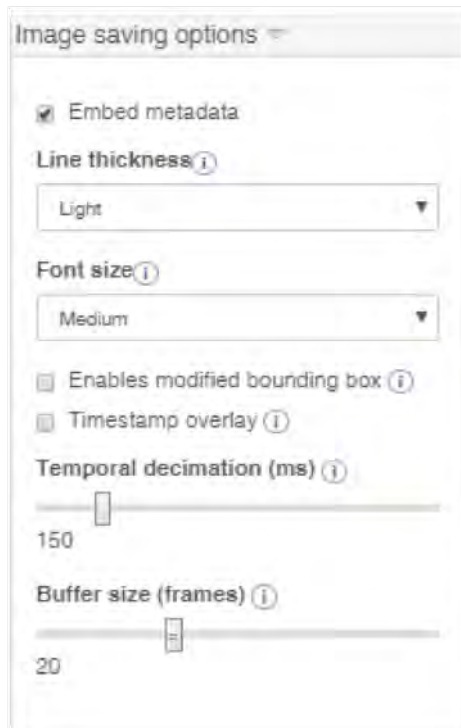


Image saving options

☒ Embed metadata

Line thickness ⓘ

Light

Font size ⓘ

Medium

☐ Enables modified bounding box ⓘ

☐ Timestamp overlay ⓘ

Temporal decimation (ms) ⓘ

150

Buffer size (frames) ⓘ

20

Fig. 25: Images saving options

Embed metadata: activate to enable the sending of annotated images (with sensors and bounding boxes for example) associated to the events.

Line thickness: specify the thickness of bounding boxes and the font size of the superimposed strings.

Font size: specify the font size of the superimposed strings.

Modified bounding box: when enabled a bounding box is drawn, which allows to observe the object orientation in the image.

Timestamp overlay: shows the date and hour overlay on the top right of the image.

Finally, since many event managers allows to send images in a time interval pre and post event, it is possible to specify the buffer size in frames and the time interval between consecutive frames saved in the buffer.

ATTENTION – The buffer size configuration and the temporal decimation with whom the frames are stored impose a limit on the number to PRE and POST seconds of images that can be associated to the events

Embedded AI-Dash

☒ Enable embedded AI-Dash ⓘ

Embedded AI-Dash folder ⓘ

Maximum size ⓘ

200

☐ Send images

sec pre-event ⓘ

sec post-event ⓘ

Fig. 26: Embedded AI-Dash

- Enable AI-Dashboard embedded:** activate to send events to AI-Dashboard embedded.
- Embedded AI-Dash folder:** folder in which theAI-Dashboard embedded database is created.
- Maximum size:**maximum size (in MB) that AI-Dashboard embedded can occupy on the device.
- Send images:** activate to send event images to AI-Dashboard embedded database
- # Sec pre-event:** Number of seconds of images before event.
- # Sec post-event:** Number of seconds of images after event.

External AI-Dash

Fig. 27: External AI-Dash

Enable send sending events: activate to send events to external AI-Dash.

IP: IP address of the server on which AI-Dash is installed (both server version and a cloud version).

Port: Port on which AI-Dash listens.

AI-Dash ID: Once created on AI-Dash PRO the identifier related to your site and company, you can insert it in this field. For more detail, please refer to the documentation of AI-Dash PRO.

Backward compatibility with AI-Dash: Enable this field if you have AI-Dash and not the new AI-Dash PRO (for more details please refer to the custom server notification in the following).

Send images: activate to send event images to AI-Dash database

Sec pre-event: Number of seconds of images before event.

Sec post-event: Number of seconds of images after event.

ATTENTION! To receive events, it may be necessary to disable the firewall

Wisenet WAVE

Wisenet WAVE VMS

☒ Enable sending events

IP:

172.16.35.235

Port:

7001

Username:

admin

Password:

☒ Use HTTPS

Fig. 28: Wisenet WAVE

Enable send sending events: activate to send events to Wisenet Wave.

IP: IP address of Wisenet WAVE VMS.

Port: Port number of the Wisenet WAVE VMS.

Username: Username to authenticate the Wisenet WAVE VMS.

Password: Password to authenticate to the Wisenet WAVE VMS.

Use HTTPS: activate to send events through https

The event sending to Wisenet WAVE is not supported for Crowd events

Hanwha SSM

Hanwha SSM

☒ Enable sending events

IP: ⓘ
192.168.1.100

Port: ⓘ
9999

Device GUID ⓘ
af4eeef0-a33a-4c30-9dc8-24dbd1694039

Event Code ⓘ
4000

Set the server timezone ⓘ
+0200

Fig. 29: Hanwha SSM

Enable send sending events: activate to send events to Hanwha SSM.

IP: IP address of the server on which SSM is installed

Port: Port number of the SSM.

Device GUID: device identifier to read on SSM.

Set the server timezone:SSM server timezone.

The sending of events to Wisenet SSM is not supported for Crowd events.

Text Sender Configuration

This mechanism makes the app integrated with the Wisenet NVR.

Text Sender Configuration

☒ Enable sending events

IP:

172.16.35.160

Port:

7004

Path:

Mime Type:

text/plain

Charset:

utf-8

☐ Use Url Encode:

Message Format:

SRT_EV%eEND_EV

Fig. 30: Text sender configuration

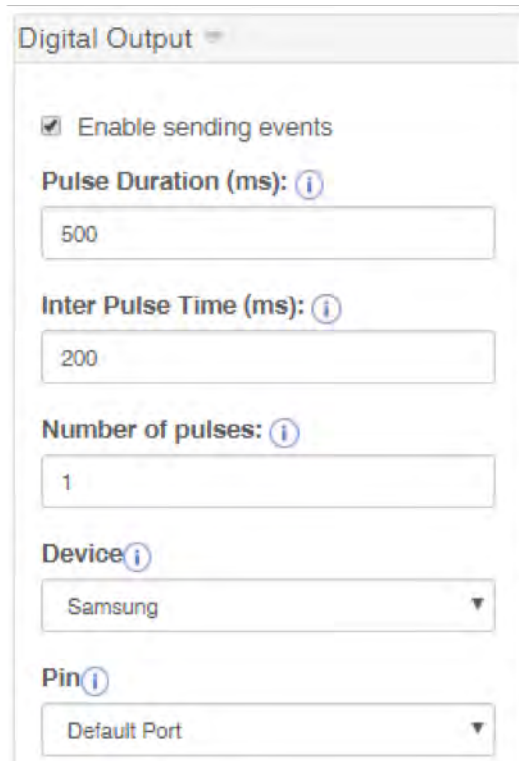
- Enable send sending events:** activate to send events.
- IP:** IP address of the server on which AI-Dash is installed in both the server version and a cloud version.
- Port:** Port number.
- Path:** Path for the POST to the receiving server;.
- MIME type:** MIME Type with which the message will be transmitted.
- charset:** Character set for the message text.
- Use URL Encode:** indicates that the message is encoded using URL Encode for sending.
- Message Format:** message text sent to the server. Thes palceholders can be used in the message text

- **event name:** %e
- **device name:** %d
- **sensor name:** %s
- **date:** %t (format DD / MM / YYYY)

Use URL Encode: indicates that the message is encoded using URL Encode for sending.

The sending of text events is not supported for Crowd events.

Digital output



Digital Output

☒ Enable sending events

Pulse Duration (ms): [i](#)

500

Inter Pulse Time (ms): [i](#)

200

Number of pulses: [i](#)

1

Device [i](#)

Samsung ▼

Pin [i](#)

Default Port ▼

Fig. 31: Digital output

Enable send sending events: activate to send event via a digital output.

Single pulse duration (ms): duration of a single pulse in milliseconds.

Pulse Interval (ms): Time in ms between two pulses.

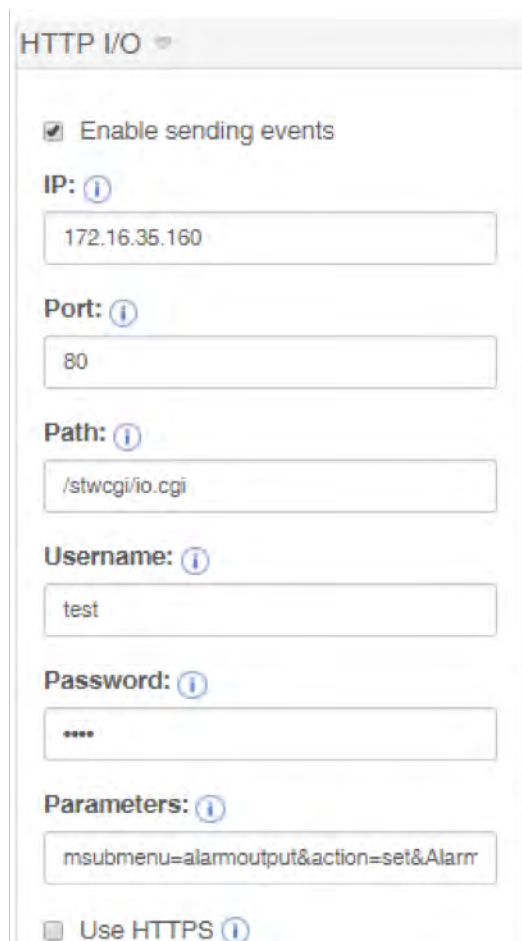
Number of pulses: Number of pulses sent through the alarm out port.

Device: Device on which the application is running.

Pin: Pin you want to use on the device.

Sending of events to digital inputs is not supported for Crowd events.

HTTP I/O



HTTP I/O

☒ Enable sending events

IP:

Port:

Path:

Username:

Password:

Parameters:

☐ Use HTTPS

Fig. 32: HTTP I/O

Enable send sending events: activate to send event via generic I / O (for example to call the CGIs of the Wisenet NVR).

IP: IP address of the remote I / O.

Port: port on which is listening on the remote I / O.

Path: Path of the remote I / O.

Username: user name to connect to the remote I / O.

Password: Password to connect to the remote I / O.

Parameters: query string with all the required parameters. The format allows to add information about the event. It's necessary to add the following tags to the message

- **event name:** %e
- **device name:** %d
- **sensor name:** %s
- **date:** %t (format DD / MM / YYYY)

Use HTTPS: : if checked, send through HTTPS.

example to set 10 seconds of duration of an alarm on the Hanwha NVR by using Hanwha SUNAPI:

<http://172.16.35.160/stwcgi/io.cgi?msubmenu=alarmoutput&action=set&AlarmOutput.1.IdleState=Normally-Open&AlarmOutput.1.ManualDuration=10s>

Sending event to E-mail

Sending event to E-mail

☒ Enable sending events

Sender

test@site.com

Username:

test@site.com

Password:

SMTP Server

smtp.site.com

SMTP port

587

Recipients:

test@site.com

sec pre-event

0

sec post-event

0

Fig. 33: Sending event to E-mail

Enable send sending events: activate to send event via email.

Sender: e-mail address of the sender.

Username:sender's user name for SMTP server access.

Password: sender's password for SMTP server access.

SMTP Server: address of the SMTP server.

SMTP port: port number of the SMTP server.

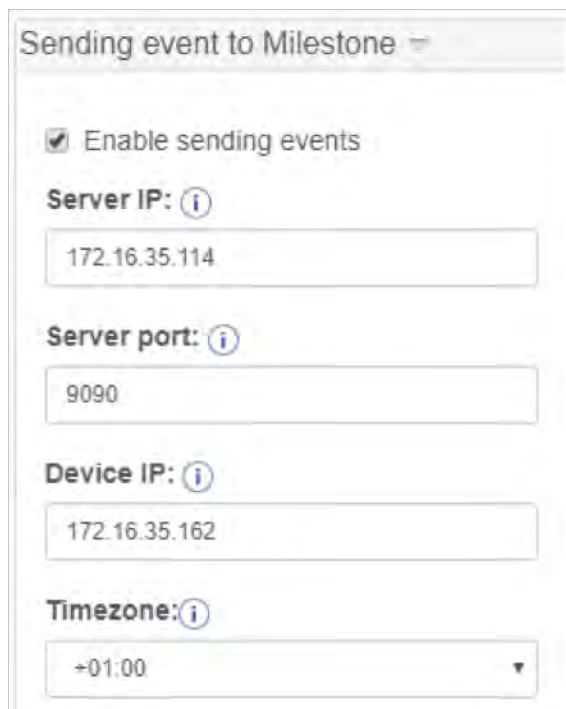
Recipients: You can enter multiple email addresses separated by a semicolon.

Sec pre-event: Number of seconds of images before event.

Sec post-event: Number of seconds of images after event.

The sending of events by e-mail is not supported for Crowd events

Sending event to Milestone



Sending event to Milestone

☒ Enable sending events

Server IP: ⓘ
172.16.35.114

Server port: ⓘ
9090

Device IP: ⓘ
172.16.35.162

Timezone: ⓘ
+01:00 ▼

Fig. 34: Sending event to Milestone

Enable send sending events: activate to send event to Milestone XProtect®

IP server: IP address of the server on which you installed Milestone XProtect®, both server version and a cloud version.

Server port:Port number to listen for Milestone XProtect® events.

IP device: IP address of the device.

Timezone: Timezone of Milestone XProtect® servers.

The sending of events to Milestone XProtect® is not supported for Crowd events.

Sending event to Arteco EVERYWHERE

Sending event to Arteco EVERYWHERE

☒ Enable sending events

IP: i

192.168.1.100

Port: i

80

Username: i

username

Password: i

Output number i

1

Fig. 35: Sending event to Arteco EVERYWHERE

Enable send sending events: activate to send event to Arteco EVERYWHERE.

IP: IP address of the server on which you installed Milestone Arteco EVERYWHERE, both server version and a cloud version.

Server port: Port number to listen for Arteco EVERYWHERE.

Username: Username for login to Arteco EVERYWHERE server.

Password: Password for login to Arteco EVERYWHERE server.

Number of output: Output number associated with the event.

The sending of events to Arteco EVERYWHERE is not supported for Crowd events.

Sending event to Artec NEXT



Fig. 36: Sending event to Artec NEXT

Enable send sending events: activate to send event to Artec NEXT.

IP: IP address of the server on which you installed Milestone Artec NEXT, both server version and a cloud version.

Server port: Port number to listen for Artec NEXT server.

Username: Username for login to Artec NEXT server.

Password: Password for login to Artec NEXTserver.

Connector ID: Identification of the connector defined in Artec NEXT for sending event notifications.

Camera ID: Identification of the connector defined in Artec NEXT for sending event notifications.

Description: Information that will be displayed in Artec NEXT related to the application of video analysis.

The sending of events to Artec NEXT is not supported for Crowd events.

Sending event to Avigilon POS

Avigilon

☒ Enable sending events

Port: ⓘ

38880

Beginning event string ⓘ

START

Ending event string ⓘ

END

Fig. 37: Sending event to Avigilon POS

Enable send sending events: activate to send event to Avigilon POS.

Port: Port number on which the Avigilon server is listening.

Beginning event string: characters at the beginning of the event.

Ending event string: characters at the end of the event.

The sending of events to Avigilon POS is not supported for Crowd events.

Sending event to FTP server

Sending to FTP server

☒ Enable sending events

File name prefix ⓘ

cf

IP: ⓘ

192.168.0.1

Port: ⓘ

21

Username: ⓘ

user

Password: ⓘ

Target Path ⓘ

/Documents/FTP_TEST/

☒ Send images ⓘ

Fig. 38: Sending event to FTP server

Enable send sending events: activate to send event to a FTP server.

IP: IP address of the FTP server.

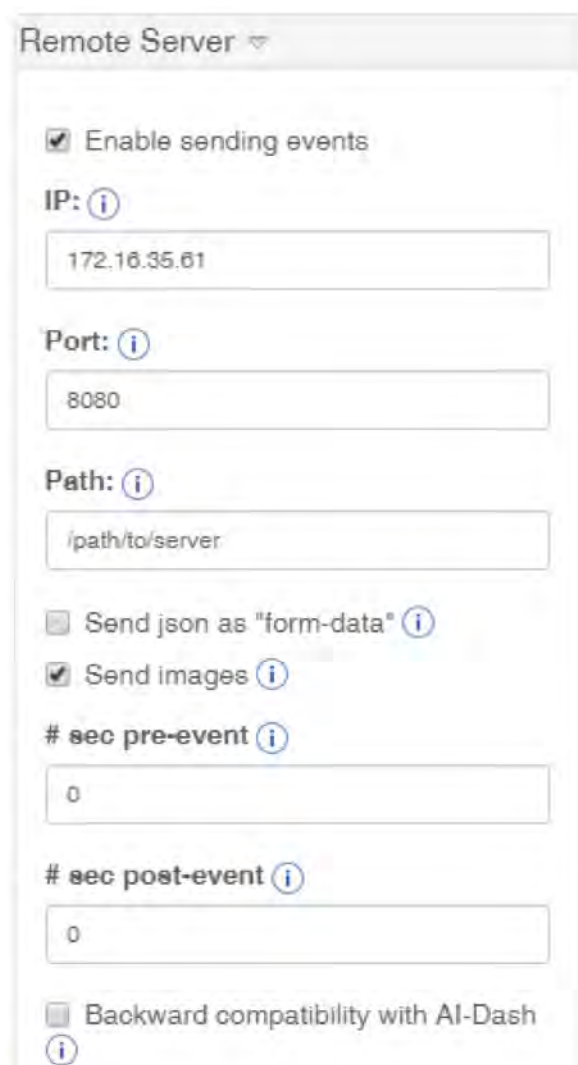
Port: port number of the FTP server.

Username: Username to authenticate to the FTP server.

Password: Password to authenticate to the FTP server.

Path of destination: Path, defined from the root folder, FTP, to transfer the files to the server.

Send images: check to include images in the event sent.

Remote server

Remote Server ▾

☒ Enable sending events

IP: ⓘ
172.16.35.61

Port: ⓘ
8080

Path: ⓘ
/path/to/server

☐ Send json as "form-data" ⓘ

☒ Send images ⓘ

sec pre-event ⓘ
0

sec post-event ⓘ
0

☐ Backward compatibility with AI-Dash ⓘ

Fig. 39: Sending event to Remote server

Enable send sending events: activate to send event to remote server.

IP Server: IP address of the remote server.

Port: port number of the remote server.

Path: Path for the POST to the receiving server.

Send json as “form-data”: Enables url encoding for the message sent.

Send images: check to include images in the event sent.

Sec pre-event: Number of seconds of images before event.

Sec post-event: Number of seconds of images after event.

Backward compatibility with AI-Dash: Enable this field if you want to receive events compliant with AI-Dash and not the new AI-Dash PRO (for more details please refer to the custom server notification in the following).

Input by web request

The event notification triggering through web request event_switch.cgi is available for all applications on all platforms.

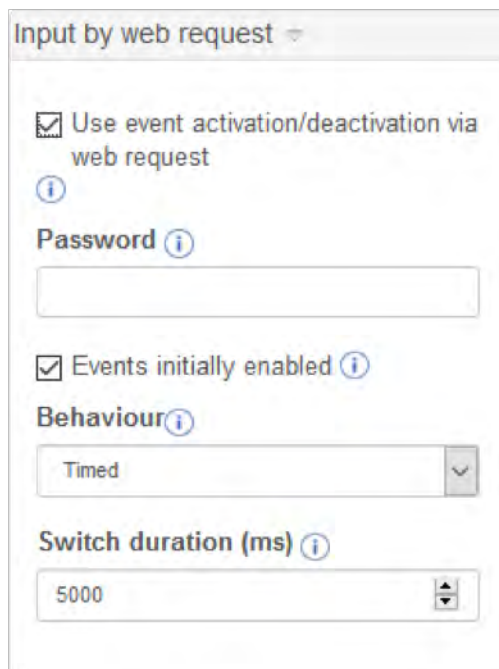


Fig. 40: Input by web request

Use event activation/deactivation via web request: activate to manage the input via web request.

Password: Required to avoid fraudulent activation/deactivation.

Events initially enabled: If enabled, the events are initially activated and in presence of web inputs are inhibited. Otherwise, events are initially inhibited and will be activated in presence of web inputs.

Behaviour: Possible values are: timed or on/off. An on/off input enables/disables the sending of events on the rising edge. A time input enables / disables the sending of events for a certain time interval, specified by the "Switch duration" parameter.

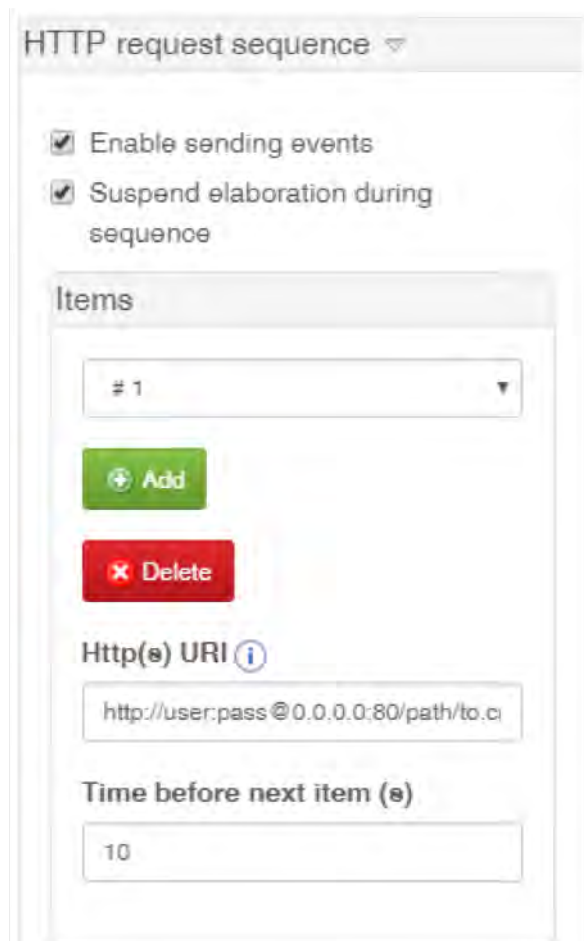
EXAMPLE:

disable events (because they are initially enabled) on a device with ip 192.168.1.1 and password «foo». If the behaviour is Timed, the events will be disabled for Switch duration ms

`http://192.168.1.1:8080/local/AIRetail3/event_switch.cgi?mode=toggle&password=foo`

HTTP request sequence

The plugin also allows to send sequences of HTTP requests, interspersed with a configurable time interval. As an example, you may think to move a PTZ camera on different presets or create your custom sequence to drive remote I/O devices. It is possible to configure an unlimited number of requests in the sequence.



HTTP request sequence ▾

☒ Enable sending events

☒ Suspend elaboration during sequence

Items

1 ▾

+ Add

✖ Delete

Http(s) URI ⓘ

http://user:pass@0.0.0.0:80/path/to.c

Time before next item (s)

10

Fig. 41: Input by web request

Enable sending events: activate end events via HTTP request sequence.

Suspend elaboration during sequence: Enable it to suspend the elaboration during the sequence.

Http(s) URI: The path of the HTTP(s) request.

Time before next item (s): Time interval in seconds to call the next request in the sequence.

Custom server compliant event notification

Custom server compliant with AI-Dash

Events without images: POST with application/json

POST /pathOnServer HTTP/1.1

Accept: application/json

Host: 172.16.35.75:8080

Content-Type: application/json

Content-Length: 157

```
json_data:{"id_source": " people_sensor", "sensor_id": 4, "sensor_name":  
"S1", "event_type": "Counting", "mac_address": "b827ebc42838", "timestamp":  
1510761996, "actual_count": 35, "people_number": 1, "dash_id":  
"Site#Company"}
```

Events with images: POST with custom multipart/x-mixed-replace

POST /pathOnServer HTTP/1.1

Accept: */*

Host: 172.16.35.75:8080

Content-length: 3844500

Content-Type: multipart/x-mixed-replace; boundary=gc0p4Jq0M2Yt08jU534c0p

--gc0p4Jq0M2Yt08jU534c0p

Content-Type: application/json

Content-Length: 157

```
{"id_source": " people_sensor", "sensor_id": 4, "sensor_name": "S1",  
"event_type": "Counting", "mac_address": "b827ebc42838", "timestamp":  
1510761996, "actual_count": 35, "people_number": 1, "dash_id":  
"Site#Company"}
```

--gc0p4Jq0M2Yt08jU534c0p

Content-Type: image/jpeg

Content-length: 11146

JPEG DATA

...

Custom server compliant with AI-Dash PRO

Events without images: POST with application/json

```
POST /pathOnServer HTTP/1.1
```

```
Accept: application/json
```

```
Host: 172.16.35.75:8080
```

```
Content-Type: application/json
```

```
Content-Length: 157
```

```
{"id_source": " people_sensor", "sensor_id": 4, "sensor_name": "S1",  
"event_type": "Counting", "mac_address": "b827ebc42838", "timestamp":  
1510761996, "actual_count": 35, "people_number": 1, "dash_id":  
"Site#Company"}
```

The headers are case insensitive as stated in HTTP standard. The number of images is variable. This value will be different based on images and event size. Note that the transfer encoding is set to chunked: HTTP 1.1 support is required. On the raw socket each chunk will follow a row with the number of bytes and followed by a new row.

See <https://tools.ietf.org/html/rfc7230#section-4.1> for details on chunked encoding.

See https://www.w3.org/Protocols/rfc1341/7_2_Multipart.html for details on multipart/mixed content type.

Events with images: POST with custom multipart/x-mixed-replace

POST /www/prova.php

HTTP/1.1Host: 172.16.35.28:80

Accept:

text/html,application/json,application/xhtml+xml,application/xml;q=0.9,*/*;-q=0.8

User-agent: axia_http_client/2.6.1

Content-Type: multipart/mixed;boundary=gc0p4Jq0M2Yt08jU534c0p

Transfer-encoding: chunked

--gc0p4Jq0M2Yt08jU534c0p

Content-Disposition: form-data;

name="json"

Content-Type: application/json

Content-Length: 157

```
{"id_source": " people_sensor", "sensor_id": 4, "sensor_name": "S1",  
"event_type": "Counting", "mac_address": "b827ebc42838", "timestamp":  
1510761996, "actual_count": 35, "people_number": 1, "dash_id":  
"Site#Company"}
```

--gc0p4Jq0M2Yt08jU534c0p

Content-Disposition: form-data;

name="jpeg"

Content-Type: image/jpeg

Content-length: 60155

BINARY JPEG DATA (60155 bytes total)

--gc0p4Jq0M2Yt08jU534c0p--

Custom server –JSON event format

JSON field	Value type	Description	Type of events
id_source	string	Name of the device, specified in the plugin configuration	All
event_type	string	Type of event. It can assume values: Counting, Aggregate, Crowd, Overcrowd	All
timestamp	string	Value which represents the number of seconds passed since 00:00 of the 1st January 1970 UTC (for instance, a Unix timestamp)	All
sensor_id	integer	Id associated to the sensor which generated the event	All
sensor_name	string	Name associated to the sensor which generated the event	All
mac_address	string	MAC address of the device that generated the event	All
dash_id	string	An identifier of the site and the company, specified in the plugin configuration	All
people_number	integer	For Counting events, represents the number of persons crossing simultaneously the sensor. For Aggregate events, represents the current IN-OUT value. For Crowd and Overcrowd events, represents the number of estimated persons in the sensor.	All
actual_count	integer	For Counting events, represents the total number of persons counted by the sensor since the last reset. For Aggregate events, represents the current IN-OUT value.	Counting, Aggregate
period	integer	For Crowd events, interval between two consecutive events	Crowd

AI-Dash - troubleshooting

In case of low bandwidth (e. g. because of huge network-load or undersized systems) or the camera is overloaded, the live screen may be loading slowly or not to show live. In addition, some browsers may activate filters that block streaming by default (usually Chrome, Firefox and Safari do not have locks).

In these cases:

- Reloading the page and wait for the live image
- Use a different web-browser

If image is displayed is green try to perform the following operations:

- Restart the camera, or alternatively reset to the initial settings (except those related to the application);
- Verify that the latest firmware is installed on the camera
- Contact technical support (see [Support](#), p. 5)

AI-SECURITY

AI-SECURITY is a bundle including three different products, simultaneously installed on board of your camera.

- **AI-INTRUSION:** Intrusion detection in sterile zone and virtual line crossing
- **AI-LOST:** Abandoned or removed objects detection
- **AI-LOITERING:** Loitering detection in forbidden areas

AI-SECURITY - camera positions

- Make sure the size of the target (person, object, animal, vehicle) is at least 10x10 pixels.
- If necessary, the camera should be mounted with external illuminators, to distinguish the targets with natural or artificial illumination.
- The camera should be mounted at a height between 3 and 5 meters
- The precision of the plugins can be reduced if there are occlusions, waving objects, vehicles which project light in interest areas and any other noise that continuously modifies the image

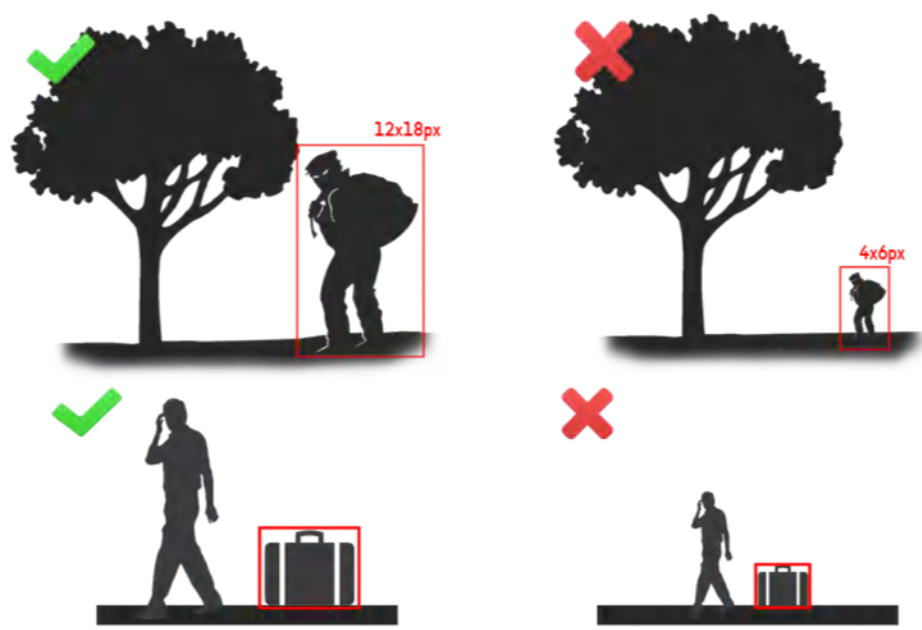


Fig. 42: Camera positions
[Intrusion sensors, p. 63](#)

AI-INTRUSION

AI-INTRUSION is a video analytic app that is able to detect intruders in indoor and outdoor environments; thus, the environmental conditions will affect the performance of the application.

The accuracy to be expected is under ideal environmental and installation conditions

■

 Recall: 95%



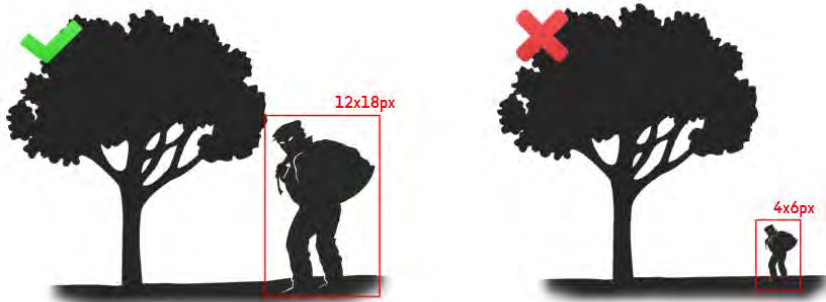
AI-INTRUSION

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- Absence of stationary or slow-moving people for long periods in the counting area (e.g. Sales people that encourage customers to enter).
- There must be no fog, clouds or other moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 1 second.
The target must have a minimum area of 100 pixels.
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

- In case of thermal cameras, the image must be not coloured but in grayscale (white for “hot” pixels, black for “cold” pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.



AI-INTRUSION - target size

Intrusion sensors

Intrusion sensors 

Sensor color



Intrusion sensors  

1 

 Add sensor

 Remove sensor

Redraw the sensor  

ID sensor 

1 

Sensor Name 

S1

Confidence: 

0.75

Inhibition (s): 1 **Latency alarm (s):** 1 **Sensors type**Impulsive **End time intrusion** 1 

Fig. 43: Configuration of AI-INTRUSION Intrusion sensors

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw sensor: Click this button to redraw the current sensor. The current area of interest will be deleted.

ID sensor: define a numeric ID for the sensor.

Sensor name: this name uniquely identifies the main counting sensor (green arrow); is used to generate counting events, sent, for example, to AI-Dash.

Confidence: A small value will make the algorithm very sensitive, instead with a value too large the algorithm could not generate the alarms.

Inhibition (s): Inhibition time in seconds of the sensor after an alarm has been generated. If an alarm is generated by the same sensor before the inhibition time is passed, it will be ignored by the system.

Latency alarm (s): Minimum intrusion time (seconds of permanence in the area of interest) before an alarm is generated. Time in seconds. Subjects who stay in the area of interest for less time than the set latency, won't generate any alarm.

Sensor type: there are two types of sensors:

- **Impulsive:** generates a single event for the whole duration of the intrusion.
- **Levels:** generates several types of event: beginning of the intrusion, intrusion continuation (every "Inhibition" seconds) and end of intrusion.

End time intrusion: after this amount of seconds, if none is in the level sensor, an event of "end of intrusion" will be sent.

Crossing the line

Crossing the line

Sensor color



Crossing line sensors

1 

 Add sensor

 Remove sensor

Redraw the sensor  


ID sensor 

2 

Sensor Name 

S2

Crossing line pre confidenza 


0.1

Crossing line post confidence 


0.5

Crossing line pre-latency 

1 

Crossing line post latency 

1 

Fig. 44: Configuration of AI-INTRUSION Crossing line sensors

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw sensor: Click this button to redraw the current sensor. The current area of interest will be deleted.

ID sensor: define a numeric ID for the sensor.

Sensor name: this name uniquely identifies the sensor, it is used to generate events to be sent for example to AI-Dash.

Crossing line pre confidence: confidence relative to the object before it crosses the line (pre alarm).

Crossing line post confidence: confidence relative to the activation of the alarm (crossing the line) on a object already considered in a pre-alarm state.

Crossing line pre latency: time of latency of an object that is in the scene before it crosses the line (pre-alarm). Time in seconds.

Crossing line post latency: time of latency of an object already considered in pre-alarm state that it spends in the scene after it crosses the line. Time in seconds.

Multiple crossing lines

A multiple crossing line sensor is an aggregate sensor inside the scene consisting of a set of crossing lines (see [Crossing the line, p. 66](#)). If the subject crosses all the lines specified in the scene, the alarm will be generated.

Multiple crossing lines

Sensor color

Multiple crossing line sensors

1

Add aggregate sensor

Delete aggregate sensor

Crossing line sensors

Add sensor

Remove sensor

ID sensor

3

Sensor Name

S3

Crossing Time (s)

5

Crossing line pre confidence

0.5

Crossing line post confidence

0.1

Crossing line pre-latency

0

Crossing line post latency

0

Fig. 45: Configuration of AI-INTRUSION - Multiple crossing line sensors

The configuration section provides the following functions:

Add aggregate sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest is a polygon with no limits to the number of sides. The aggregate sensor can contain multiple crossing lines.

Remove aggregate sensor: Click this button to remove the selected aggregate sensor from the configuration.

ID sensor: define a numeric ID for the aggregate sensor.

Sensor name: this name uniquely identifies the aggregate sensor, it is used to generate events to be sent for example to AI-Dash.

Crossing time (s): maximum crossing time in seconds between two successive crossing lines.

It is required to add crossing line sensors within the aggregate sensor (See [Crossing the line, p. 66](#)).

AI-LOITERING

AI-LOITERING is a video analytic app that is able to detect loitering in indoor and outdoor environments; thus, the environmental conditions will affect the performance of the application, FTP servers and third party servers.

The accuracy to be expected is under ideal environmental and installation conditions

- Recall: 95%



Fig. 46: AI-LOITERING: configuration

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 5 seconds.
- The target must have a minimum area of 100 pixels.
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

- In case of thermal cameras, the image must be not coloured but in grayscale (white for “hot” pixels, black for “cold” pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

Installation constraints

A camera that can be used to detect loitering with AI-LOITERING must comply with the following installation restrictions (in addition to the respect of the environmental conditions):

- It must be installed in such a way that the framed targets (people, vehicles, animals) have a minimum area of 100 pixels.
- If necessary, it must be installed with external illuminators that make it possible to distinguish the targets in all natural or artificial lighting conditions.

Configuration of AI-LOITERING sensors

Loitering sensors ▾

Sensor color

Loitering sensors ⓘ ▾

1 ▾

Add sensor

Remove sensor

Redraw the sensor ✎ ⓘ

ID sensor ⓘ
2 ▾

Sensor Name ⓘ
S2

Confidence: ⓘ
0.75

Inhibition (s): ⓘ
30 ▾

Latency alarm (s): ⓘ
10 ▾

Fig. 47: Configuration of AI-LOITERING sensors

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw the sensor: Click to delete the current sensor and draw a new one.

ID sensor: define an ID number for the sensor.

Sensor name: this name uniquely identifies the sensor.

Confidence: A small value will make the algorithm very sensitive, instead with a value too large the algorithm could not generate the alarms.

Inhibition (s): Inhibition time in seconds of the sensor after an alarm has been generated. If an alarm is generated by the same sensor before the inhibition time is passed, it will be ignored by the system.

Latency alarm (s): Minimum intrusion time (seconds of permanence in the area of interest) before an alarm is generate. Time in seconds. Subjects who stay in the area of interest for less time than the set latency, won't generate any alarm.

AI-LOST

AI-LOST is a video analytic app that is able to detect abandoned or removed objects in indoor and outdoor environments; thus, the environmental conditions will affect the performance of the application.

The accuracy to be expected is under ideal environmental and installation conditions

- Recall: 90%

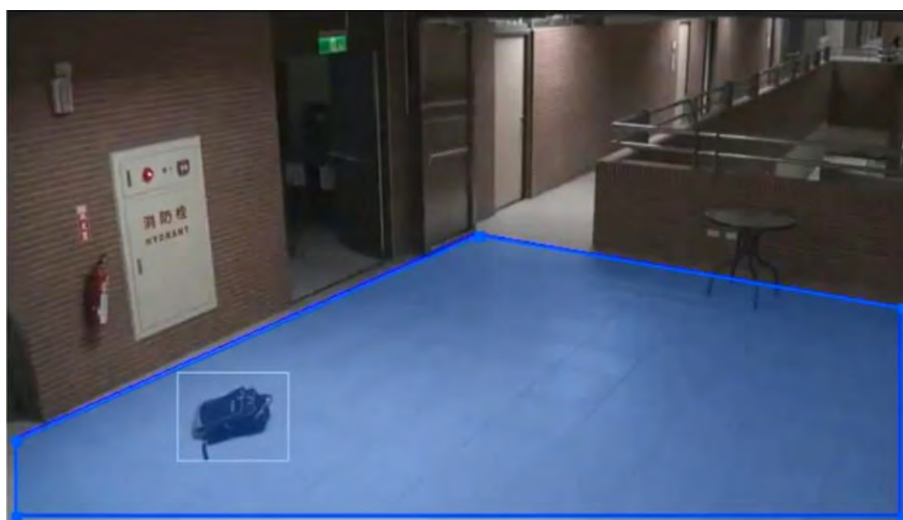



Fig. 48: AI-LOST: configuration

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 5 seconds.
- The target must have a minimum area of 100 pixels.
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

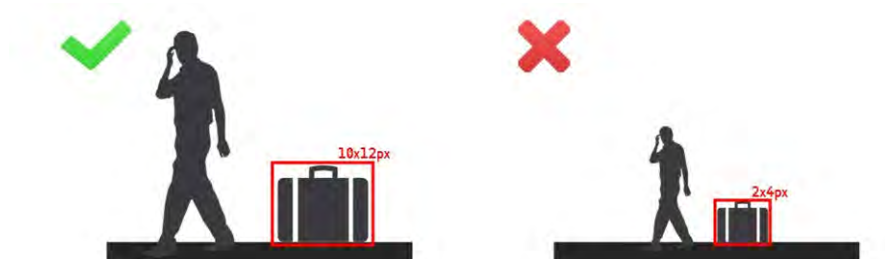- In case of thermal cameras, the image must be not coloured but in grayscale (white for “hot” pixels, black for “cold” pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.



AI-LOST - target size

Installation constraints

A camera that can be used to detect loitering with AI-LOITERING must comply with the following installation restrictions (in addition to the respect of the environmental conditions):

- It must be installed in such a way that the framed targets (people, vehicles, animals) have a minimum area of 100 pixels.
- If necessary, it must be installed with external illuminators that make it possible to distinguish the targets in all natural or artificial lighting conditions.

Configuration of AI-LOST sensors

Lost sensors ▾

Sensor color

☒ Enable detection of abandoned or removed objects

Lost sensors ⓘ ▾

1 ▾

➕ Add sensor

✖ Remove sensor

Redraw the sensor ✎ ⓘ

ID sensor ⓘ

1 ▾

Sensor Name ⓘ

S1

Confidence: ⓘ

0.75

Inhibition (s): ⓘ

30 ▾

Latency alarm (s): ⓘ

30 ▾

Fig. 49: Configuration of AI-LOST sensors

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw the sensor: Click to delete the current sensor and draw a new one.

ID sensor: define an ID number for the sensor.

Sensor name: this name uniquely identifies the sensor.

Confidence: A small value will make the algorithm very sensitive, instead with a value too large the algorithm could not generate the alarms.

Inhibition (s): Inhibition time in seconds of the sensor after an alarm has been generated. If an alarm is generated by the same sensor before the inhibition time is passed, it will be ignored by the system.

Latency alarm (s): Minimum intrusion time (seconds of permanence in the area of interest) before an alarm is generate. Time in seconds. Subjects who stay in the area of interest for less time than the set latency, won't generate any alarm.

Configuration of AI-LOST Entrance areas

In order to reduce the number of false positives and to consider only the objects which enters from specific parts of the image, it is possible to draw an unlimited number of entrance areas.

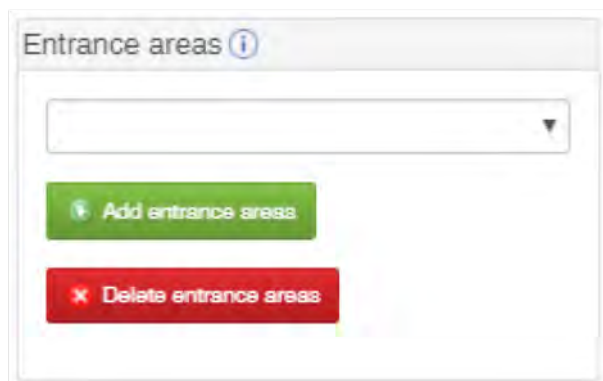


Fig. 50: Configuration of AI-LOST entrance areas

The configuration section provides the following functions:

Add entrance area: Click this button to draw an entrance area of directly on the live image on the left. The entrance area is a polygon with no limits to the number of sides.

Delete entrance area: Click this button to remove the selected entrance area from the configuration.

AI-RETAIL3

AI-RETAIL3 is a bundle including three different products, simultaneously installed on board of your camera.

- **AI-PEOPLE:** People counting through gates
- **AI-CROWD:** Crowd estimation
- **AI-OVERCROWD:** Overcrowding detection for queue management

AI-RETAIL - camera positions

- The camera should be mounted with a reduced focal length and an horizontal field of view in the range between 60° and 120°, chosen with respect to the gate.
- The camera must be mounted in a overhead position considering an 90° angle measured to ground.
- The camera should be mounted at a height between 3 and 5 meters
- The precision of the plugins is maximum when people are recorded from the top without distorsion on the sides

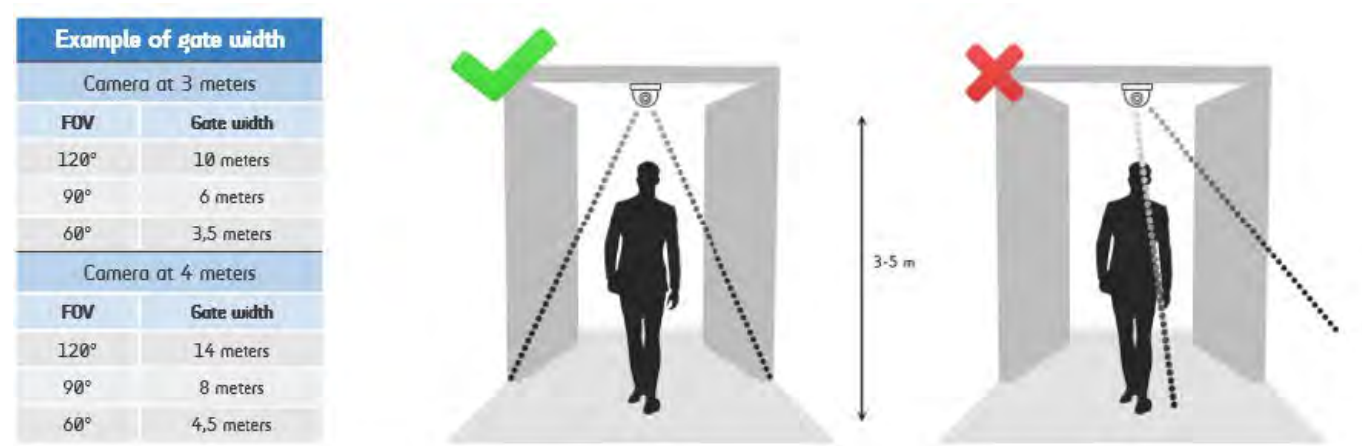


Fig. 51: camera position

Recomended distances

Camera height (m)	Maximum gate width (m)
3	6
3,5	7,5
4	9
4,5	10
5	12

AI-PEOPLE

AI-PEOPLE is a video analytic plugin optimized to count people crossing a gate in typical retail scenarios. It generates events that can be managed by all the notification channels.

The accuracy to be expected is under ideal environmental and installation conditions

Indoor:

- Recall: 85%
- Precision: 95%

Outdoor:

- Recall: 85%
- Precision: 85%

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- Absence of stationary or slow-moving people for long periods in the counting area (e.g. Sales people that encourage customers to enter).
- There must be no other moving objects whose appearance is similar to the people in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The people must have a minimum area of 600 pixels (e.g. 20x30, 15x40, ...).
- The floor must be a predominantly non-reflective surface.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

Drawing the people counting sensor

When drawing the counting sensor the following 3 guidelines must be considered:

- **Correct width:** It must occupy the entire area of the gate horizontally
- **Correct height:** The vertical half of the sensor should include head and shoulders
- **Correct position:** the sensor must be parallel to the gate, so that people crossing it from top to bottom or viceversa, and must not include moving objects in its area (doors, sliding or not, screens etc.)

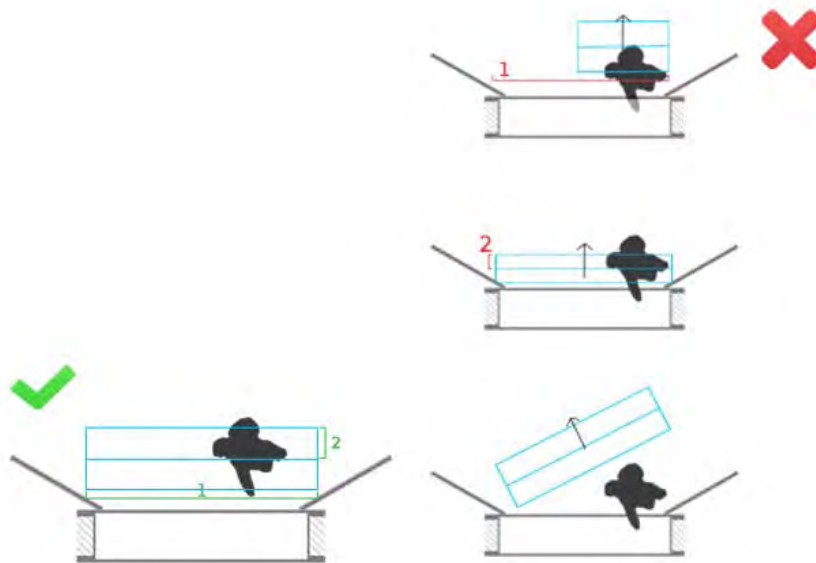


Fig. 52: Examples of correct and wrong sensor drawing

Configuring people counting

Counting

☐ Reset counters

Sensor color

Counting

1

+ Add sensor

x Remove sensor

Redraw the sensor

Real width (m)

2

☒ Bidirectional

ID sensor

4

Sensor ID (reverse direction)

5

Sensor Name

S1

Sensor Name (reverse direction)

S2

Sensor's activation threshold:

0.2

Aggregate counting

☐ Enable aggregate counting

Fig. 53: Configuration of AI-PEOPLE

The configuration section provides the following functions:

Reset counters: when checked the counters associated to the counting sensors will be reset when the application is restarted.

Add Sensor: Click this button to draw a virtual sensor with the mouse method “click and drag”. The sensor can be moved and changed in its size, by dragging the nodes. You can direct the sensor (the counting direction is given by the arrow), for example rotating the sensor until the arrow points to the desired direction, or specify if the sensor is monodirectional rather than bidirectional .

Remove sensor: Click this button to remove the selected sensor from the configuration.

Real width (m): real width of the sensor in meters. The empirical rule to specify this value, used when the real dimension is not measurable, suggests to compute the maximum number of people who can cross the gate at the same time multiplied for 0.75. However, it approximates the real condition and may not be precise enough.

Bidirectional: specify if the sensor is mono or bidirectional.

Sensor name: this name uniquely identifies the main counting sensor (green arrow); is used to generate counting events, sent, for example, to AI-Dash.

Sensor name (reverse direction): this name uniquely identifies the counting sensor in the reverse direction (red arrow); is used to generate counting events, sent, for example, to AI-Dash;

Sensor activation threshold: A value too small ($< 0,1$) would make the sensor very sensitive and the sensor could give false positive in this case. A value too big ($> 0,6$) would make the sensor not very sensitive and in this case, the sensor could miss some person crossing.

After checking **Enable aggregate counting**, it's possible to send the events if the difference between entrances and exits is over a certain threshold (see [AI-PEOPLE: Aggregate counting, p. 88](#)).

AI-PEOPLE: Aggregate counting

Configuring aggregate counting

Before configuring aggregate counting make sure the basic [AI-PEOPLE, p. 82](#) is ready configured.

Aggregate counting ⓘ ▾

☒ Enable aggregate counting ⓘ

ID sensor ⓘ

10

Sensor Name ⓘ

agg

Threshold ⓘ

100

Sensors to aggregate ⓘ ▾

1 ▾

+ Add sensor

✖ Remove sensor

Aggregate sensor ⓘ ▾

Sensor type ⓘ ▾

IN ▾

Fig. 54: Aggregate counting

After checking **Enable aggregate counting**, it's possible to send the events if the difference between entrances and exits is over a certain threshold

The following parameters are to be configured to use this functionality:

ID sensor: univocal ID automatically generated;

Sensor name: this name uniquely identifies the aggregate sensor; is used to generate counting events, sent, for example, to AI-Dash;

Threshold: The event will be generated when the difference between entries and exits will be above this value (threshold).

In section **Sensors to aggregate** you can add the desired number of sensors which will form the aggregate sensor:

Aggregate sensor: drop down menu that permit to select the name of the sensor just created in the section “Counting” (BE AWARE: if you created a Bidirectional sensor, in the section “Counting”, the generated sensors will be two with the respective name and identifier);

Sensor type: specifies if the selected sensor in the previous drop down menu counts entries (IN) or exits (OUT).

AI-CROWD

AI-CROWD is the plugin that can be used in crowded areas where persons can stop or move slowly, even determining queueing situations. It allows to estimate the number of persons inside one or more areas of interest. It generates events that can be managed by AI-Dash, FTP servers and third party servers.

The accuracy to be expected is 90% under ideal environmental and installation conditions.

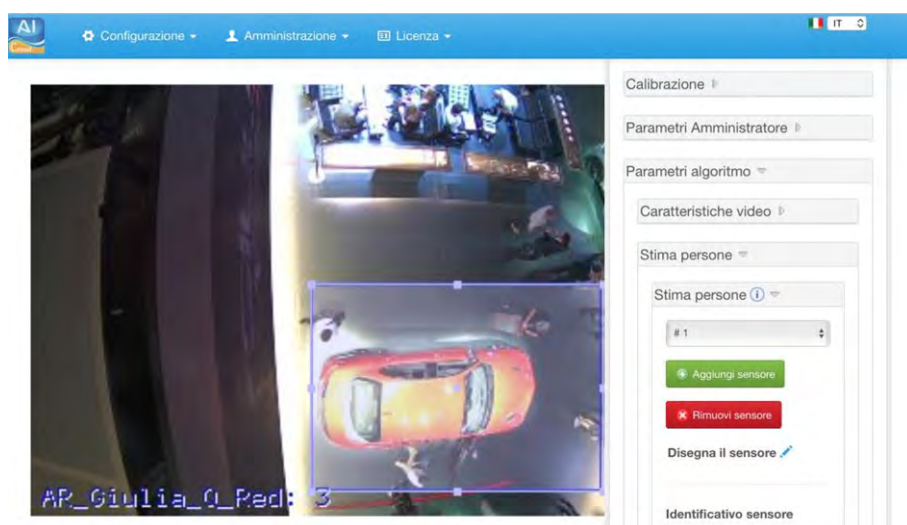


Fig. 55: AI-CROWD: configuration

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- Absence of stationary or slow-moving people for long periods in the counting area (e.g. Sales people that encourage customers to enter).
- There must be no other moving objects whose appearance is similar to the people in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The people must have a minimum area of 200 pixels (e.g. 10x20, 5x40, ...).
- The floor must be a predominantly non-reflective surface.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

Drawing the sensor for AI-CROWD

When drawing the crowd estimation sensor consider the following guideline:

- Configure the minimum area occupied by a person by drawing a rectangle around the shoulders.

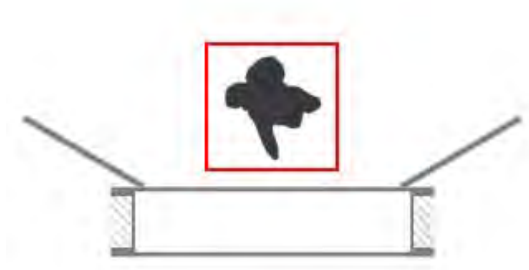


Fig. 56: Drawing sensor for AI-CROWD

Configuration of AI-CROWD

Crowd ▾

Crowd ⓘ ▾

1 ▾

+ Add sensor

✖ Remove sensor

Redraw the sensor ✎

ID sensor

11 ▴ ▾

Sensor Name

S3

Events period (s): ⓘ

60 ▴ ▾

Relative person area:

0,099113 ▴ ▾ ✎

☒ Enable crowd estimation ⓘ

Fig. 57: Configuration of AI-CROWD

The configuration section provides the following functions:

Add Sensor: Click this button to draw a virtual sensor with the mouse method “click and drag”. The sensor can be moved and changed in its size, by dragging the nodes. You can direct the sensor (the counting direction is given by the arrow), for example rotating the sensor until the arrow points to the desired direction, or specify if the sensor is monodirectional rather than bidirectional .

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw the sensor: Click to delete the current sensor and draw a new one.

ID sensor: define an ID number for the sensor.

Sensor name: this name uniquely identifies the main counting sensor (green arrow); is used to generate counting events, sent, for example, to AI-Dash.

Event period(s): interval in seconds between two consecutive events that need to be sent to an external server.

Enable crowd estimation: check to activate AI-CROWD.

AI-OVERCROWD

AI-OVERCROWD is a video analytic app that can be used to detect overcrowding inside one or more areas of interest in typical retail scenarios; of course, the position of the camera and the environmental conditions will affect the performance of the application.

The accuracy to be expected is 90% under ideal environmental and installation conditions.



Fig. 58: AI-OVERCROWD

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- Absence of stationary or slow-moving people for long periods in the counting area (e.g. Sales people that encourage customers to enter).
- There must be no other moving objects whose appearance is similar to the people in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The people must have a minimum area of 200 pixels (e.g. 10x20, 5x40, ...).
- The floor must be a predominantly non-reflective surface.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

Drawing the sensor for AI-OVERCROWD


When drawing the crowd estimation sensor consider the following guideline:

- Configure the minimum area occupied by a person by drawing a rectangle around the shoulders.



Fig. 59: Drawing sensor for AI-CROWD

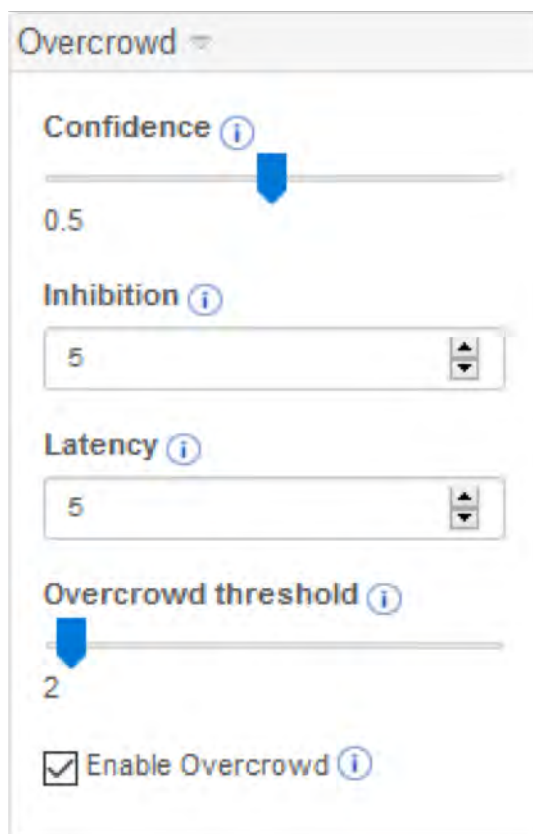Configuration of AI-OVERCROWD



Overcrowd

Confidence ⓘ

0.5

Inhibition ⓘ

5

Latency ⓘ

5

Overcrowd threshold ⓘ

2

☒ Enable Overcrowd ⓘ

Fig. 60: Configuration of AI-OVERCROWD

The configuration section provides the following functions:

Confidence: A small value ($< 0,5$) will make the algorithm very sensitive, instead with a value too large ($> 0,8$) the algorithm could not generate the alarms. It's suggested to use a value between 0,5 and 0,75.

Inhibition(s): inhibition time of the sensor in seconds after an alarm has been generated. If an alarm is generated by the same sensor before the inhibition time is passed, will be ignored by the system.

Latency(s): Minimum crowding time in seconds (number of people over the configured threshold) before an alarm is generate.

Overcrowd threshold: If the number of the persons in the region of interest exceeds the selected threshold, the application creates a new overcrowd event.

AI-TRAFFIC

AI-TRAFFIC is a bundle including three different products, simultaneously installed on board of your camera.

- **AI-ROAD 3D:** gathering of traffic statistics
- **AI-INCIDENT:** road monitoring for security purposes

Configuration of AI-TRAFFIC analysis

Traffic analysis ⓘ

1 ▾

Add sensor

Remove sensor

Redraw the sensor ✎

ID sensor ⓘ

6

Sensor Name ⓘ

S6

☒ Enable vehicle counting and classification ⓘ

☐ Enable high speed limit control ⓘ

☐ Enable traffic density monitoring ⓘ

☐ Enable congestion control ⓘ

☐ Enable wrong way control ⓘ

Fig. 61: Configuration of AI-LOST sensors

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw the sensor: Click to delete the current sensor and draw a new one.

ID sensor: define an ID number for the sensor.

Sensor name: this name uniquely identifies the sensor.

Enable vehicle counting and classification: It is enabled by default and allows to count and classify vehicles, collecting also information about the average speed and color of each vehicle. Available in AI-ROAD 3D.

Enable high speed limit control: Allows to send a notification for each vehicle which overcome the speed limit, specified during the configuration. Available in AI-ROAD 3D.

Enable traffic density monitoring: Allows to send a periodical notification, with a period specified during the configuration, along with the information about the traffic density. Available in AI-ROAD 3D.

Enable congestion control: Allows to send a notification in case of congestion. Available in AI-INCIDENT.

Enable wrong way control: Allows to send a notification for each vehicle which crosses the sensor in the wrong direction. Available in AI-INCIDENT.

AI-TRAFFIC- stopped vehicle or pedestrian

Stopped vehicle or pedestrian ⓘ

1 ▾

+

Add sensor

×

Remove sensor

Redraw the sensor  ⓘ

ID sensor ⓘ

5

Sensor Name ⓘ

S5

☐ Enable pedestrians detection ⓘ

☐ Enable stopped vehicles detection ⓘ

Latency (s) ⓘ

5

Fig. 62: Configuration of AI-TRAFFIC stopped vehicle or pedestrian

The configuration section provides the following functions:

Add Sensor: Click this button to draw the area of interest directly on the live image on the left. The area of interest it's a polygon with no limits to the number of sides.

Remove sensor: Click this button to remove the selected sensor from the configuration.

Redraw the sensor: Click to delete the current sensor and draw a new one.

ID sensor: define an ID number for the sensor.

Sensor name: this name uniquely identifies the sensor.

Enable pedestrians detection: It is enabled by default and allows to count and classify vehicles, collecting also information about the average speed and color of each vehicle. Available in AI-INCIDENT.

Enable stopped vehicles detection: Allows to send a notification if a pedestrian spends more than "Latency" seconds in the sensor. Available in AI-ROAD 3D.

Enable traffic density monitoring: Allows to send a periodical notification, with a period specified during the configuration, along with the information about the traffic density. Available in AI-ROAD 3D.

Latency (s): Define a latency value in seconds.

Configuration of AI-TRAFFIC Entrance areas

In order to reduce the number of false positives and to consider only the objects which enters from specific parts of the image, it is possible to draw an unlimited number of entrance areas.

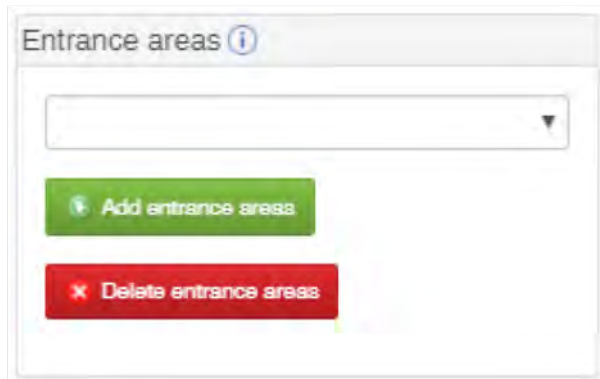


Fig. 63: Configuration of AI-TRAFFIC entrance areas

The configuration section provides the following functions:

Add entrance area: Click this button to draw an entrance area of directly on the live image on the left. The entrance area is a polygon with no limits to the number of sides.

Delete entrance area: Click this button to remove the selected entrance area from the configuration.

AI-TRAFFIC - camera positions

- The camera must be mounted in order to assure that the maximum angle between it and the road is 30°.
- The camera should frame the vehicles from behind, so as to avoid the negative effect of the headlights.
- The camera should be varifocal for outdoor environments.
- The camera must be installed on a pole or, more in general, in a place completely steady; otherwise, the camera vibrations can have a negative impact on the performance.
- The camera must be mounted at a minimum height of 5 meters; in any case, it is important to avoid occlusions between vehicles.
- The camera must be mounted with a minimum inclination angle of 15°; in any case, it is important to avoid occlusions between vehicles.
- The minimum area in pixels of a vehicle must be 50x50; the zoom must be configured according to this constrain.

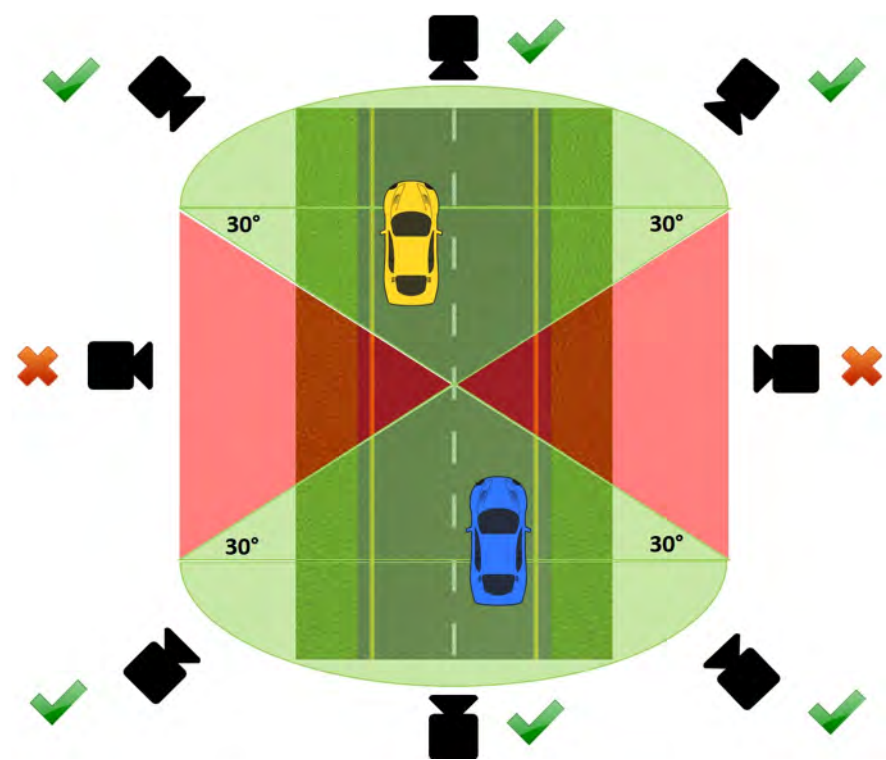


Fig. 64: AI-TRAFFIC Camera positions 1

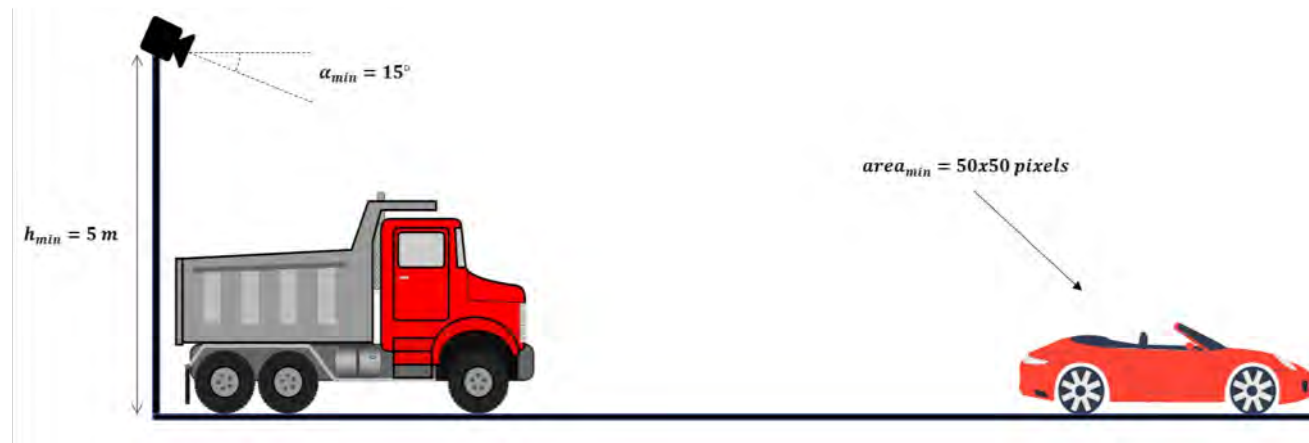


Fig. 65: AI-TRAFFIC Camera positions 2

AI-ROAD 3D

AI-ROAD 3D is a video analytic app optimized to monitor the road traffic in real-time; thus, the environmental conditions will affect the performance of the application.

The accuracy to be expected is under ideal environmental and installation conditions

Vehicle Detection:

- Recall: 90%
- Precision: 95%

Vehicle Classification:

- Motorcycle Accuracy: 75%
- Car Accuracy: 95%
- Truck Accuracy: 85%

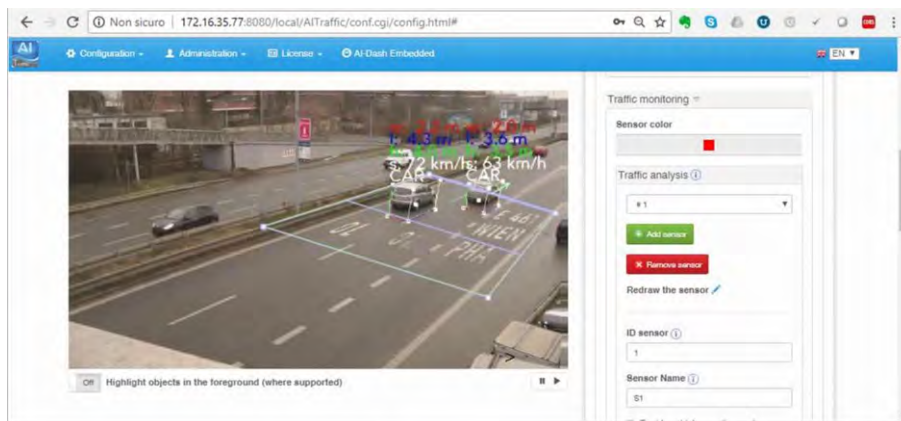


Fig. 66: AI-ROAD 3D: configuration

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding).
- Absence of vehicles with lights projected towards the camera.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the target in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- Absence of vehicles with lights projected in areas of interest.
- The target must stay in the interested area for a time of at least 1 second.
- The target must have a minimum area of 2500 pixels (e.g. 50x50).
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- In case of thermal cameras, the image must be not coloured but in grayscale (white for "hot" pixels, black for "cold" pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

Drawing the people counting sensor

When drawing the counting sensor the following guidelines must be considered:

- Sensors can be configured only on straight roads
- Sensors can be configured only on roads or lanes oriented in the same direction of the reference lines, not in different ones

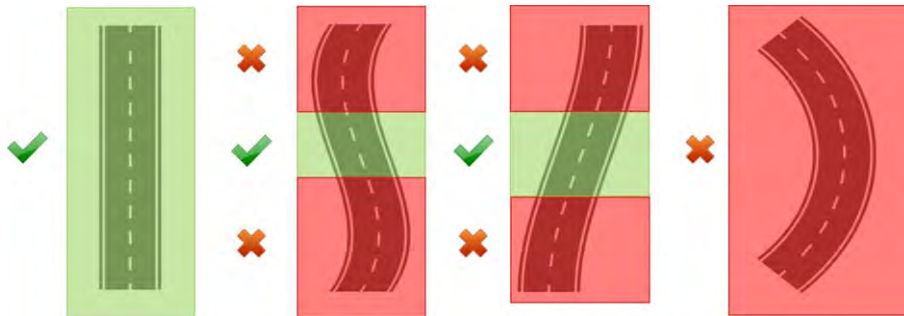


Fig. 67: AI-ROAD 3D Sensor drawing

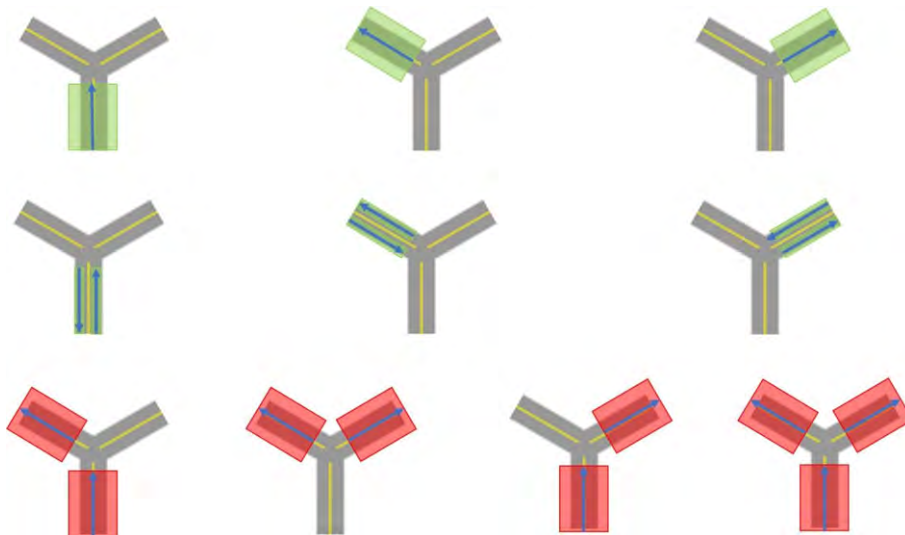


Fig. 68: AI-ROAD 3D Lane direction

AI-ROAD 3D - 3D Calibration

The 3D calibration is a procedure mandatory to enable the functionalities available in AI-Traffic. Since it is a crucial step of the configuration, it has been designed to be very easy for the user. All the parameters regarding the calibration are in the tabs “Calibration” and “3D calibration”.

IMPORTANT: set the real height of the camera (with respect to the road) in meters; an error on the configuration of this field negatively affects the results of the calibration procedure.

Then, the procedure includes the following three steps:

Step 1: Drawing of parallel lines along the road

Step 2: Drawing of parallel lines vertical (**Case A**) or crossroad (**Case B**)

Step 3: Configuration of camera parameters (**Case A**) or drawing of a reference line (**Case B**)

it may be comfortable to pause the video stream to simplify the configuration.

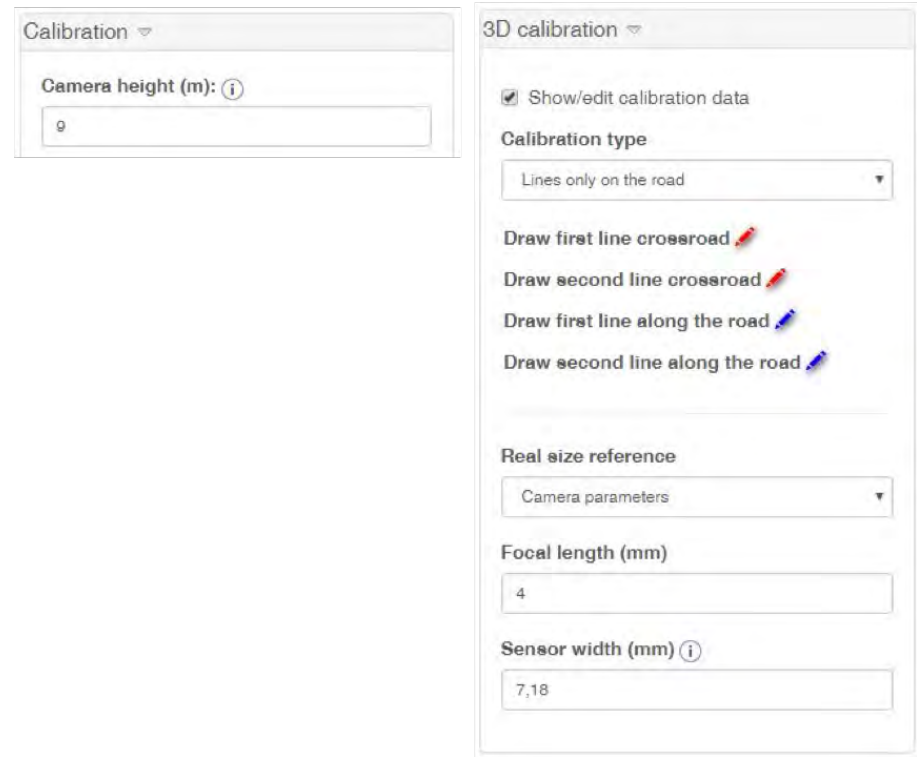


Fig. 69: 3D Calibration for AI-ROAD 3D

AI-ROAD 3D: 3D calibration – Step 1

Draw the parallel lines along the road (blue)




Fig. 70: Draw lines along the road

As shown in the image below, you can use the boundary lines of the carriageway or any other line parallel to the motion direction.

Be careful that the lines are drawn with accuracy, since an error in this step may negatively affect the results of the calibration.



Fig. 71: Draw parallel lines to define the road

AI-ROAD 3D: 3D calibration – Step 2 - Case A

Draw the parallel vertical lines (green)

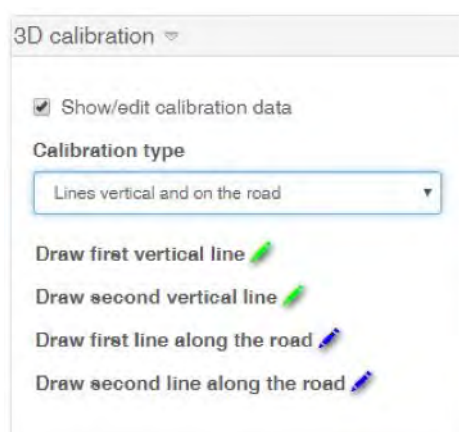


Fig. 72: Draw vertical lines for calibration

As shown in the image below, if there are vertical parallel lines (e.g. street lamps, buildings) you can use them to perform the step 2 of the calibration.

Be careful that the lines are drawn with accuracy, since an error in this step may negatively affect the results of the calibration.



Fig. 73: Draw vertical lines to define the road

AI-ROAD 3D: 3D calibration – Step 2 - Case B

Draw the parallel lines crossroad (red)

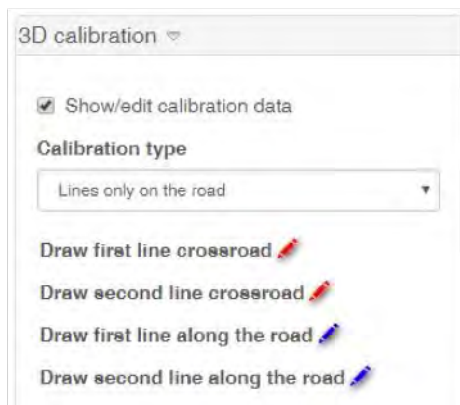


Fig. 74: Draw crossroad lines for calibration

In some cases are no vertical parallel lines available in the scene; thus, the plugin must provide an alternative way to complete the calibration. As shown in the image on the right, in this case you can use parallel lines crossroad to perform the step 2 of the calibration. The easier way is to pause the video stream and to use the back of two vehicles as a reference; of course, if crossroad lines are available, it is better to use them.

Be careful that the lines are drawn with accuracy, since an error in this step may negatively affect the results of the calibration.



Fig. 75: Draw crossroad lines to define the road

AI-ROAD 3D: 3D calibration – Step 3 - Case A

This way to perform the calibration is the most accurate but it requires some attempts to find the right value of the focal length. Therefore [AI-ROAD 3D: 3D calibration – Step 3 - Case B, p. 112](#) might be more comfortable.

Provide the camera lens parameters

Real size reference

Camera parameters ▼

Focal length (mm)

4

Sensor width (mm) ⓘ

7,18

Fig. 76: Provide the camera lens parameters

Focal length: this value normally is provided on the cameras datasheet as a range between the minimum and the maximum focal length (e.g. 5.2-62.4 mm. For varifocal cameras the specific value depends on the zoom. Therefore, it is necessary to make a few attempts until you can find the right value in the.

Sensor width: This value can be obtained from the cameras datasheet and is given as a fraction of inches (e.g. 1/1.8" is 7.18 mm)

A table for the conversion in millimeters is available here: https://en.wikipedia.org/wiki/Image_sensor_format.

AI-ROAD 3D: 3D calibration – Step 3 - Case B

This way to perform the calibration is the most comfortable but [AI-ROAD 3D: 3D calibration – Step 3 - Case A, p. 111](#) in general is more accurate.

Draw a reference line (yellow) and give a reference length

Real size reference

Reference line with known size ▼

Draw reference line on the road 

Length reference line (m) ⓘ

3,8

Fig. 77: Draw a reference line (yellow) and give a reference length

As shown in the image below, you can draw a reference line parallel to the motion direction and give the real length in meters of the line

Be careful that the lines are drawn with accuracy, since an error in this step may negatively affect the results of the calibration.

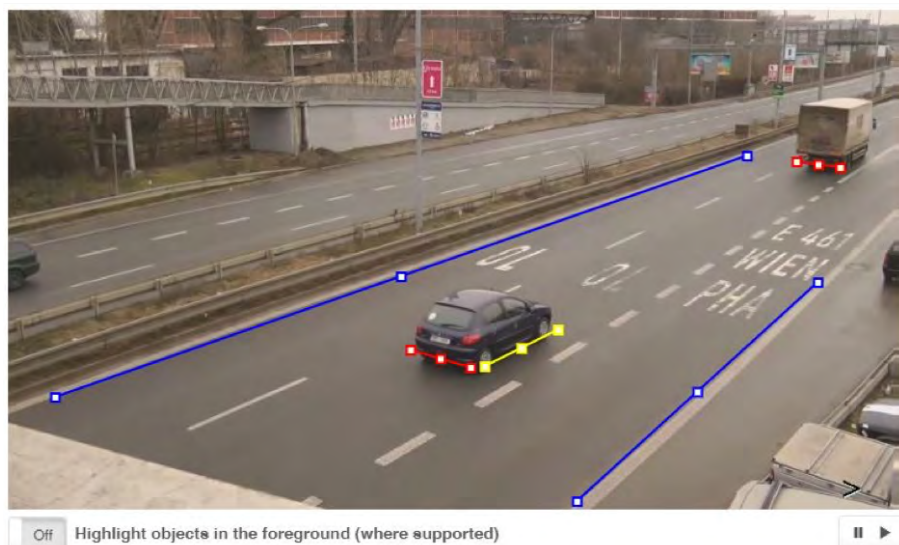


Fig. 78: Draw a reference line (yellow) and give a reference length

AI-ROAD 3D: 3D calibration examples

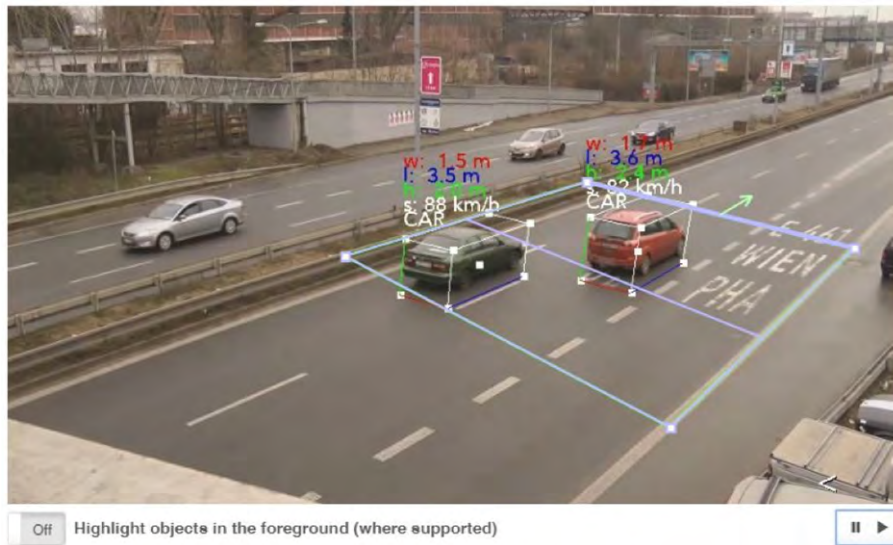


Fig. 79: AI-ROAD 3D calibration example 1

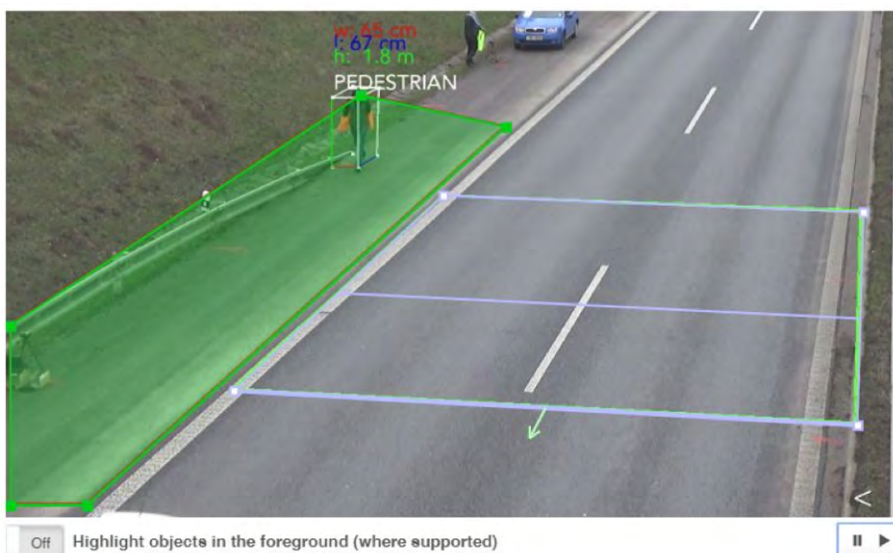


Fig. 80: AI-ROAD 3D calibration example 2

AI-ROAD 3D: 3D - troubleshooting

The considerations reported below allow to solve calibration issues only if the camera height is correct and all reference lines have been configured correctly. Otherwise it is necessary to rectify the configuration of these items.

Underestimation of values

Underestimation of the length, the width and the speed of the vehicle are typically due to an underestimation of the focal length. In this case **increase the value of the focal length**, remaining in the range reported on the camera datasheet.

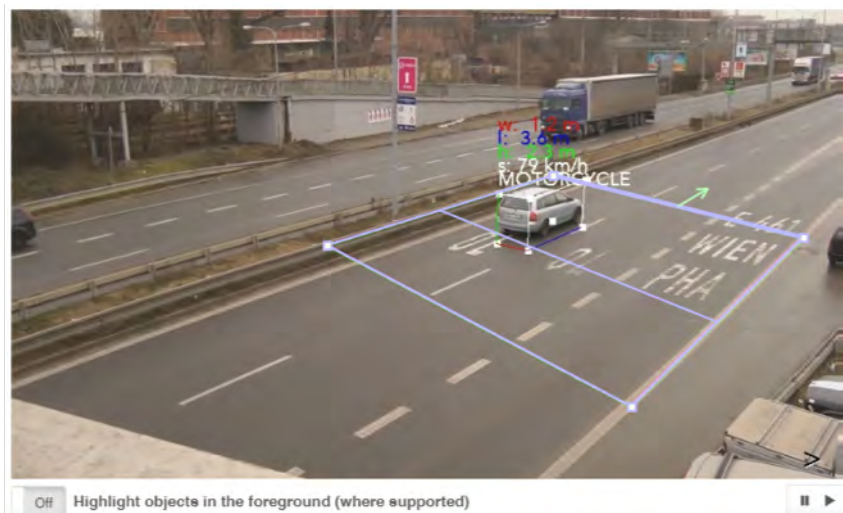


Fig. 81: AI-ROAD 3D underestimation of values

Overestimation of values

Overestimation of the length, the width and the speed of the vehicle are typically due to an overestimation of the focal length. In this case **decrease the value of the focal length**, remaining in the range reported on the camera datasheet.

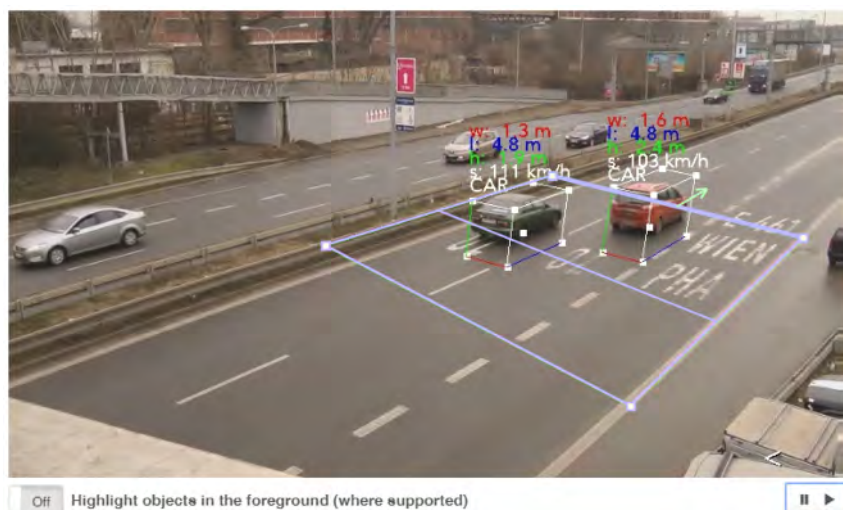


Fig. 82: AI-ROAD 3D overestimation of values

AI-INCIDENT

AI-INCIDENT is a video analytic for monitoring the road traffic in real-time; thus, the environmental conditions will affect the performance of the application. It is able to detect the presence of pedestrians, stopped vehicles, queuing or vehicles crossing a road in the wrong direction. It generates events that can be managed by all the notification channels.

The accuracy to be expected is under ideal environmental and installation conditions

- Recall: 90%
- Precision: 95%

In our experiments, a vehicle crossing the road in the wrong way, a stopped vehicle, a pedestrian or a queue correctly detected by AI-Incident is considered a true positive; viceversa, it is a false negative. On the other hand, all these real events not detected by the algorithm are false positives.



Fig. 83: AI-INCIDENT: configuration

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 1 second.
- A vehicle must have a minimum area of 2500 pixels (e.g. 50x50), while a pedestrian must have a minimum area of 600 pixels (e.g. 15x40)s.
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

- In case of thermal cameras, the image must be not coloured but in grayscale (white for “hot” pixels, black for “cold” pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

Installation constraints

A camera usable for traffic monitoring with AI-INCIDENT must be installed as defined in [AI-TRAFFIC - camera positions, p. 103](#).

AI-PARKING

AI-PARKING is the video analysis solution for monitoring parking areas, perimeter and non-perimeter. It assesses whether a parking spot is free or occupied. It needs information about the color, so a thermal camera is not suitable for this plugin. It generates events that can be managed by all the notification channels.

AI-PARKING - camera positions

A camera usable for traffic monitoring with AI-ROAD 3D (see [AI-ROAD 3D](#), p. 104) must respect the following constraints:

1. The portion of each parking spot, without any occlusion due to other vehicles, must have minimum dimensions of 30x30px.



Fig. 84: AI-PARKING - Configuration of parking spots

AI-PARKING

The performance to be expected is under ideal environmental and installation conditions

Parking Spot (busy or free):

- Accuracy: 85%

Parking Lot (number of spots correctly classified):

- Accuracy: 90%

Live



AI-PARKING

Environment conditions

AI-PARKING is a video analytic app for monitoring outdoor parking areas; thus, the environmental conditions will affect the performance of the application:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 10 seconds.
- The target, or a piece of it, must have a minimum area of 900 pixels (e.g. 30x30) without occlusions.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- The camera must be always configured in order to avoid continuous changes of brightness.

Required configuration

AI-PARKING must be configured according to the following guidelines:

1. Draw a square sensor for each parking spot, being careful that every area can not be occluded by vehicles parked in different spots.
2. Specify the confidence, the latency and the inhibition for the detection of parked vehicles.
3. Configure at least one event manager to collect the events.
4. If needed, schedule the applications in specific time intervals.



Example of AI-PARKING output

AI-BIO

AI-BIO is an app for recognizing the gender and estimating the age of a person by analyzing the face. The plugins also provides information about the persistence time of an individual in front of the camera and it is able to send notifications useful for digital signage. It generates events that can be managed by all the notification channels.

AI-BIO - camera positions

- Install the camera in front of the person at a recommended height of 1.8 m.
- Install the camera in a place that attracts the glance of the person, in order to obtain a frontal view of the face.
- Install the camera at a distance that allows to obtain the face on the image with an horizontal resolution at least of 30 pixels.
- Install the camera with a good lighting in order to obtain well visible facial landmarks

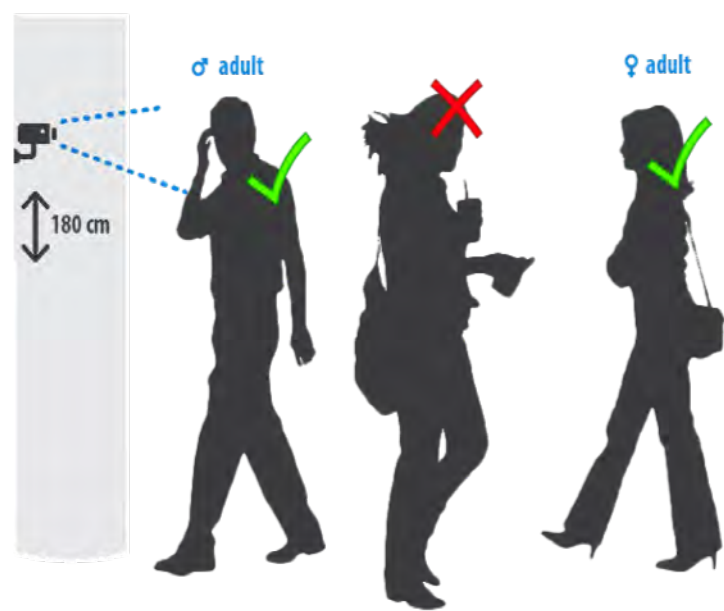


Fig. 85: Camera position

Recommended distances

Distance (cm)	Real width (cm)	Pixels/cm	Face width (cm)
100	140,0	2,3	37
200	280,1	1,1	18
300	420,1	0,8	12
400	560,2	0,6	9
500	700,2	0,5	7
600	840,2	0,4	6
700	980,3	0,3	5
800	1120,3	0,3	5
900	1260,4	0,3	4
1000	1400,4	0,2	4

AI-BIO

AI-BIO is an app for recognizing the gender and estimating the age of a person by analyzing the face. The plugins also provides information about the persistence time of an individual in front of the camera and it is able to send notifications useful for digital signage. It generates events that can be managed by all the notification channels.

AI-BIO is a video analytic app optimized to analyze the faces in typical retail scenarios; of course, the position of the camera and the environmental conditions will affect the performance of the application.

The performance to be expected is under ideal environmental and installation conditions

Gender recognition:

- Accuracy: 90%

Age estimation:

- MAE (Mean Average Error): 10 years
- Accuracy (age groups child, young, adult, elder): 80%

Environment conditions

The position of the camera and the environmental conditions affect the performance of the application. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x180, 320x240.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- Absence of stationary or slow-moving people for long periods in the counting area (e.g. Sales people that encourage customers to enter).
- There must be no other moving objects whose appearance is similar to the people in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of vehicles with lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The people must have a minimum area of 600 pixels (e.g. 20x30, 15x40, ...).
- The floor must be a predominantly non-reflective surface.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

AI-OCCUPANCY

AI-OCCUPANCY is the video analysis app for the determination of the occupancy percentage of one or more areas inside the scene, thus allowing to distinguish between the most visited areas (hot spots) and the less crowded ones (dead areas) in indoor and outdoor environments. It generates periodic events that can be managed by AI-Dash, AI-Dashboard embedded, FTP servers and Third-Party servers. It can be used also with thermal cameras.

AI-OCCUPANCY - camera positions

A camera that can be used to determine the occupancy percentage using AI-OCCUPANCY must respect the following constraints:

- Make sure the size of the targets (people, vehicles, animals) have a minimum area of 100 pixels.
- If necessary, the camera should be mounted with external illuminators, to distinguish the targets with natural or artificial illumination.

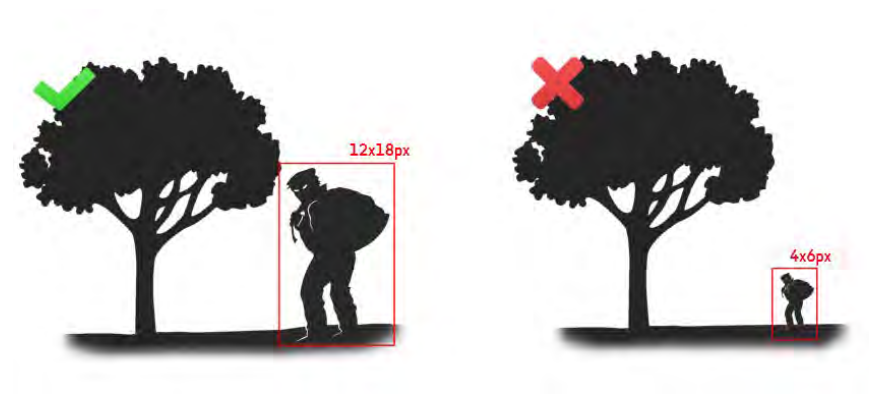


Fig. 86: Camera positions

AI-OCCUPANCY



AI-OCCUPANCY

Environment conditions

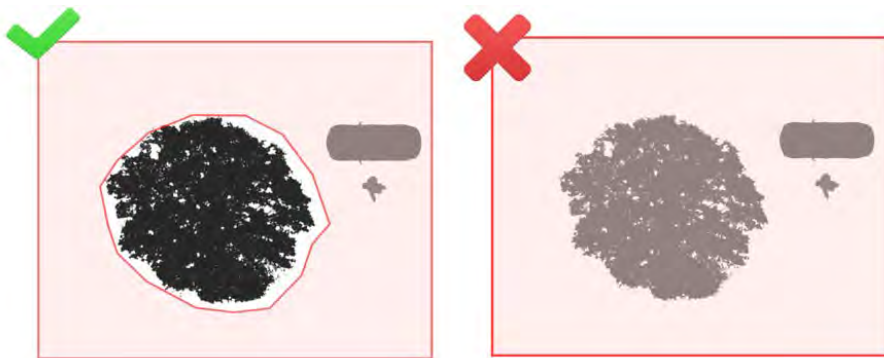
AI-OCCUPANCY is a video analytic app for monitoring outdoor parking areas; thus, the environmental conditions will affect the performance of the application:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x240, 320x180.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- In case of thermal cameras, the image must be not coloured but in grayscale (white for "hot" pixels, black for "cold" pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

Required configuration

AI-OCCUPANCY must be configured according to the following guidelines:

1. Draw a sensor.
2. Configure the sensors so as to include only "walkable" areas, namely those areas of the image where people, objects or animals may be present. The presence of inanimate objects in the areas of interest, in fact, causes an inevitable underestimation of the occupancy percentage.
3. Configuration of the observation period (please consult the manual for further information).
4. IConfigure the parameters for background updating, for the application of the morphological operators, for detecting brightness changes and for removing shadows, in order to detect the objects of interest.



Example of correct and wrong sensor positioning

AI-OVEROCCUPANCY

AI-OVEROCCUPANCY is the video analysis app for the detection of overoccupancy in one or more areas inside the scene in indoor and outdoor environments. It generates events that can be managed by all the event notifiers. It can be used also with thermal cameras.

AI-OVEROCCUPANCY - camera positions

A camera that can be used to determine the occupancy percentage using AI-OVEROCCUPANCY must respect the following constraints:

- Make sure the size of the targets (people, vehicles, animals) have a minimum area of 100 pixels.
- If necessary, the camera should be mounted with external illuminators, to distinguish the targets with natural or artificial illumination.


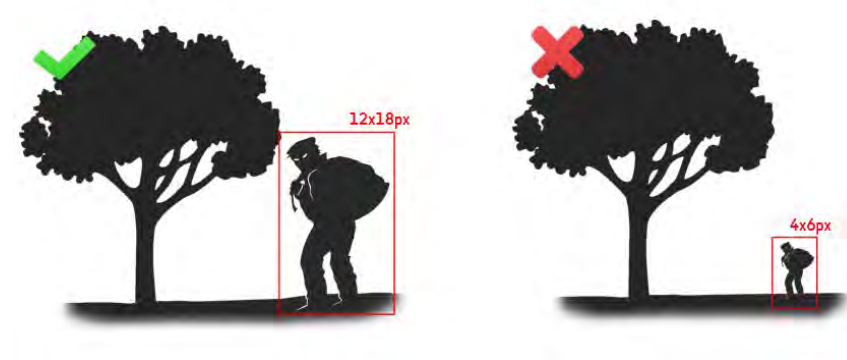


Fig. 87: Camera positions

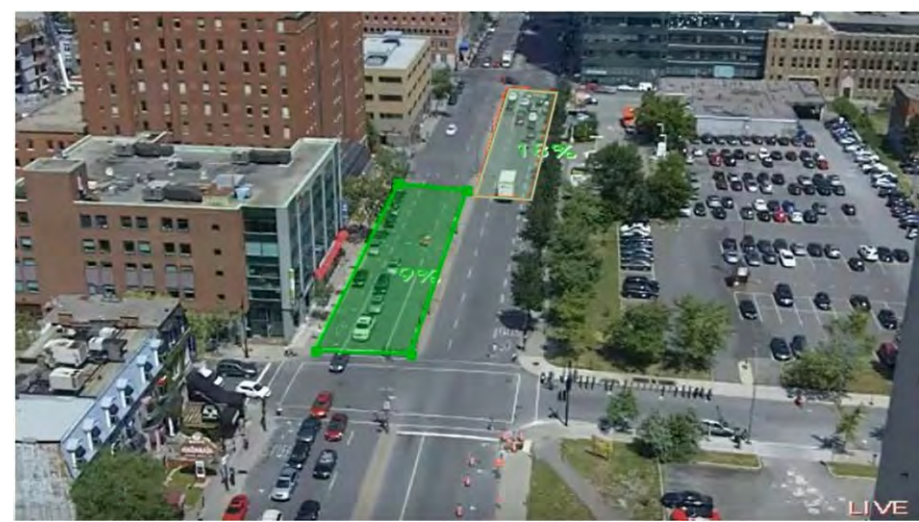AI-OVEROCCUPANCY



AI-OVEROCCUPANCY

Environment conditions

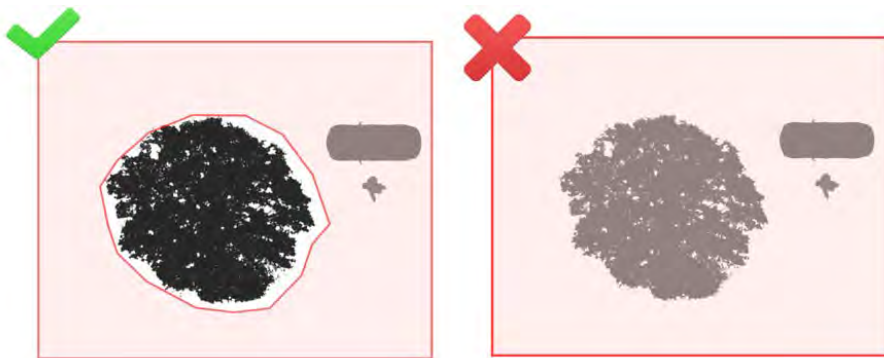
AI-OVEROCCUPANCY is a video analytic app for monitoring outdoor parking areas; thus, the environmental conditions will affect the performance of the application:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x240, 320x180.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- In case of thermal cameras, the image must be not coloured but in grayscale (white for "hot" pixels, black for "cold" pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

Required configuration

AI-OVEROCCUPANCY must be configured according to the following guidelines:

1. Draw a sensor.
2. Configure the sensors so as to include only "walkable" areas, namely those areas of the image where people, objects or animals may be present. The presence of inanimate objects in the areas of interest, in fact, causes an inevitable underestimation of the occupancy percentage.
3. Configuration of the observation period (please consult the manual for further information).
4. IConfigure the parameters for background updating, for the application of the morphological operators, for detecting brightness changes and for removing shadows, in order to detect the objects of interest.




Example of correct and wrong sensor positioning

AI-HEAT

AI-HEAT is an app for classifying the areas depending on the time spent by moving people inside the areas of interest, thus allowing to distinguish between the most visited areas (hot spots) and the less crowded ones (dead areas).in indoor and outdoor environments. It generates periodic heat maps that can be managed by AI-Dash and AI-Dash Embedded. It can be used also with thermal and fisheye cameras.

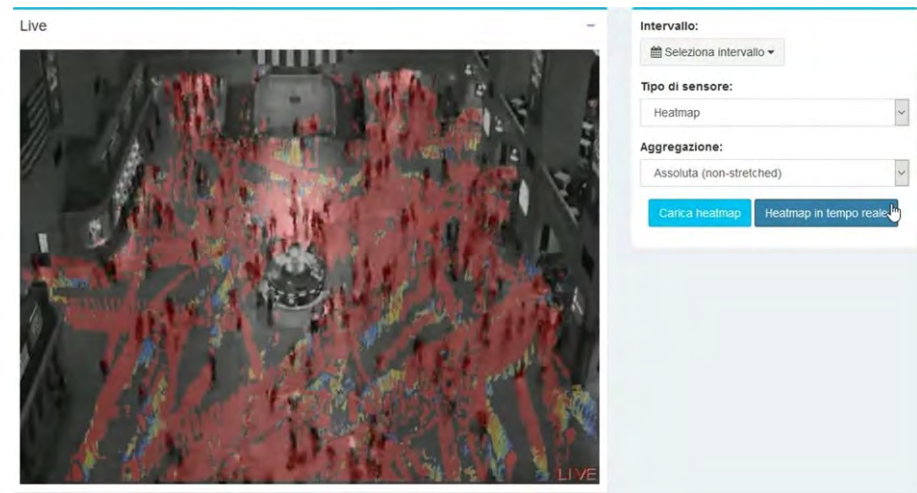AI-HEAT



AI-HEAT

Environment conditions

AI-HEAT is a video analytic plugin able to compute the heat map in indoor and outdoor environments. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x240, 320x180.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The target must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the target is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- In case of thermal cameras, the image must be not coloured but in grayscale (white for "hot" pixels, black for "cold" pixels). The camera, thermal or monocular, must be always configured in order to avoid continuous changes of brightness.

If necessary, the camera must be installed with external illuminators that make it possible to distinguish the targets in all natural or artificial lighting conditions.

Required configuration

AI-HEAT must be configured according to the following guidelines:

1. Draw non interest areas, so as to exclude regions in constant motion (screen, cash and so on).
2. Configuration of the time interval between consecutive events.
3. Configuration of the heating and cooling time.
4. Configure the parameters for background updating, for the application of the morphological operators, for detecting brightness changes and for removing shadows, in order to detect the objects of interest.

AI-SPILL

AI-SPILL is an app for detecting falls in indoor environments like hospitals or apartments. It generates events that can be managed by all the notification channels. Since the plugin uses information about the color, thermal cameras are not allowed.

AI-SPILL

The performance to be expected is under ideal environmental and installation conditions

- Recall: 90%

Environment conditions

AI-Spill is a video analytic plugin able to detect falls in indoor environments. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360, 640x480, 320x240, 320x180.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must not be moving objects whose appearance is similar to the target in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The people must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the people are similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The target must stay in the interested area for a time of at least 5 seconds.
- The target must have a minimum area of 600 pixels (e.g. 15x40).
- The target must move at a maximum speed of half their width on the image per frame. For example, a target that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The floor must be a predominantly non-reflective surface.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.
- The camera must be always configured in order to avoid continuous changes of brightness.

Required configurations

AI-SPILL must be configured according to the following guidelines:

1. Draw a sensor
2. If you want to avoid multiple alarms for the same event, increase the inhibition time
3. Configure the entrance areas so as to consider only the objects that pass through specific areas of the image
4. Configure the minimum and maximum pixel size of an object of interest
5. Calibrate the camera by correctly specifying height, horizontal angle of view and vertical angle of view
6. Calibrate the algorithm by correctly specifying the inclination angle of the camera and the training samples
7. Configure the parameters for background updating, for the application of the morphological operators, for detecting brightness changes and for removing shadows, in order to detect the objects of interest
8. Configure at least one event manager to collect the events
9. If needed, schedule the applications in specific time intervals

AI-SMOKE

AI-SMOKE is an app for the detection of smoke in outdoor environments, such as urban forests, parks and so on. It generates events that can be managed by all the notification channels. It uses information about the color, so it cannot be used with thermal cameras; for the same reason, the performance may decrease during the night.

AI-SMOKE

The video-wise performance to be expected is under ideal environmental and installation conditions

- Recall: 95%
- Precision: 75%

Video-wise means that a smoke detected in a video in which there is smoke is considered a true positive; viceversa, a smoke not detected it is considered a false negative. On the other hand, a smoke detected in a video where there is not a smoke is considered a false positive; viceversa, a smoke not detected is considered a true negative.

Recall and Precision have been computed following this experimental protocol.



AI-SMOKE

Environment conditions

AI-SMOKE is a video analytic plugin able to detect falls in indoor environments. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360 or 640x480.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The smoke must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the smoke is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The smoke must stay in the interested area for a time of at least 5 seconds.
- The smoke must have a minimum area of 600 pixels (15% of the cell of the grid).
- The smoke must move at a maximum speed of half their width on the image per frame. For example, a smoke that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

Required configuration

AI-SMOKE must be configured according to the following guidelines:

1. Draw a sensor and configure a latency time of at least 5 seconds.
2. If you want to avoid multiple alarms for the same smoke, increase the inhibition time.
3. Enable the flag “Verify smoke”.
4. Configure the movement threshold (recommended value 0.15) and the classification sensitivity (recommended value 0.85).
5. Configure the parameters for background updating, for the application of the morphological operators, the RGB threshold (recommended value 18) and the saturation threshold (recommended value 51) to detect moving objects like smoke.
6. Configure at least one event manager to collect the events.
7. If needed, schedule the applications in specific time intervals

AI-FIRE

AI-FIRE is an app for the detection of flames in outdoor environments, such as urban forests, parks and so on. It generates events that can be managed by all the notification channels. It uses information about the color, so it cannot be used with thermal cameras; for the same reason, the performance may decrease during the night.

AI-FIRE

The video wise performance to be expected is under ideal environmental and installation conditions

- Recall: 95%
- Precision: 80%

Video-wise means that a flame detected in a video in which there is flame is considered a true positive; viceversa, a flame not detected it is considered a false negative. On the other hand, a flame detected in a video where there is not a flame is considered a false positive; viceversa, a flame not detected is considered a true negative.

Recall and Precision have been computed following this experimental protocol.



Environment conditions

AI-Spill is a video analytic plugin able to detect falls in indoor environments. Performance is best under the following conditions:

- The image must not present flickering, severe noise or artifacts.
- Image must have a resolution of 640x360 or 640x480.
- Rotating (PTZ) security cameras are supported only if they are not moved when the application is enabled. If the camera is moved, the application must be reconfigured.
- Absence of occlusions (E. g. Trees, pillars, buildings, furniture elements etc.) that do not allow to see the people.
- Absence of conditions of high crowding or stopped people that do not allow to count the individuals.
- There must be no fog, clouds or other moving objects whose appearance is similar to the smoke (e.g. white powder raised by the wind) in the areas of interest.
- Camera lens must not be dirty, wet or covered in rain or water drops. Camera lens must not be steamy.
- Absence of "waving objects" (e.g. Meadow with tall grass, trees, sliding doors, etc.) or any other type of disturbance that causes the continuous modification of the images (moving pixels) in the areas of interest.
- Camera placement must be stable and solid in a way that wind or external disturbances of other types will cause movement of the camera that appears on the image.
- Absence of strong lights (e. g. vehicle lights) projected in areas of interest.
- Correct exposition of the camera: camera must not be in backlight, the framed area must not have heterogeneous illumination, i.e. partially indoor or partially outdoor. In general, no areas to be monitored must be almost white or almost black, i.e. the dynamic range must be sufficient to correctly show detail of objects in the image. If necessary, the camera must be installed with external illuminators that make it possible to distinguish the people in all natural or artificial lighting conditions.
- The smoke must have a sufficient dissimilarity from the background, i.e. there is no explicit camouflage, where the smoke is similar to the background in color and texture. Sufficient dissimilarity means at least a color difference of at least 5% or a brightness difference of at least 10%.
- The smoke must stay in the interested area for a time of at least 5 seconds.
- The smoke must have a minimum area of 600 pixels (15% of the cell of the grid).
- The smoke must move at a maximum speed of half their width on the image per frame. For example, a smoke that is 40 pixels wide at 10 frames per second must move at a speed of no more than 20 pixels per frame, that is 200 pixel per second.
- The scene must be predominantly non-reflective.
- No hard lights must be present that cast shadows in a way that the background brightness is reduced to less than 50% of the original value in the image.

Required configuration

AI-FIRE must be configured according to the following guidelines:

1. Draw a sensor and configure a latency time of at least 5 seconds.
2. If you want to avoid multiple alarms for the same smoke, increase the inhibition time.
3. Enable the flag “Verify fire”.
4. Configure the verification sensitivity (recommended value 0.85).
5. Configure the parameters for background updating, for the application of the morphological operators, and the fire detection threshold (recommended value 40) to detect moving objects like flames.
6. Configure the minimum and the maximum size in pixels of a flame.
7. if you are framing a scene with an extended depth of field, calibrate the camera and the algorithm and configure the minimum and maximum real size of a flame.
8. Configure at least one event manager to collect the events.
9. If needed, schedule the applications in specific time intervals.

List of figures

Fig. 1: Sequence of events	12
Fig. 2: Graphic	12
Fig. 3: Overview of the dashboard	13
Fig. 4: Menu configuration	13
Fig. 5: Menu Administration	14
Fig. 6: Highlight objects in foreground	15
Fig. 7: Scheduler	17
Fig. 8: Administrator login with password	17
Fig. 9: AI-BIO Face detection	18
Fig. 10: Gaussian filtering	19
Fig. 11: Background	20
Fig. 12: Example background extraction using a threshold for each of the three YUV channels.	20
Fig. 13: Morphological filtering	21
Fig. 14: Object tracking	22
Fig. 15: Tracking (AI-BIO and AI-SECURITY only)	22
Fig. 16: Small objects filtering (AI-SECURITY only)	23
Fig. 17: Filtering actual size (AI-SECURITY only)	24
Fig. 18: Camera Calibration (AI-SECURITY only)	25
Fig. 19: Algorithm calibration (AI-SECURITY only)	26
Fig. 20: Shadow removal (AI-SECURITY only)	27

List of figures

Fig. 21: Brightness control	28
Fig. 22: Performance	29
Fig. 23: Blob detection (AI-SECURITY) only	29
Fig. 24: Stream	30
Fig. 25: Images saving options	33
Fig. 26: Embedded AI-Dash	34
Fig. 27: External AI-Dash	35
Fig. 28: Wisenet WAVE	36
Fig. 29: Hanwha SSM	37
Fig. 30: Text sender configuration	38
Fig. 31: Digital output	39
Fig. 32: HTTP I/O	40
Fig. 33: Sending event to E-mail	42
Fig. 34: Sending event to Milestone	43
Fig. 35: Sending event to Artec EVERYWHERE	44
Fig. 36: Sending event to Artec NEXT	45
Fig. 37: Sending event to Avigilon POS	46
Fig. 38: Sending event to FTP server	47
Fig. 39: Sending event to Remote server	48
Fig. 40: Input by web request	49
Fig. 41: Input by web request	50
Fig. 42: Camera positions	60
Fig. 43: Configuration of AI-INTRUSION Intrusion sensors	65
Fig. 44: Configuration of AI-INTRUSION Crossing line sensors	68
Fig. 45: Configuration of AI-INTRUSION - Multiple crossing line sensors	71
Fig. 46: AI-LOITERING: configuration	71
Fig. 47: Configuration of AI-LOITERING sensors	74
Fig. 48: AI-LOST: configuration	75
Fig. 49: Configuration of AI-LOST sensors	78
Fig. 50: Configuration of AI-LOST entrance areas	79
Fig. 51: camera position	82
Fig. 52: Examples of correct and wrong sensor drawing	84
Fig. 53: Configuration of AI-PEOPLE	87
Fig. 54: Aggregate counting	89
Fig. 55: AI-CROWD: configuration	90
Fig. 56: Drawing sensor for AI-CROWD	92
Fig. 57: Configuration of AI-CROWD	95
Fig. 58: AI-OVERCROWD	95
Fig. 59: Drawing sensor for AI-CROWD	97
Fig. 60: Configuration of AI-OVERCROWD	98
Fig. 61: Configuration of AI-LOST sensors	100
Fig. 62: Configuration of AI-TRAFFIC stopped vehicle or pedestrian	102

Fig. 63: Configuration of AI-TRAFFIC entrance areas	103
Fig. 64: AI-TRAFFIC Camera positions 1	104
Fig. 65: AI-TRAFFIC Camera positions 2	104
Fig. 66: AI-ROAD 3D: configuration	105
Fig. 67: AI-ROAD 3D Sensor drawing	107
Fig. 68: AI-ROAD 3D Lane direction	107
Fig. 69: 3D Calibration for AI-ROAD 3D	108
Fig. 70: Draw lines along the road	109
Fig. 71: Draw parallell lines to define the road	109
Fig. 72: Draw vertical lines for calibration	109
Fig. 73: Draw vertical lines to define the road	110
Fig. 74: Draw crossroad lines for calibration	110
Fig. 75: Draw crossroad lines to define the road	111
Fig. 76: Provide the camera lens parameters	111
Fig. 77: Draw a reference line (yellow) and give a reference length	112
Fig. 78: Draw a reference line (yellow) and give a reference length	112
Fig. 79: AI-ROAD 3D calibration example 1	113
Fig. 80: AI-ROAD 3D calibration example 2	113
Fig. 81: AI-ROAD 3D underestimation of values	114
Fig. 82: AI-ROAD 3D overestimation of values	114
Fig. 83: AI-INCIDENT: configuration	115
Fig. 84: AI-PARKING - Configuration of parking spots	119
Fig. 85: Camera position	124
Fig. 86: Camera positions	128
Fig. 87: Camera positions	132