



# Technical Specifications



## MOBOTIX p26B Indoor PT

### Flexible And Compact. Adapts To Meet Your Requirements.

The MOBOTIX p26B Indoor PT is equipped with a light-sensitive 6-megapixel Moonlight sensor and manually adjustable lens (15° distance telephoto to 180° hemispheric) as standard, making it well suited for every indoor environment. Thanks to its competitive price, full range of MOBOTIX functions and inclusion of MxManagementCenter software free of charge, this system represents one of the most appealing indoor security solutions on the market. With the MxIOBoard-IC available as an accessory, the camera receives an additional MxBus connection, two inputs and two 12V outputs.

- Mx6 system platform 2nd generation, with MxBus, H.264 and ONVIF compatibility
- Recording on an internal MicroSD card (4 GB as standard)
- For ceiling installation, optional on-wall set
- Manual tilting and panning function
- MxAnalytics Video Analysis tools as standard
- Variants with audio package (microphone and speaker)
- Integrated vibration and temperature sensor

## Technical Specifications

### MOBOTIX p26B Indoor PT

Camera Variants	p26B Body Day Or Night Lens For Self-Assembly	p26B Day Complete Camera	p26B Night Complete Camera
Specialties	p26B Body with 6MP T Day or Night sensor, additional variants with audio package; all lenses (except MX-B016) available separately for self-assembly	Factory-assembled p26B Day or Night cameras with sharply focused lens; additional variants with audio package (microphone and speaker inside the camera housing)	
Lenses	p26B Body Day Or Night Lens For Self-Assembly	p26B Day Complete Camera	p26B Night Complete Camera
Fisheye Lens MX-B016 (f/2.0, 180° x 180°)	Not for p26B Body	Mx-p26B-6D016 Mx-p26B-AU-6D016	Mx-p26B-6N016 Mx-p26B-AU-6N016
Ultra Wide Lens MX-B036 (f/1.8, 103° x 77°)	Lens selection for p26B Body Day/Night	Mx-p26B-6D036 Mx-p26B-AU-6D036	Mx-p26B-6N036 Mx-p26B-AU-6N036
Super Wide Lens MX-B041 (f/1.8, 90° x 67°)	Body Day: Mx-p26B-6D with audio: Mx-p26B-AU-6D	Self-assembly only (without/with Audio)	Self-assembly only (without/with Audio)
Wide Lens MX-B061 (f/1.8, 60° x 45°)		Mx-p26B-6D061 Audio: self-assembly only	Self-assembly only (without/with Audio)
Standard Lens MX-B079 (f/1.8, 45° x 34°)	Body Night: Mx-p26B-6N with audio: Mx-p26B-AU-6N	Mx-p26B-6D079 Audio: self-assembly only	Self-assembly only (without/with Audio)
Tele Lens MX-B119 (f/1.8, 31° x 23°)		Mx-p26B-6D119 Audio: self-assembly only	Self-assembly only (without/with Audio)
Distant Tele Lens MX-B237 (f/1.8, 15° x 11°)		Mx-p26B-6D237 Audio: self-assembly only	Self-assembly only (without/with Audio)
Hardware	p26B Body Day Or Night Lens For Self-Assembly	p26B Day Complete Camera	p26B Night Complete Camera
Image sensor with individual exposure zones	Color or Black & White (B/W)	Color	B/W
Light sensitivity in lux at 1/60 s and 1/1 s	0.1/0.005 (Color) 0.02/0.001 (B/W)	0.1/0.005 (Color)	0.02/0.001 (B/W)

<b>Hardware</b>	<b>p26B Body Day Or Night Lens For Self-Assembly</b>	<b>p26B Day Complete Camera</b>	<b>p26B Night Complete Camera</b>
Image sensor (color or B/W sensor)	1/1.8" CMOS, 6MP (3072 x 2048), Progressive scan		
Tilt angle of lens	-5° to -45° (manually adjustable)		
Microprocessor	i.MX 6 Dual Core inkl. GPU (1 GB RAM, 512 MB Flash)		
H.264 Hardware Codec	Yes, bandwidth limitation available; output image format up to QXGA		
Protection classes	IP20 and IK06		
Intended use	Ceiling mounting, indoor use only, no EX area		
Ambient temperature (range, incl. storage)	0 to 40°C (32 to 104 °F)		
Internal DVR, ex works	4 GB (microSD)		
Microphone/speaker	Yes/Yes (variants with audio package only)		
16bit/16kHz HD wideband audio (Opus codec)	Yes (live and audio messages)		
Passive infrared sensor (PIR)	No		
Temperature sensor	Yes		
Shock detector (tamper detection)	Yes		
Power consumption (typically at 20°C/68°F)	5 watts		
PoE Class (IEEE 802.3af)	Class 2 or 3 (variable), factory setting: class 3		
Interfaces Ethernet 100BaseT/MxBus/USB	Yes (MxRJ45)/No/Yes		
Interface RS232	With MX-232-IO-Box (Order Nr: MX-OPT-RS1-EXT)		
Interfaces MxBus and I/O (2 outputs, 2 inputs)	With MxIOBoard-IC (Order Nr. Mx-A-IO-IC)		
Mounting options	Ceiling		
Dimensions (Height x Diameter)	89 x 120 mm		

## Technical Specifications

### MOBOTIX p26B Indoor PT

Hardware	p26B Body Day Or Night Lens For Self-Assembly	p26B Day Complete Camera	p26B Night Complete Camera
Weight	270 g		
Housing	PBT-30GF, color: white		
Standard accessory	Allen wrench, Lens wrench (depending on model), 0.5 m Ethernet patch cable Quick Install		
Detailed technical documentation	<a href="http://www.mobotix.com">www.mobotix.com</a> > Support > Download Center		
Online version of this document	<a href="http://www.mobotix.com">www.mobotix.com</a> > Support > Download Center		
MTBF	> 80,000 hours		
Certifications	EN55022:2010; EN55024:2010; EN50121-4:2006; EN61000-6-1:2007; EN 61000-6-2:2005; EN61000-6-3:2007+A1:2011; EN61000-6-4:2007+A1:2011; AS/ NZS CISPR22:2009+A1:2010; CFR47 FCC part15B		
Protocols	IPv4, IPv6, HTTP, HTTPS, FTP, FTPS, SFTP, RTP, RTSP, UDP, SNMP, SMTP, DHCP (client and server), NTP (client and server), SIP (client and server) G.711 (PCMA and PCMU) and G.722		
Manufacturer's warranty (since May 2018)	5 years		



p26 camera body und lenses B036 to B237 for self-mounting



p26 camera, lens B016-B237



MxIOBoard-IC for signal input/output (accessories)



<b>Image Formats, Frame Rates, Image Storage</b>	<b>p26B Body Day Or Night Lens For Self-Assembly</b>	<b>p26B Day Complete Camera</b>	<b>p26B Night Complete Camera</b>
Available video codecs	MxPEG/MJPEG/H.264		
Image formats	Freely configurable format 4:3, 8:3, 16:9 or customized format (Image Cropping), such as 2592x1944 (5MP), 2048x1536 (QXGA), 1920x1080 (Full-HD), 1280x960 (MEGA)		
Multistreaming	Yes		
Multicast stream via RTSP	Yes		
Max. image format	6MP (3072 x 2048)		
Max. frame rate (fps, only single core used)	MxPEG: 42@HD(1280x720), 34@Full-HD, 24@QXGA, 15@5MP, 12@6MP MJPEG: 26@HD(1280x720), 13@Full-HD, 9@QXGA, 5@5MP, 4@6MP H.264: 25@Full-HD, 20@QXGA		
Number of images with 4 GB microSD (internal DVR)	CIF: 250,000, VGA: 125,000, HD: 40,000, QXGA: 20,000, 6MP: 10,000		
<b>General Functions</b>	<b>p26B Body Day Or Night Lens For Self-Assembly</b>	<b>p26B Day Complete Camera</b>	<b>p26B Night Complete Camera</b>
Digital zoom and pan	Yes		
ONVIF compatibility	Yes (Profile S)		
Genetec protocol integration	Yes		
Programmable exposure zones	Yes		
Snapshot recording (pre/-post-alarm images)	Yes		
Continuous recording with audio	Yes (variants with audio package only)		
Event recording with audio	Yes (variants with audio package only)		
Time controlled flexible event logic	Yes		
Weekly schedules for recordings and actions	Yes		

## Technical Specifications

### MOBOTIX p26B Indoor PT

---

<b>General Functions</b>	<b>p26B Body Day Or Night Lens For Self-Assembly</b>	<b>p26B Day Complete Camera</b>	<b>p26B Night Complete Camera</b>
Event video and image transfer via FTP and email	Yes	Yes	Yes
Playback and QuadView via web browser	Yes	Yes	Yes
Bidirectional audio in browser	Yes (variants with audio package only)	Yes	Yes
Animated logos on the image	Yes	Yes	Yes
Master/Slave functionality	Yes	Yes	Yes
Privacy zone scheduling	Yes	Yes	Yes
Customized voice messages	Yes (variants with audio package only)	Yes	Yes
VoIP telephony (audio, alert)	Yes (variants with audio package only)	Yes	Yes
Remote alarm notification (network message)	Yes	Yes	Yes
Programming interface (HTTP-API)	Yes	Yes	Yes
DVR	Inside camera via microSD card, externally via USB device and NAS, different streams for live image and recording, MxFFS with archive function, pre-alarm an post-alarm images, monitoring recording with failure reporting		
Camera and data security	User and group management, SSL connections, IP-based access control, IEEE802.1x, intrusion detection, digital image signature		
MxMessageSystem: Sending and receiving of MxMessages	Yes	Yes	Yes
<b>Video Analysis</b>	<b>p26B Body Day Or Night Lens For Self-Assembly</b>	<b>p26B Day Complete Camera</b>	<b>p26B Night Complete Camera</b>
Video Motion Sensor	Yes	Yes	Yes
MxActivitySensor	Yes	Yes	Yes
MxAnalytics	Yes (Heatmaps, counting corridors)	Yes	Yes

## Technical Specifications MOBOTIX p26B Indoor PT

Video Management Software	p26B Body Day Or Night Lens For Self-Assembly	p26B Day Complete Camera	p26B Night Complete Camera
---------------------------	---	--------------------------	----------------------------

MxManagementCenter	Yes
--------------------	-----

Mobile MOBOTIX App	Yes
--------------------	-----



### Standard Delivery p26




Item	Count	Part Name
1.1	1	Housing with spring clips and tiltable camera receptacle (installed)
1.2	1	Back cover (installed)
1.3	1	Main board with lens mount (installed)
1.4	1	Lens (only installed in camera models listed in «Variants of the p26»)
1.5	1	Blind cover (only when self-mounting the lens)
1.6	1	Ethernet patch cable, 50 cm/19.7 in, black (installed)
1.7	1	MicroSD card pre-installed (SDHC installed, SDXC supported)
1.8	1	Flat-head screwdriver, blue
1.9	1	Lens wrench red (not with hemispheric variants with lens B016)
1.10	1	Allen wrench 1.5 mm

**Technical Specifications**  
**MOBOTIX p26B Indoor PT**

---





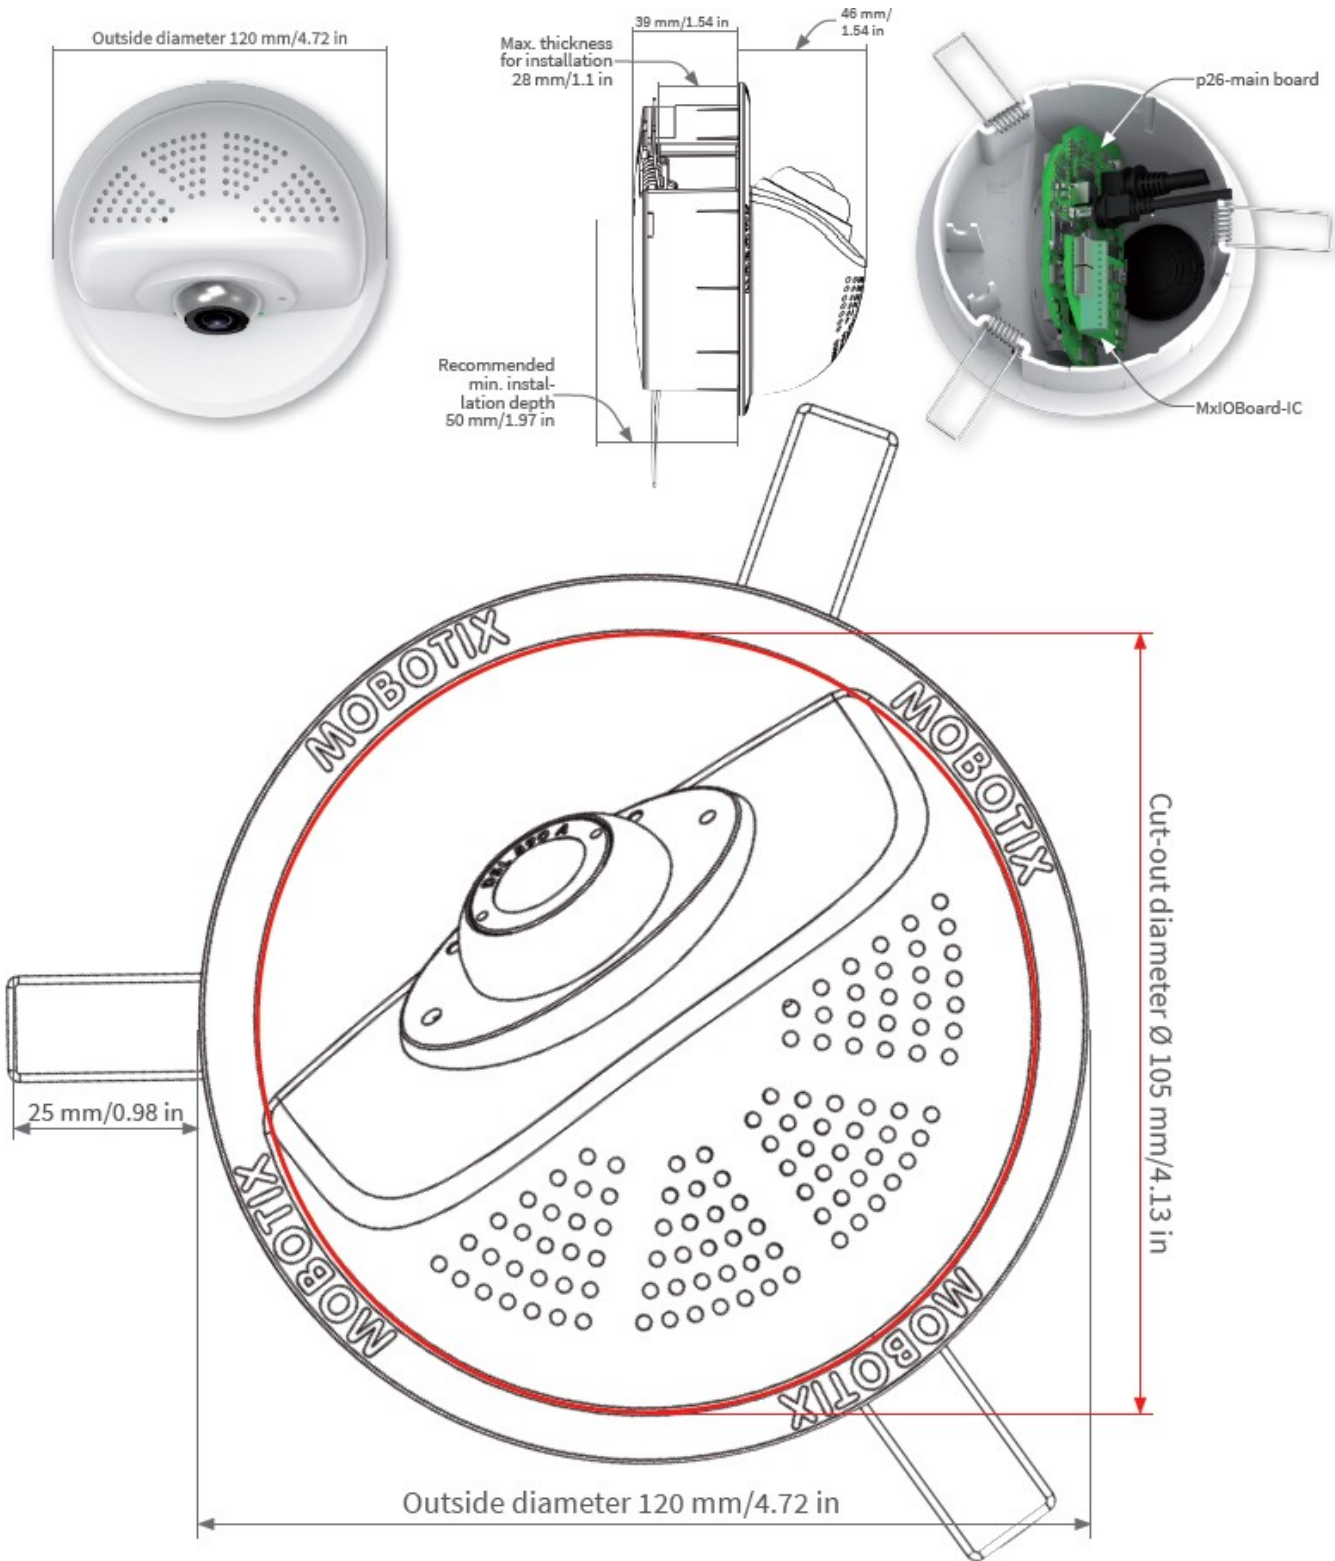

# MOBOTIX

BeyondHumanVision

[EN\\_08/23](#)

MOBOTIX AG • Kaiserstrasse • D-67722 Langmeil • Tel.: +49 6302 9816-103 • [sales@mobotix.com](mailto:sales@mobotix.com) • [www.mobotix.com](http://www.mobotix.com)

MOBOTIX is a trademark of MOBOTIX AG registered in the European Union, the U.S.A., and in other countries. Subject to change without notice. MOBOTIX do not assume any liability for technical or editorial errors or omissions contained herein. All rights reserved. © MOBOTIX AG 2019