



# Technical Specifications

## MOBOTIX S ONE DUAL - Invisible Power. Visible Results.

With the MOBOTIX S ONE DUAL, MOBOTIX presents the next generation of modular premium dual cameras. It builds on the success of the S16 DualFlex and takes the concept to a new level of performance: two freely positionable 4K UHD sensor modules for 8K dual images, a compact, concealed camera housing, and AI-based edge analysis that runs simultaneously on both sensor channels for the first time.

The S ONE DUAL was developed for industrial requirements, mobile applications, and security-critical environments—it is robust, weatherproof, durable, and energy-efficient (PoE, <10 W).

- Two modular 4K UHD sensor modules – freely positionable for one or two viewing angles
- Compact, concealed camera housing – protected against tampering and external access
- Exceptionally robust: IP66, IK10, NEMA 4X, operating temperature –40 to 65 °C/–40 to 149 °F
- AI-ready with built-in MxActivitySensorONE for reliable object detection
- Up to 2 TB internal storage, with 64 GB microSD card preinstalled
- Comprehensive codec support: H.264, H.265, MxPEG+, MJPEG
- Versatile deployment options: e.g. vehicles (buses, trains, etc.), industrial machines and production systems, video-controlled access or barrier systems, warehouse logistics and discreet surveillance applications

# Table of Contents

|   |           |
|---|-----------|
| <b>Order Information</b> .....          | <b>2</b>  |
| <b>Hardware</b> .....                   | <b>2</b>  |
| <b>Image and Video Properties</b> ..... | <b>5</b>  |
| <b>General Software Features</b> .....  | <b>6</b>  |
| <b>Video Analysis</b> .....             | <b>7</b>  |
| <b>Video Management Software</b> .....  | <b>7</b>  |
| <b>Accessories</b> .....                | <b>8</b>  |
| <b>Dimensions</b> .....                 | <b>10</b> |

## Order Information

|             |                          |
|-------------|--------------------------|
| Name        | MOBOTIX S ONE DUAL       |
| Order Code: | Mx-ONE-S1A-D (Body only) |

---

## Hardware

| Feature                            | Properties   |
|------------------------------------|--|
| Image sensor (color or B&W sensor) | Up to 4K UHD 3840x2160, 16:9, 1/1.8"                                   |
| Available Lenses                   | See <a href="#">Sensormodules Standard (4K Day &amp; Night)</a> , p. 8 |
| Light sensitivity                  | Color sensor: 0.1 lx @ 1/60 s; 0.005 lx @ 1 s                          |
| Exposure control                   | Manual and automatic mode<br>1 s to 1/16.000 s                         |
| IK protection class                | Sensor modules: IK10   |
| IP / NEMA protection class         | Housing: IP66<br>Sensor modules: IP66/NEMA 4X                          |

---

| <b>Feature</b>   | <b>Properties</b>  |     |         |       |  |          |  |
|--|--|-----|---------|-------|--|----------|--|
| Intended use   | Do not use in hazardous areas (Ex area)  |     |         |       |  |          |  |
| Operating temperature range  | -40 to 65 °C/-40 to 149 °F   |     |         |       |  |          |  |
| Min. cold start temperature  | -30 °C/-22 °F  |     |         |       |  |          |  |
| Relative Humidity  | 95 % non-condensing  |     |         |       |  |          |  |
| Internal DVR Storage   | Internal microSD card (SDHC/SDXC), 64 GB out-of-the-box, max. 2 TB.  |     |         |       |  |          |  |
| I/Os   | <p>INPUT</p> <ul style="list-style-type: none"> <li>▪ Contact Closure (no galvanic isolation necessary) or up to 30 Vrms AC / 50 V DC</li> <li>▪ Switching thresholds <ul style="list-style-type: none"> <li>Input &gt;1.6 V leads to a detected HIGH</li> <li>Input &lt;0.9 V leads to a detected LOW (after a high)</li> </ul> </li> <li>▪ Max. length for cables: 50 m</li> </ul> <p>OUTPUT</p> <ul style="list-style-type: none"> <li>▪ 3x Dry contact, form A (max 30 Vrms / max, 50 V DC / 60 W / 2 A DC)</li> </ul> |     |         |       |  |          |  |
| Microphone   | <ul style="list-style-type: none"> <li>▪ Microphone integrated in ONE Sensor Modules):<br/>Sensitivity: -41 dB FS ±1 dB<br/>SNR 68 dBA<br/>AOP 133 dB SPL</li> </ul>   |     |         |       |  |          |  |
| Speaker  | <ul style="list-style-type: none"> <li>▪ External speaker required:<br/>1.8 W @ 8 Ω</li> </ul>   |     |         |       |  |          |  |
| Allowed cable dimensions for cables connected to the PCB terminals | <p><i>Conductor cross section</i></p> <table border="0"> <tr> <td>AWG</td> <td>26 - 20</td> </tr> <tr> <td>Rigid</td> <td>0.14 mm<sup>2</sup> - 0.5 mm<sup>2</sup></td> </tr> <tr> <td>Flexible</td> <td>0.14 mm<sup>2</sup> - 0.5 mm<sup>2</sup></td> </tr> </table>  | AWG | 26 - 20 | Rigid | 0.14 mm <sup>2</sup> - 0.5 mm <sup>2</sup> | Flexible | 0.14 mm <sup>2</sup> - 0.5 mm <sup>2</sup> |
| AWG  | 26 - 20  |     |         |       |  |          |  |
| Rigid  | 0.14 mm <sup>2</sup> - 0.5 mm <sup>2</sup>   |     |         |       |  |          |  |
| Flexible   | 0.14 mm <sup>2</sup> - 0.5 mm <sup>2</sup>   |     |         |       |  |          |  |
| Shock detector (tamper detection)                                  | Embedded in the camera housing   |     |         |       |  |          |  |
| PoE standard   | PoE (802.3af-2003) / Class 3   |     |         |       |  |          |  |
| Power consumption  | <p>Max. 12.95 W/270 mA (average can be significantly lower)</p> <p>Average in dual operation: 9.0 W</p>  |     |         |       |  |          |  |

## Technical Specifications

### MOBOTIX S ONE DUAL

---

| Feature                                | Properties   |
|--|--|
|  | Dual operation, WDR off: approx. 5.63 W<br>Dual operation, WDR on: approx. 6.27 W<br>MxActivitySensorONE per Sensor: approx. 1.4 W   |
| Electrical surge protection            | Overvoltage Protection Box (not part of the scope of delivery)   |
| Interfaces                             | <ul style="list-style-type: none"><li>▪ Ethernet 1000Base-T (RJ45 according to EIA/TIA-568B)</li><li>▪ Sensor Modules M1, M2</li><li>▪ USB 2.0/3.0 via USB-C connector</li><li>▪ 12-24 V DC power supply</li><li>▪ Input / Output</li><li>▪ Ext. Speaker</li><li>▪ microSD card, max. 2 TB</li></ul> |
| Mounting Options                       | Wall, ceiling, hidden installation; extensive selection of mounting accessories available (see <a href="#">Mounts, p. 9</a> )  |
| Dimensions<br>(height x width x depth) | 137.5 x 115 x 33 mm  |
| Weight                                 | 0.54 kg  |
| Housing                                | Aluminum, PBT-30GF   |
| Detailed technical documentation       | <a href="http://www.mobotix.com">www.mobotix.com</a> > <a href="#">Services</a> > <a href="#">Download Center</a> > <a href="#">Marketing &amp; Documentation</a>  |
| MTBF                                   | 100,000 hours  |
| Certificates                           | EN 55032, EN 55035, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 62368-1, EN 63000, AS/NZS CISPR32, 47 CFR Part 15b, NRTL  |
| Protocols                              | DHCP (client and server), DNS, ICMP, IGMP v3, IPv4, IPv6, HTTP, HTTPS, FTP, FTPS, NFS, NTP (client and server), MQTT, RTP, RTCP, RTSP, SFTP, SIP (client and server), SMB/CIFS, SNMP, SMTP, SSL/TLS 1.3, TCP, UDP, VLAN, VPN, Zeroconf/mDNS  |
| Manufacturer warranty                  | 5 years  |

## Image and Video Properties

| Feature                   | Properties  |
|---------------------------|---|
| Available video codecs    | <ul style="list-style-type: none"><li>▪ H.264, H.265</li><li>▪ MxPEG+</li><li>▪ MJPEG</li></ul> |
| Image resolutions         | VGA 640x360, XGA 1024x576, HD 1280x720, FullHD 1920x1080, QHD 2560x1440, 4K UHD 3840x2160       |
| Max. image resolution     | 4K UHD 3840x2160 (8MP)  |
| Multi streaming           | H.264, H.265  |
| Multicast stream via RTSP | Yes   |
| Max. frame rate           | MxPEG: 20@4K, H.264: 30@4K, H.265: 30@4K  |

---

## General Software Features

| Feature                      | Properties   |
|------------------------------|--|
| Software features            | <ul style="list-style-type: none"> <li>▪ H.264, H.265 Multistreaming</li> <li>▪ Multicast stream via RTSP</li> <li>▪ Digital pan, tilt, zoom/vPTZ (up to 8x zoom)</li> <li>▪ Genetec protocol integration</li> <li>▪ Programmable exposure zones</li> <li>▪ Snapshot recording (pre/post-alarm images)</li> <li>▪ Continuous recording</li> <li>▪ Event recording</li> <li>▪ Time-controlled flexible event logic</li> <li>▪ Weekly schedules for recordings and actions</li> <li>▪ Event video and image transfer via FTP and email</li> <li>▪ Playback and QuadView via web browser</li> <li>▪ Animated logos on the image</li> <li>▪ Master/Slave functionality</li> <li>▪ Privacy zone scheduling</li> <li>▪ Remote alarm notification (network message)</li> <li>▪ Programming interface (HTTP API)</li> <li>▪ MxMessageSystem</li> <li>▪ MQTT (Message Queuing Telemetry Transport)</li> </ul> |
| ONVIF compatibility          | Profile G, S, T, (M with later firmware release)   |
| Master/Slave functionality   | Yes  |
| Remote alarm notification    | Email, network message (HTTP/HTTPS), SNMP, MxMessageSystem   |
| DVR/image storage management | <ul style="list-style-type: none"> <li>▪ On internal microSD card</li> <li>▪ On external USB and NAS devices</li> <li>▪ Different streams for live image and recording</li> <li>▪ MxPEG+ only</li> </ul>   |

| Feature                   | Properties   |
|---------------------------|--|
|                           | <ul style="list-style-type: none"><li>▪ MxFFS with buffered archive, pre- and post-alarm images, storage monitoring with error reporting</li></ul> |
| Camera and data security  | User and group management, SSL connections, IP-based access control, IEEE 802.1X, intrusion detection, digital image signature                     |
| Digitally signed firmware | Yes (to prevent firmware file tampering)   |

## Video Analysis

| Feature                | Properties  |
|------------------------|---|
| Video motion detection | Yes   |
| MxActivitySensor       | Version 1.0, 2.1                                      |
| MxActivitySensorONE    | Motion and Loitering Detection of Person and Vehicles |
| MOBOTIX App support    | Yes, with a later FW release                          |

## Video Management Software

| Feature                | Properties   |
|------------------------|--|
| MOBOTIX HUB            | Yes<br><a href="http://www.mobotix.com">www.mobotix.com</a> > <a href="#">Services</a> > <a href="#">Download Center</a> > <a href="#">Software Downloads</a>                              |
| MxManagementCenter     | Yes (latest version recommended)<br><a href="http://www.mobotix.com">www.mobotix.com</a> > <a href="#">Services</a> > <a href="#">Download Center</a> > <a href="#">Software Downloads</a> |
| MOBOTIX Cloud          | Streaming & Events supported   |
| MOBOTIX LIVE App       | Yes (available in Google Play Store (Android) and Apple App Store (iOS)).  |
| 3rd Party VMS Software | See ONVIF Profile S, T and G specification   |

## Accessories

### Sensormodules Standard (4K Day & Night)

**NOTE!**

Lenses or sensors are not part of the scope of delivery.

| Lens                    | Sensor                               | Order Code        |
|-------------------------|--------------------------------------|-------------------|
| Fixed lens 120° WIDE    | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN040 |
| Fixed lens 95° WIDE     | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN050 |
| Fixed lens 60° WIDE     | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN080 |
| Fixed lens 45° STANDARD | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN100 |
| Fixed lens 30° TELE     | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN150 |
| Fixed lens 15° TELE     | 4K Sensor as D/N IR Cut / Microphone | Mx-ONE-SMA-8DN280 |

### Module Cables

**NOTE!**

The module cables are not part of the scope of delivery.

| Module Cable                    | Description  | Order Code:       |
|---------------------------------|--|-------------------|
| Sensor cable 1m straight-angled | <p>Sensor cable straight-angled, length 1 m/3.3 ft.</p> <ul style="list-style-type: none"> <li>▪ For connecting optical sensor modules and thermal sensor modules to the ONE S1x camera body.</li> <li>▪ Required for audio signals from the microphone in the sensor module.</li> </ul> | Mx-ONE-CBL-S01-AN |
| Sensor cable 2m straight-angled | Sensor cable straight-angled, length 2 m/6.6 ft.   | Mx-ONE-CBL-S02-AN |

| Module Cable | Description  | Order Code: |
|--------------|--|-------------|
|              | <ul style="list-style-type: none"> <li>■ For connecting optical sensor modules and thermal sensor modules to the ONE S1x camera body.</li> <li>■ Required for audio signals from the microphone in the sensor module.</li> </ul> |             |

## Mounts


The following mounts of the sensors from previous camera models are compatible.

### NOTE!

- The mounts are not part of the scope of delivery.
- There may be color deviations in the mounts of earlier camera generations.
- An already installed S16 PT-Mount (purchased before January 2020) is not compatible with an S ONE DUAL module.

| Mount Type                     | Description  | Order Code:  |
|--------------------------------|--|--------------|
| On-Wall Kit for PTMount, white | On-Wall Kit for PTMount, white incl. mounting parts.         | Mx-M-PTMA-OW |
| PTMount, white                 | Three axis adjustable mount                                  | Mx-M-PTMA    |
| SingleMount, white             | For surveillance of one area with one sensor module          | Mx-M-SLMA    |
| DualMount, white               | For surveillance of one to two areas with two sensor modules | Mx-M-DLMA    |

## Dimensions

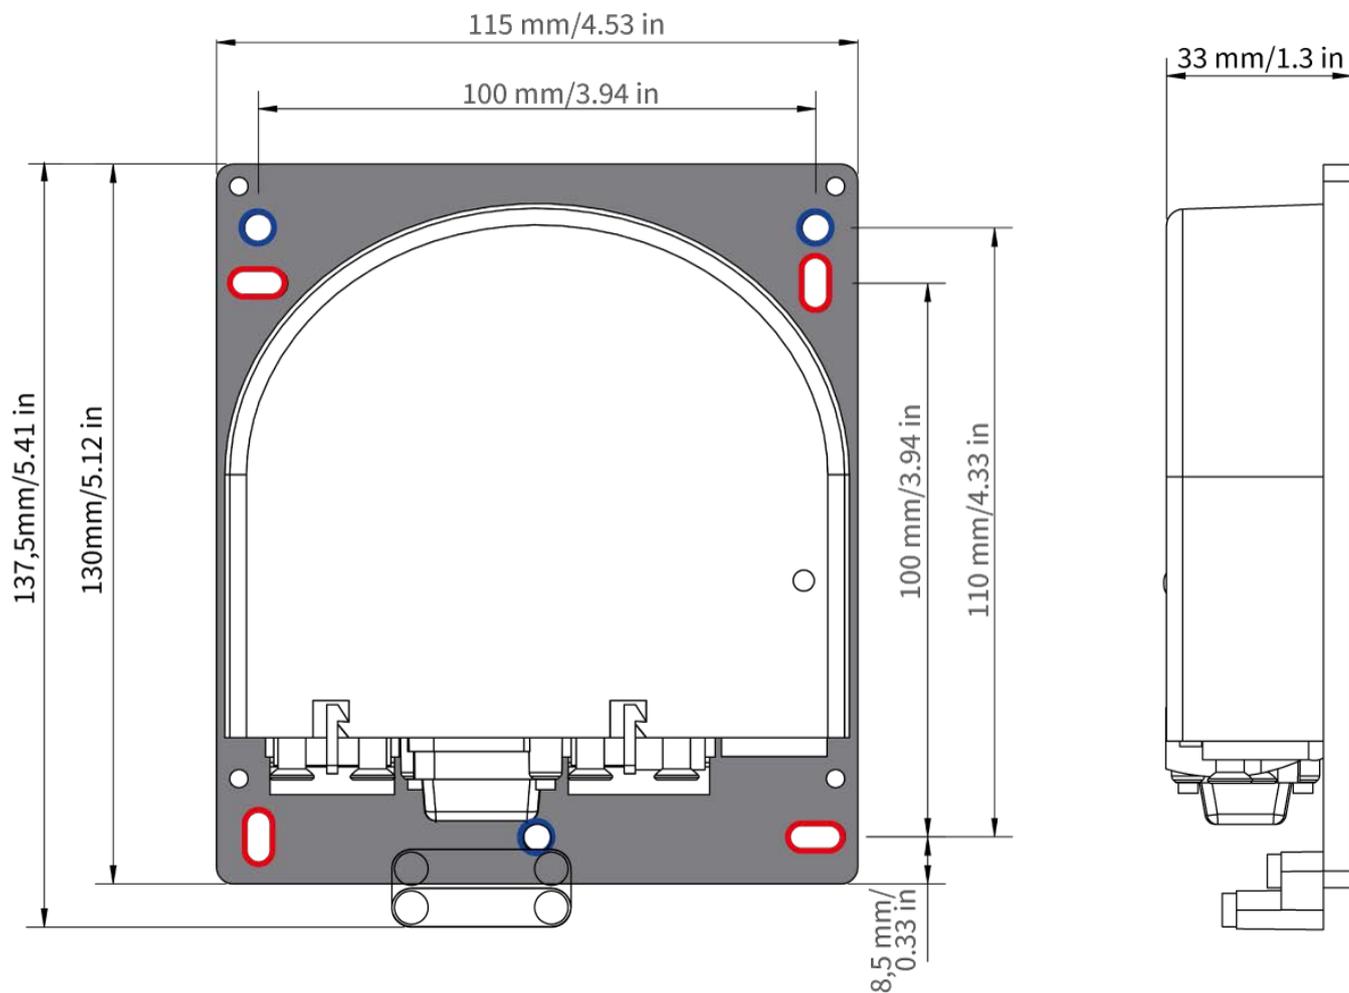

**NOTE!**

Download the drilling template from the section or on the MOBOTIX website: [www.mobotix.com](http://www.mobotix.com) > [Support](#) > [Download Center](#) > [Marketing & Documentation](#) > [Drilling Templates](#).

# MOBOTIX

BeyondHumanVision

EN\_03/26

MOBOTIX AG • Kaiserstrasse • D-67722 Langmeil • Tel.: +49 6302 9816-103 • sales@mobotix.com • www.mobotix.com

MOBOTIX is a trademark of MOBOTIX AG registered in the European Union, the U.S.A., and in other countries. Subject to change without notice. MOBOTIX do not assume any liability for technical or editorial errors or omissions contained herein. All rights reserved. © MOBOTIX AG 2019